


## Ultra-low power digital PDM XENSIV™ MEMS microphone

### Features

- Ultra-high signal to noise ratio (SNR) of 71.5dB(A)
- Ultra-low current consumption in high performance mode (430µA) and in low power mode (160µA)
- Seamless switching function for optimal balance between performance and power savings
- Component level IP57 water and dust resistant
- Flat frequency response with a low frequency roll-off at 11Hz
- Package dimensions: 4mm x 3mm x 1.2mm

### Potential applications

- Active Noise Cancellation (ANC) headphones and earbuds
- High quality audio capturing
  - Laptops and tablets
  - Conference systems
  - Cameras, camcorders, and camera accessories
- Devices with Voice User Interface (VUI)
  - Smart speakers
  - Home automation
  - IOT devices
- Industrial or home monitoring with audio pattern detection

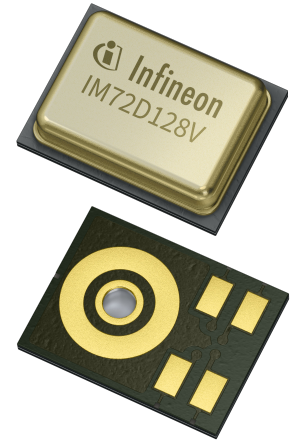

RoHS



Green



Halogen-free

### Product validation

Technology qualified for industrial applications.

Ready for validation in industrial applications according to the relevant tests of IEC 60747 and 60749 or alternatively JEDEC47/20/22.

### Description

The IM72D128VV01 is an ultra-high performance XENSIV™ MEMS microphone designed for applications which require a digital PDM MEMS microphone with high SNR (low self-noise), low distortion (high AOP), and very low current consumption.

Very high signal-to-noise ratio (SNR) of 71.5dB(A) enables far-field and low volume audio pick-up. The flat frequency response (11Hz low-frequency roll-off) and tight manufacturing tolerance improve performance of multi-microphone (array) applications.

The digital microphone ASIC contains an extremely low-noise preamplifier and a high-performance sigma-delta ADC. Different power modes can be selected in order to suit specific clock frequency and current consumption requirements. Each IM72D128VV01 microphone is calibrated with an advanced Infineon calibration algorithm, resulting in low sensitivity tolerances ( $\pm 1$ dB).

Additionally, IM72D128VV01 allows for switching between different power & performance profiles without any audible artifacts.

Type	Package	Marking
IM72D128VV01	PG-LLGA-5-3	I72D26

## Table of contents

	<b>Features</b> .....	1
	<b>Potential applications</b> .....	1
	<b>Product validation</b> .....	1
	<b>Description</b> .....	1
	<b>Table of contents</b> .....	2
<b>1</b>	<b>Block diagram</b> .....	3
<b>2</b>	<b>Environmental robustness</b> .....	3
<b>3</b>	<b>Typical performance characteristics</b> .....	4
<b>4</b>	<b>Acoustic characteristics</b> .....	6
<b>5</b>	<b>Free field frequency response</b> .....	7
5.1	Free field frequency response .....	7
<b>6</b>	<b>Electrical characteristics and parameters</b> .....	8
6.1	Absolute maximum ratings .....	8
6.2	Electrical parameters .....	8
6.3	Electrical characteristics .....	9
6.4	Audio DC offset .....	10
6.5	Stereo PDM configuration .....	11
<b>7</b>	<b>Package information</b> .....	12
<b>8</b>	<b>Footprint and stencil recommendation</b> .....	13
<b>9</b>	<b>Packing information</b> .....	14
<b>10</b>	<b>Reflow soldering and board assembly</b> .....	15
	<b>Revision history</b> .....	17
	<b>Disclaimer</b> .....	18

## 1 Block diagram

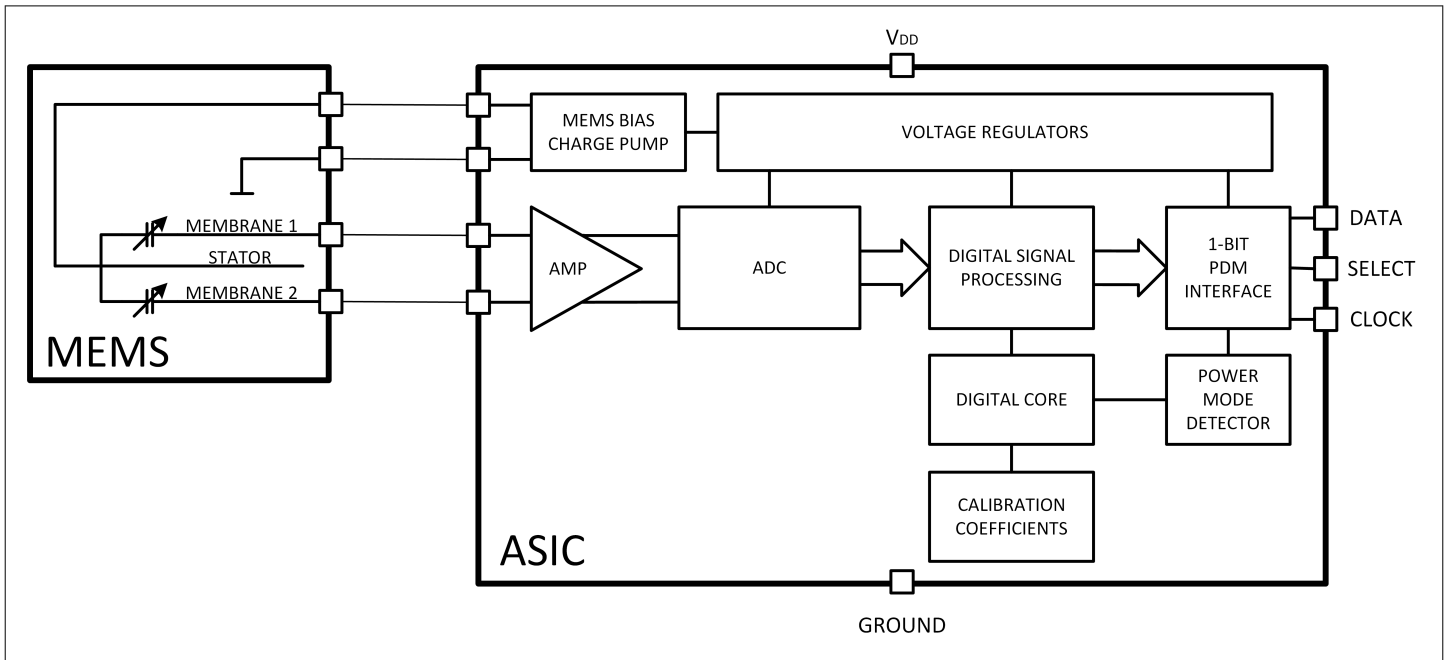


Figure 1 Block diagram

## 2 Environmental robustness

Infineon's latest Sealed Dual Membrane MEMS technology delivers high ingress protection (IP57) at a microphone level. The sealed MEMS design prevents water or dust from entering between membrane and backplate, preventing mechanical blockage or electric leakage issues commonly observed in MEMS microphones. Microphones built with the Sealed Dual Membrane technology can be used to create IP68 devices, requiring only minimal mesh protection.

Table 1 Environmental robustness

Test Standard	Test Condition
IP5x dust resistance <sup>1)</sup>	Arizona dust A4 coarse, vertical orientation, sound hole upwards, 10 cycles (15 minutes sedimentation, 6 sec blowing)
IPx7 water immersion <sup>2)</sup>	Temporary immersion of 1 meters for 30 minutes. Microphone tested 2 hours after removal


<sup>1)</sup> The number "5" stands for the dust ingress rating or the capacity to withstand the effects of fine, abrasive dust particles.

<sup>2)</sup> The "7" specifies the higher water immersion rating.


3 Typical performance characteristics

**3 Typical performance characteristics**


Test conditions:  $V_{DD}=1.8V$ ,  $f_{CLK}=3.072MHz$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.

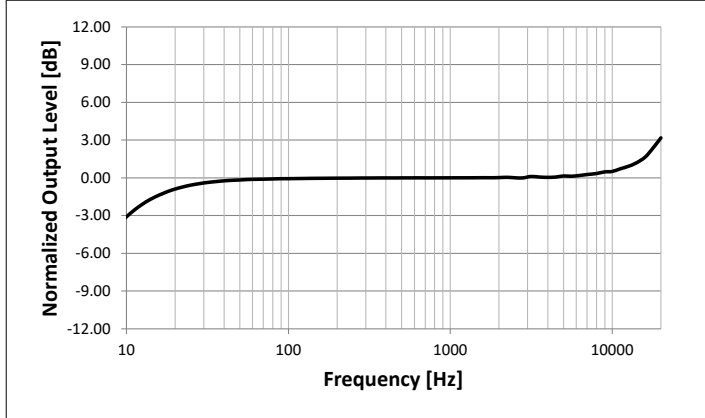


**Figure 2 Typical amplitude response**

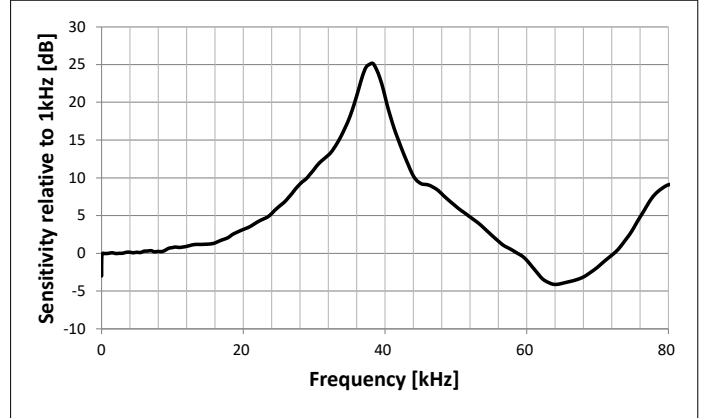


**Figure 3 Typical ultrasonic response**

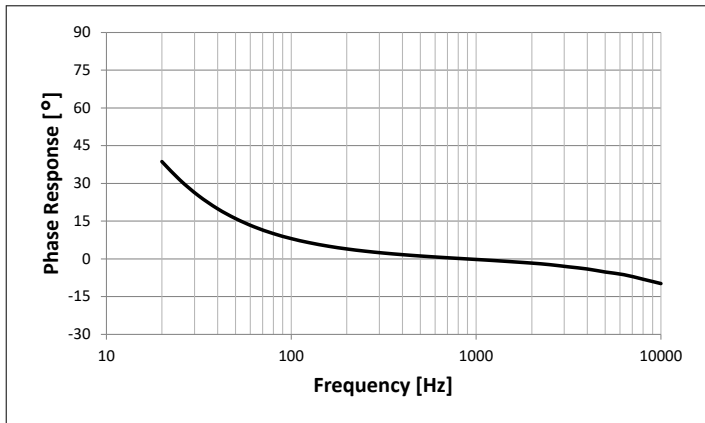


**Figure 4 Typical phase response**

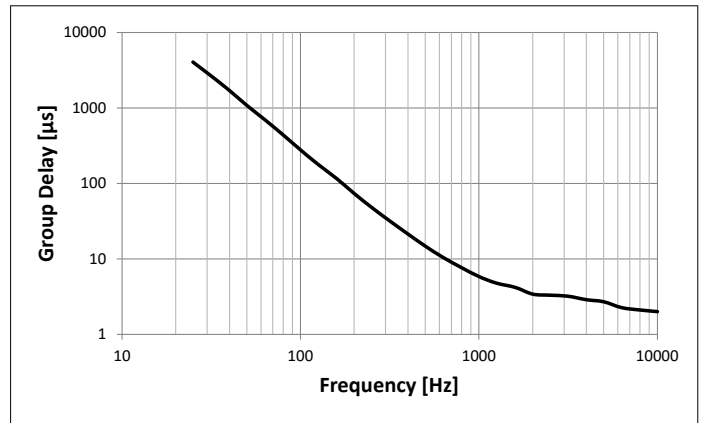

**Figure 5 Typical group delay**

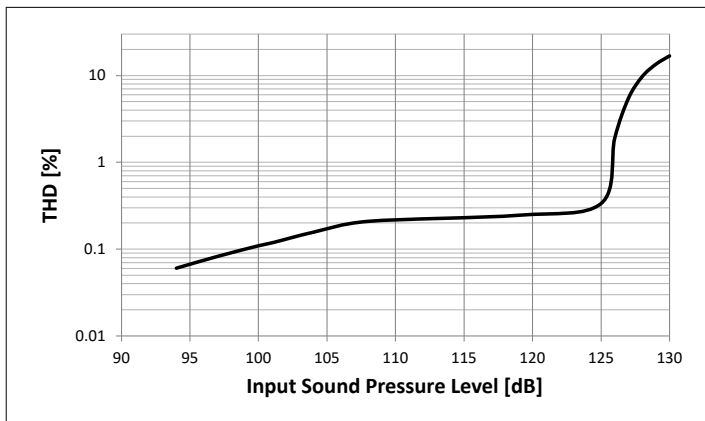


**Figure 6 Typical THD vs SPL**

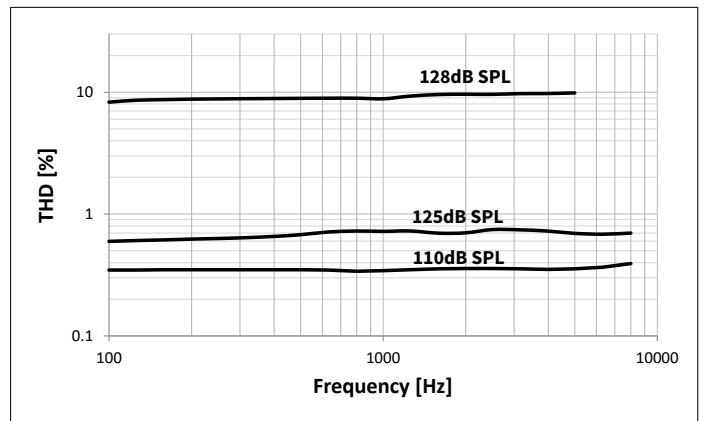


**Figure 7 Typical THD vs frequency**

**3 Typical performance characteristics**

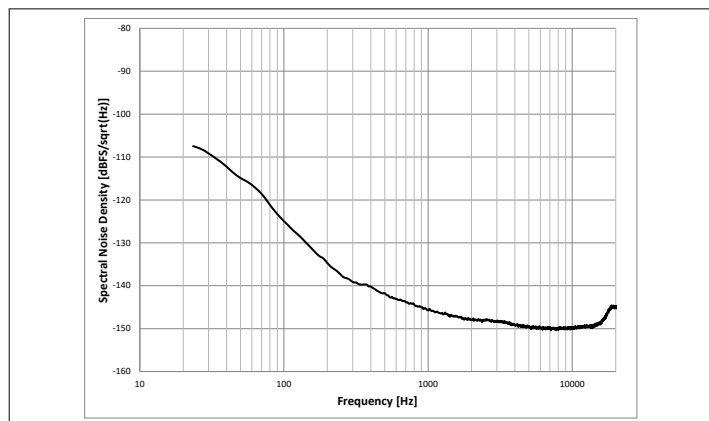

**Figure 8** Typical noise floor (unweighted)

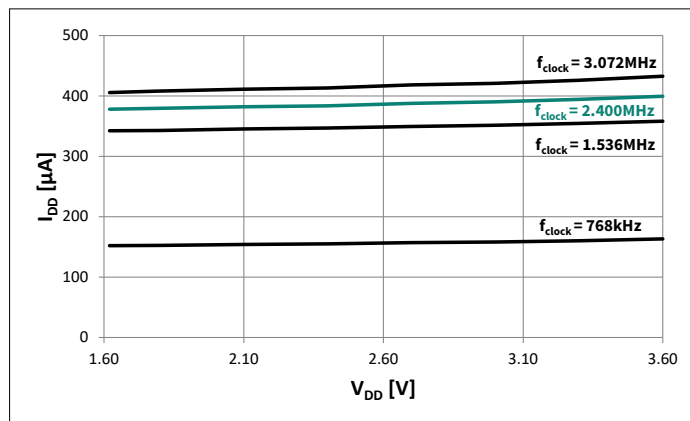

**Figure 9** Typical  $I_{DD}$  vs  $V_{DD}$

## 4 Acoustic characteristics

Test conditions (unless otherwise specified in the table):  $V_{DD} = 1.8V$ ,  $f_{CLK} = 3.072MHz$ ,  $OSR=64$ ,  $T_A = 25^{\circ}C$ , 55% R.H., audio bandwidth 20Hz to 20kHz, select pin grounded, no load on DATA,  $T_{edge} = 9ns$

**Table 2 Acoustic specifications**

Parameter	Symbol	Values			Unit	Note or Test Condition	
		Min.	Typ.	Max.			
Sensitivity	S	-37	-36	-35	dBFS	1kHz, 94dB SPL, all operating modes	
Low Frequency Roll-off	LFRO		11		Hz	-3dB relative to 1kHz	
Resonant Frequency Peak			37.5		kHz		
Signal to Noise Ratio	$F_{clock} = 768kHz$	SNR		67		dB(A)	20Hz to 8kHz bandwidth, OSR: 48, A-Weighted
	$F_{clock} = 1.536MHz$			70			
	$F_{clock} = 2.4MHz$			70.5			
	$F_{clock} = 3.072MHz$			71.5			
Total Harmonic Distortion	94dB SPL	THD		0.1		%	Measuring 2nd to 5th harmonics; 1kHz. S = typ, all operating modes
	125dB SPL			1.0			
	128dB SPL			10.0			
Acoustic Overload Point	10% THD	AOP		128		dB SPL	Measuring 2nd to 5th harmonics; 1kHz. S = typ, all operating modes
Group Delay	250Hz			60		$\mu s$	
	600Hz			10			
	1kHz			6			
	4kHz			3.5			
Phase Response	75Hz			11		°	
	1kHz			-0.3			
	4kHz			-4			
Directivity			Omnidirectional				
Polarity		Positive pressure increases density of 1's, negative pressure decreases density of 1's in data output					

## 5 Free field frequency response

### 5.1 Free field frequency response

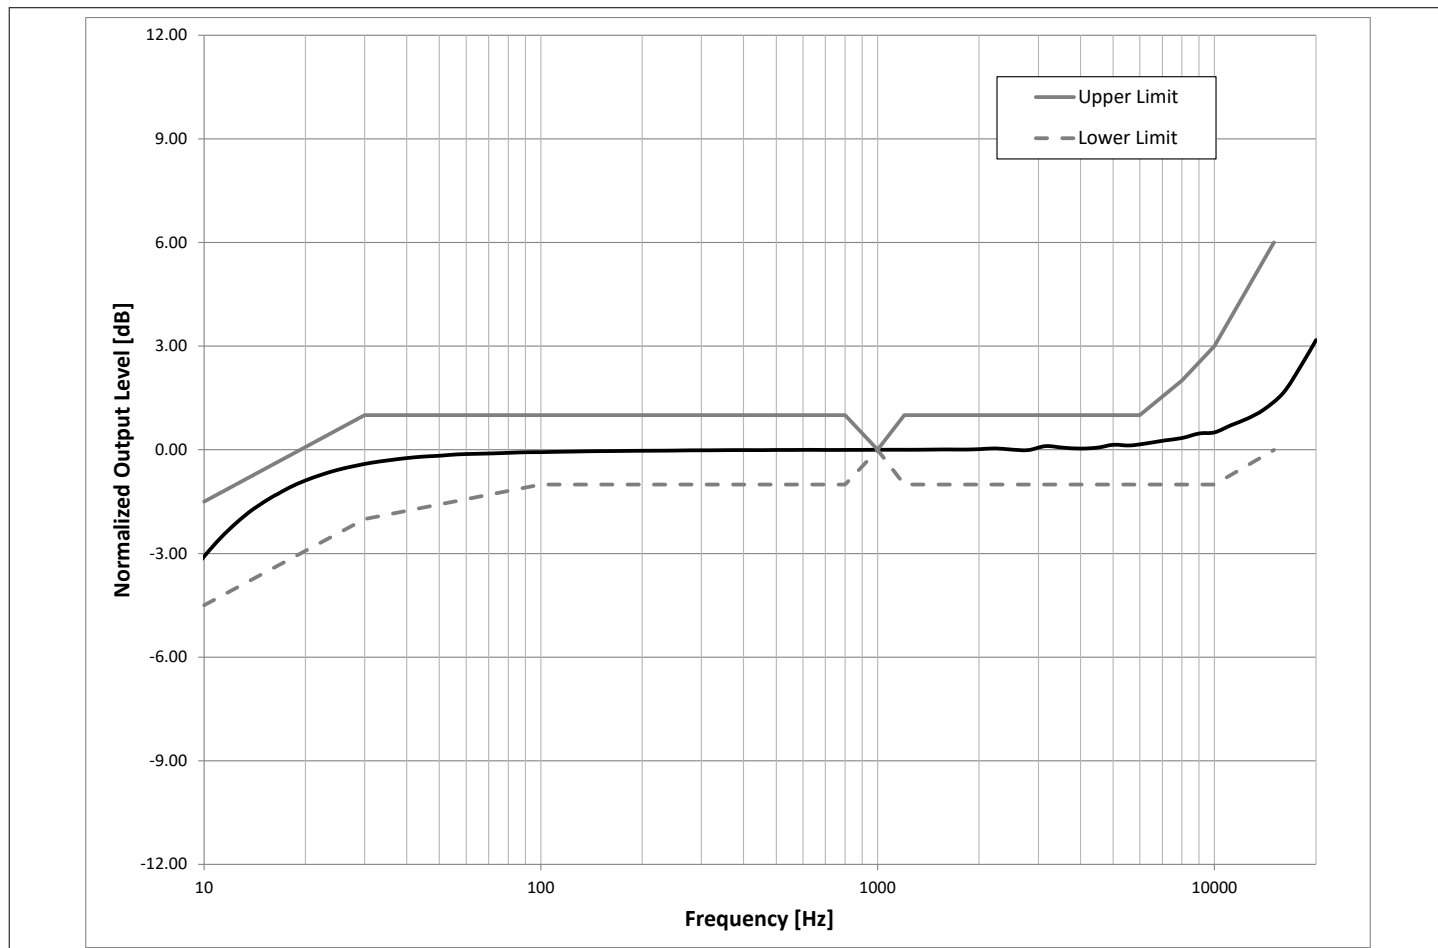


Figure 10 Free field frequency response

Table 3 Free field frequency response, normalized to 1kHz sensitivity value

Frequency [Hz]	Upper limit [dB]	Lower limit [dB]
10	-1.5	-4.5
30	1	-2
100	1	-1
800	1	-1
1000	0	0
1200	1	-1
6000	1	-1
8000	2	-1
10000	3	-1
15000	6	0

## 6 Electrical characteristics and parameters

### 6.1 Absolute maximum ratings

Stresses exceeding the listed maximum ratings may affect device reliability or cause permanent device damage. Functional device operation at these conditions is not guaranteed.

**Table 4 Absolute maximum ratings**

Parameter	Symbol	Values		Unit	Note / Test Condition
		Min.	Max.		
Voltage on any Pin	$V_{max}$		3.6	V	
Storage Temperature	$T_S$	-40	125	°C	
Ambient Temperature	$T_A$	-40	85	°C	

### 6.2 Electrical parameters

**Table 5 Electrical parameters and digital interface input**

Parameter	Symbol	Values			Unit	Note / Test Condition	
		Min.	Typ.	Max.			
Supply Voltage	$V_{DD}$	1.62	1.8	3.6	V	3)	
Clock Frequency Range	Standby Mode	$f_{clock}$			330	kHz	4)
	Low Power Mode		380	480	640	kHz	5)
			730	768	1020	kHz	
	Normal Mode		1.17	1.536	1.70	MHz	
	High Performance Mode		1.9	2.4	2.6	MHz	
2.9		3.072	3.4	MHz			
$V_{DD}$ Ramp-up Time				50	ms	Time until $V_{DD} \geq V_{DD\_min}$	
Input Logic Low Level	$V_{IL}$			$0.3 \times V_{DD}$	V		
Input Logic High Level	$V_{IH}$	$0.7 \times V_{DD}$			V		
Clock Rise/Fall Time				13	ns	10% to 90%	
Clock Duty Cycle		45		55	%		
Output Load Capacitance on DATA	$C_{load}$			100	pF		

<sup>3</sup> A 1 $\mu$ F bypass capacitor should be placed close to the microphone  $V_{DD}$  pad to ensure best SNR performance.

<sup>4</sup> Data pad is high impedance in standby mode.

<sup>5</sup> Parameter not subject to productive test. Verified by laboratory characterization/design.



### 6.3 Electrical characteristics

Test conditions (unless otherwise specified in the table):  $V_{DD} = 1.8V$ ,  $f_{CLK} = 3.072MHz$ ,  $T_A = 25^\circ C$ , 55% R.H.


**Table 6** General electrical characteristics

Parameter		Symbol	Values			Unit	Note / Test Condition	
			Min.	Typ.	Max.			
Current Consumption	Clock Off Mode	$I_{clock\_off}$			1	$\mu A$	CLOCK pulled low	
	Standby Mode	$I_{standby}$		90	120		No load on DATA	
	$f_{clock} = 768kHz$	$I_{DD}$		160	230		<5pF load on DATA	
	$f_{clock} = 1.536MHz$			350				
	$f_{clock} = 2.4MHz$			390				
	$f_{clock} = 3.072MHz$			430	525			
Short Circuit Current			1		20	mA	Grounded DATA pin	
Power Supply Rejection		$PSR_{1k\_NM}$		-80		dBFS	100mV <sub>pp</sub> sine wave on $V_{DD}$ swept from 200Hz to 20kHz.	
		$PSR_{217\_NM}$		-86		dBFS(A)	100mV <sub>pp</sub> , 217Hz square wave on $V_{DD}$ . A-weighted.	
Startup Time	$\pm 0.5dB$ sensitivity accuracy				20	ms	Time to start up in any operating modes after $V_{DD\_min}$ and CLOCK have been applied. <sup>6)</sup>	
	$\pm 0.2dB$ sensitivity accuracy				50			
Mode Switch Time	$\pm 0.5dB$ sensitivity accuracy				20	ms	Time to switch between operating modes. $V_{DD}$ remains on during the mode switch. <sup>6)</sup>	
	$\pm 0.2dB$ sensitivity accuracy				50			
Output Logic Low Level		$V_{OL}$			$0.2 \times V_{DD}$	V		
Output Logic High Level		$V_{OH}$	$0.8 \times V_{DD}$					
Delay Time for DATA Driven		$t_{DD}$	40		80	ns	Delay time from CLOCK edge ( $0.5 \times V_{DD}$ ) to DATA driven.	
Delay Time for DATA High-Z <sup>7)</sup>		$t_{HZ}$	5		30	ns	Delay time from CLOCK edge ( $0.5 \times V_{DD}$ ) to DATA high impedance state	
Delay Time for DATA Valid <sup>8)</sup>		$t_{DV}$			100	ns	Delay time from CLOCK edge ( $0.5 \times V_{DD}$ ) to DATA valid ( $< 0.3 \times V_{DD}$ or $> 0.7 \times V_{DD}$ )	
Power-on behaviour		Idle tone is output over PDM within 3ms of applying $V_{DD}$ and $f_{clock}$ , remains until a valid microphone signal is available. Idle tone consists of alternating 1s and 0s, representing a zero input signal.						

<sup>6)</sup> Verified at typical PDM clock frequencies for each power mode.

<sup>7)</sup>  $t_{hold}$  is dependent on  $C_{load}$

<sup>8)</sup> Load on data:  $C_{load} = 100pF$ ,  $R_{load} = 100k\Omega$

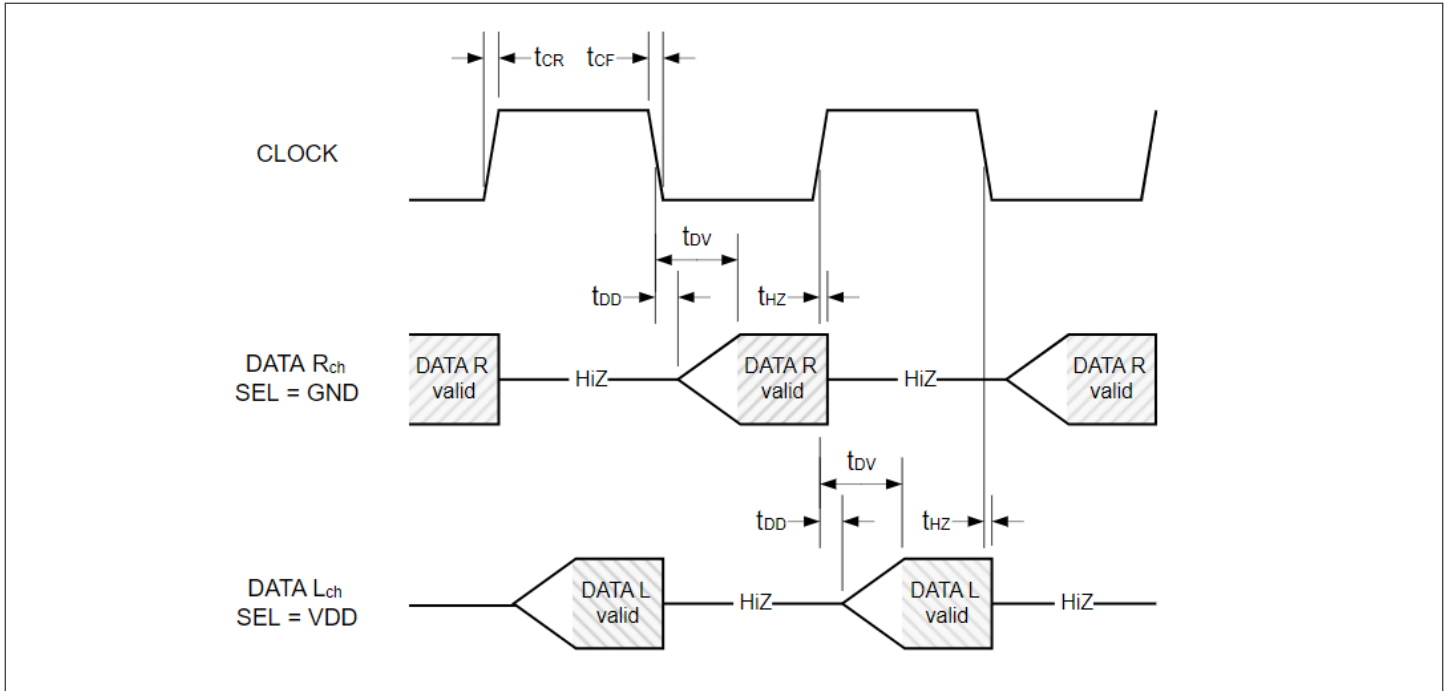

**Figure 11** Timing diagram

## 6.4 Audio DC offset

The DC output level encoded in the DC bit stream is determined by the L/R state on startup. In each case the DC output level is stable over time and does not vary with input signal level.

**Table 7** DC output level using L/R pin


LR state	DC output level (typical)	Unit
LR = GND	-80	dBFS
LR = VDD	-40	dBFS

## 6.5 Stereo PDM configuration

The IM72D128VV01 is designed to function in circuits with one or two microphones on the PDM bus. When two microphones are connected, data is transmitted alternately according to the L/R pin status of each microphone. When two microphones are connected to a shared PDM bus, the power modes of both microphones will be the same as both are controlled by the same PDM clock. The performance is unchanged relative to a single microphone per bus configuration.

**Table 8** PDM channel configuration using L/R pin.

Channel	Data driven	Data high-Z	L/R connection
DATA1	Falling clock edge	Rising clock edge	GND
DATA2	Rising clock edge	Falling clock edge	V <sub>DD</sub>

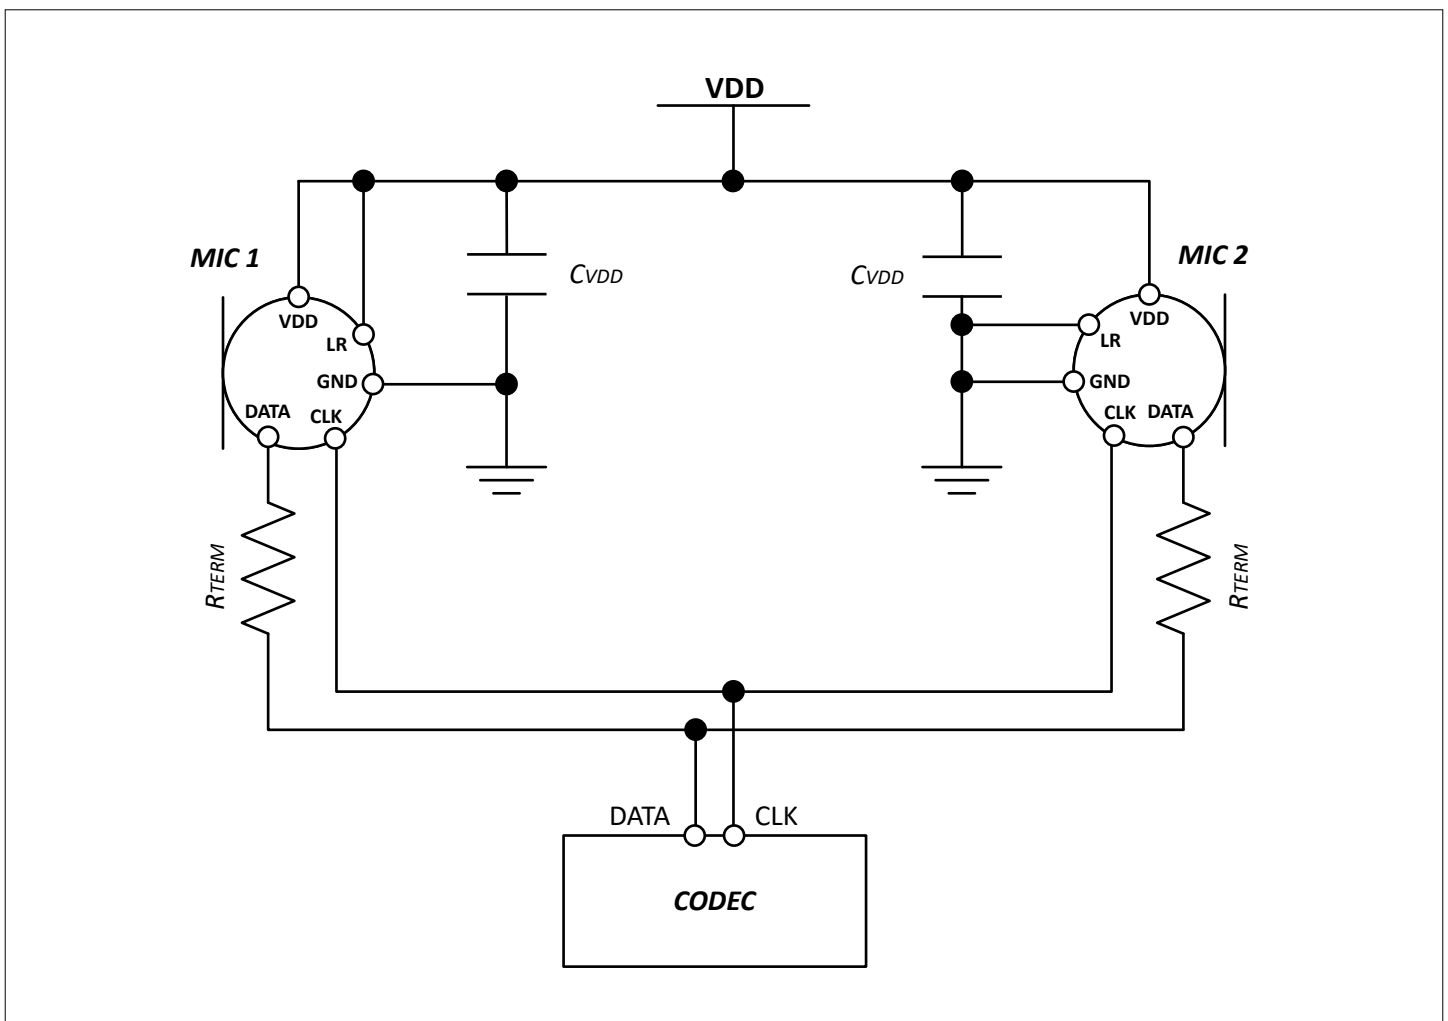

**Figure 12** Typical stereo mode configuration

**Note:** For best performance it is strongly recommended to place a 100nF ( $C_{VDD\_typ}$ ) capacitor between V<sub>DD</sub> and ground for each microphone. The capacitor should be placed as close to V<sub>DD</sub> as possible. A termination resistor ( $R_{TERM}$ ) of about 100Ω may be added to reduce the ringing and overshoot on the output signal.

## 7 Package information

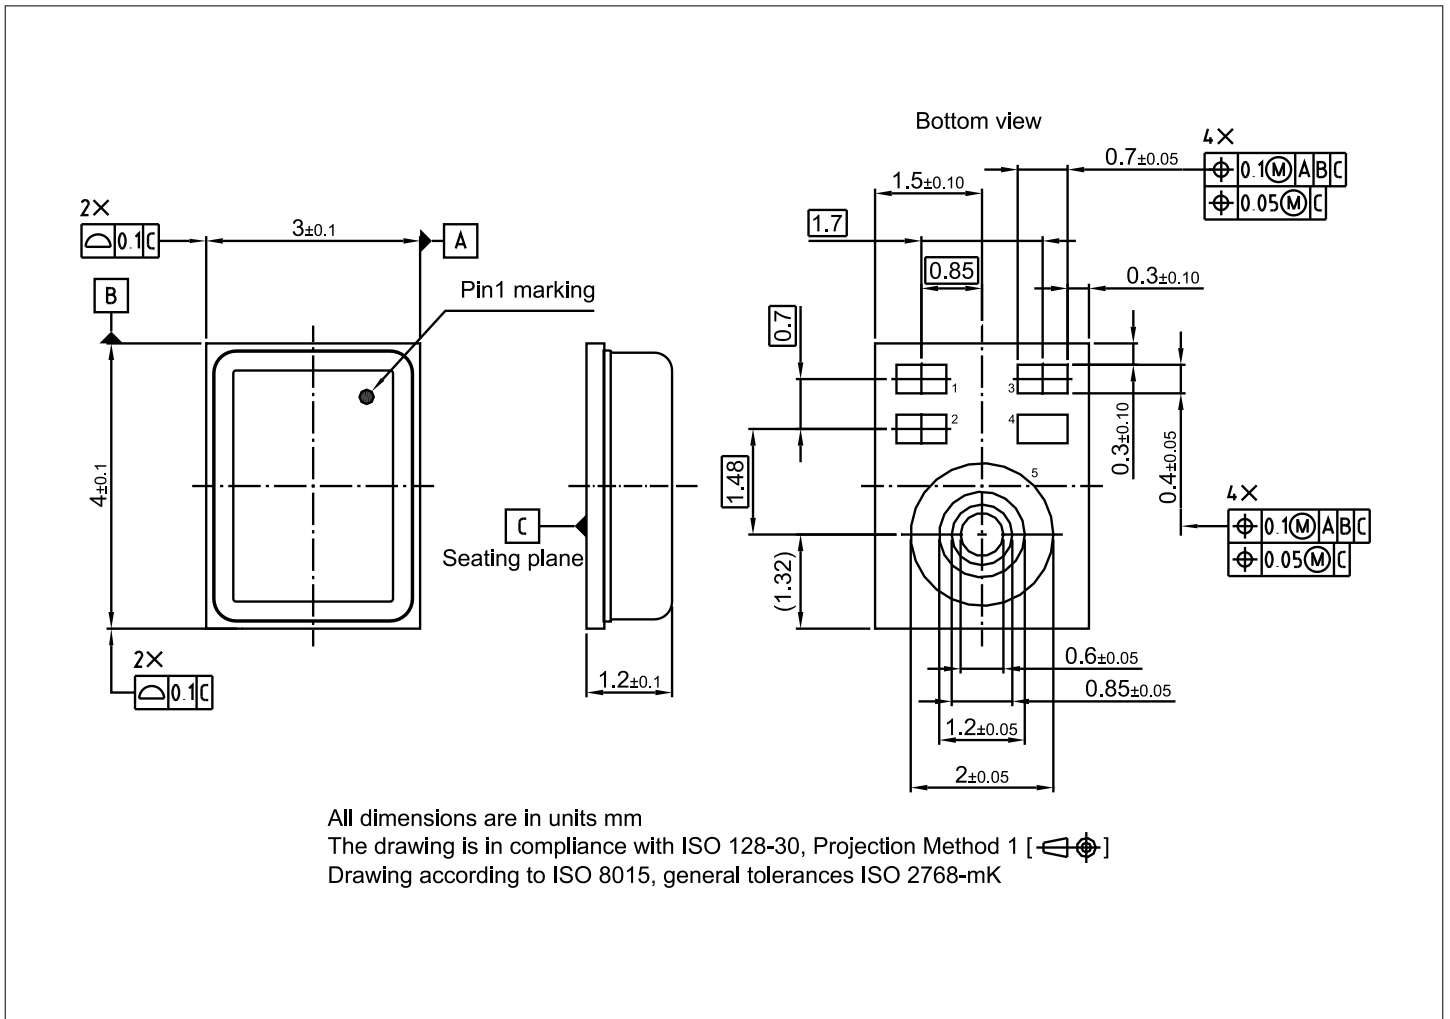


Figure 13 IM72D128VV01 package drawing


Table 9 IM72D128VV01 pin configuration

Pin Number	Name	Description
1	DATA	PDM data output
2	V <sub>DD</sub>	Power supply
3	CLOCK	PDM clock input
4	LR	PDM left/right select
5	GND	Ground

**8 Footprint and stencil recommendation**

The acoustic port hole diameter in the PCB should be larger than the acoustic port hole diameter of the MEMS microphone to ensure optimal performance. A PCB sound port size of radius 0.4mm (diameter 0.8 mm) is recommended.


The board pad and stencil aperture recommendations shown in [Figure 14](#) are based on Non-Solder Mask Defined (NSMD) pads. The specific design rules of the board manufacturer should be considered for individual design optimizations or adaptations.

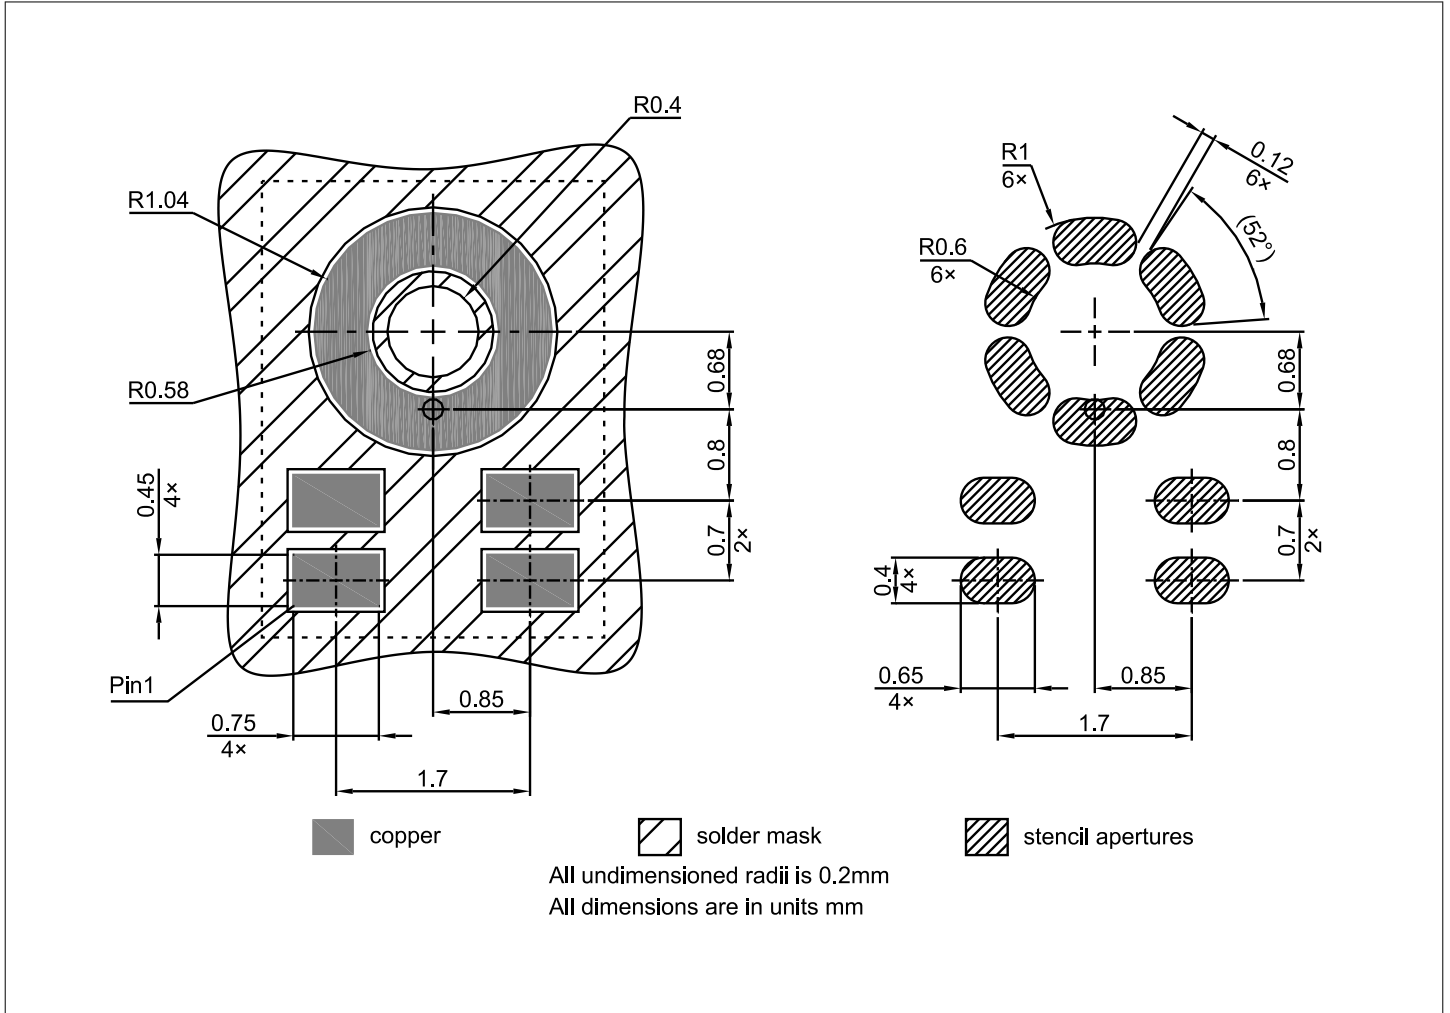

**Figure 14 Footprint and stencil recommendation**

## 9 Packing information

For shipping and assembly the Infineon microphones are packed in product specific tape-and-reel carriers. A detailed drawing of the carrier can be seen in

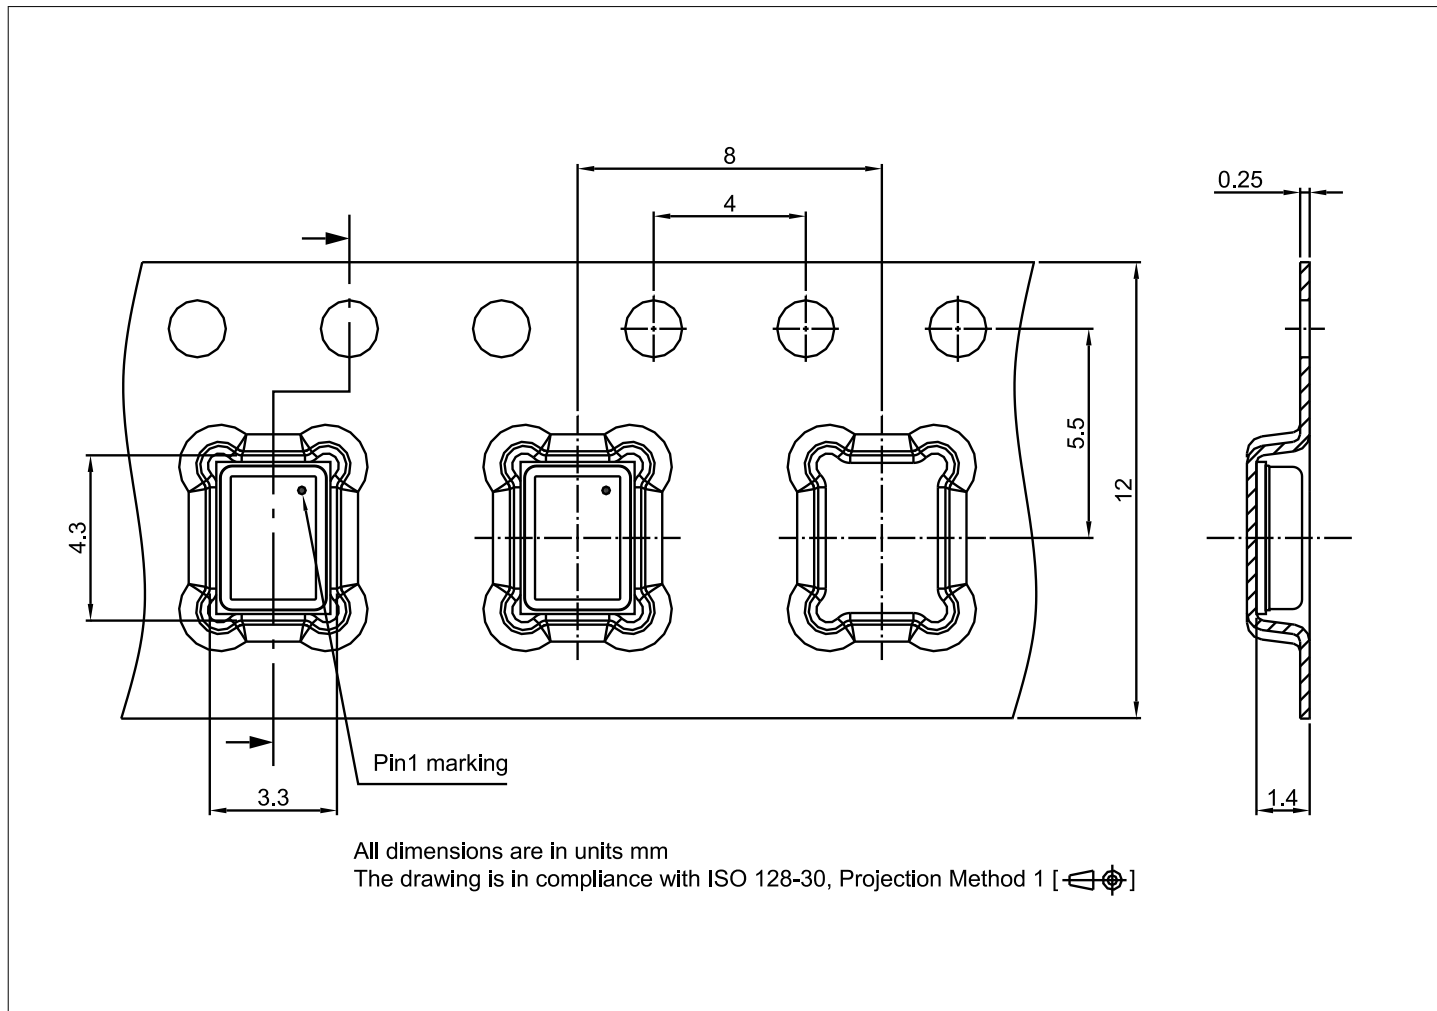

**Figure 15** IM72D128VV01 tape and reel packing information


**Table 10** IM72D128VV01 packaging information

Product	Type code	Reel diameter	Quantity per reel
IM72D128VV01	I72D26	13"	5000

## 10 Reflow soldering and board assembly

Infineon MEMS microphones are qualified in accordance with the IPC/JEDEC J-STD-020D-01. The moisture sensitivity level of MEMS microphones is rated as MSL1. For PCB assembly of the MEMS microphone the widely used reflow soldering using a forced convection oven is recommended.

The soldering profile should be in accordance with the recommendations of the solder paste manufacturer to reach an optimal solder joint quality. The reflow profile shown in Figure 16 is recommended for board manufacturing with Infineon MEMS microphones.

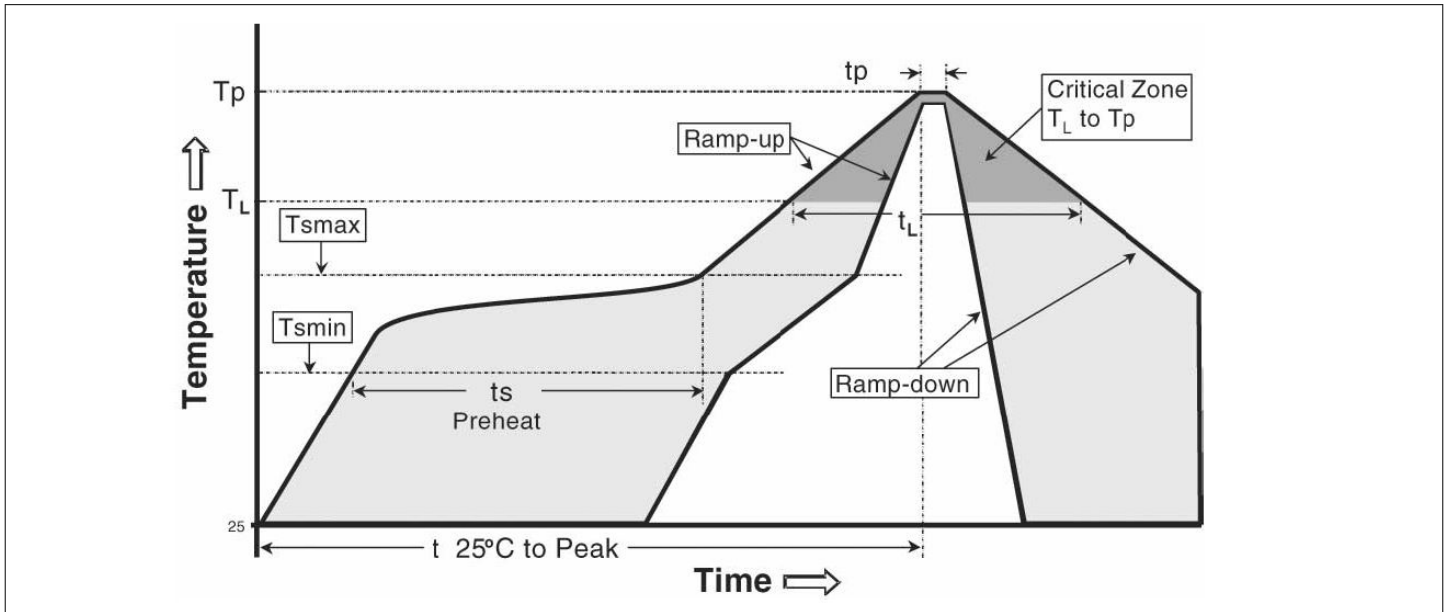

**Figure 16** Recommended reflow profile

**Table 11** Reflow profile limits

Profile feature	Pb-Free assembly	Sn-Pb Eutectic assembly
Temperature Min ( $T_{smin}$ )	150 °C	100 °C
Temperature Max ( $T_{smax}$ )	200 °C	150 °C
Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	60-120 seconds	60-120 seconds
Ramp-up rate ( $T_L$ to $T_p$ )	3 °C/second max.	3 °C/second max.
Liquidous temperature ( $T_L$ )	217 °C	183 °C
Time ( $t_L$ ) maintained above $T_L$	60-150 seconds	60-150 seconds
Peak Temperature ( $T_p$ )	260°C +0°C/-5°C	235°C +0°C/-5°C
Time within 5°C of actual peak temperature ( $t_p$ ) <sup>9)</sup>	20-40 seconds	10-30 seconds
Ramp-down rate	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	8 minutes max.	6 minutes max.

**Note:** For further information please consult the 'General recommendation for assembly of Infineon packages' document which is available on the Infineon Technologies [web page](#)

<sup>9</sup> Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum

The MEMS microphones can be handled using industry standard pick and place equipment. Care should be taken to avoid damage to the microphone structure as follows:

- Do not pick the microphone with vacuum tools which make contact with the microphone acoustic port hole.
- The microphone acoustic port hole should not be exposed to vacuum, this can destroy or damage the MEMS.
- Do not blow air into the microphone acoustic port hole. If an air blow cleaning process is used, the port hole must be sealed to prevent particle contamination.
- It is recommended to perform the PCB assembly in a clean room environment in order to avoid microphone contamination.
- Air blow and ultrasonic cleaning procedures shall not be applied to MEMS Microphones. A no-clean paste is recommended for the assembly to avoid subsequent cleaning steps. The microphone MEMS can be severely damaged by cleaning substances.
- To prevent the blocking or partial blocking of the sound port during PCB assembly, it is recommended to cover the sound port with protective tape during PCB sawing or system assembly.
- Do not use excessive force to place the microphone on the PCB. The use of industry standard pick and place tools is recommended in order to limit the mechanical force exerted on the package.



## Revision history

Document version	Date of release	Description of changes
v1.0	2024-06-05	Initial release

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2024-05-06**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2024 Infineon Technologies AG**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**IFX-hzg1711550963785**

## Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IM72D128VV01XTMA1](#)