
### **DIMENSIONS: mm (in.)**

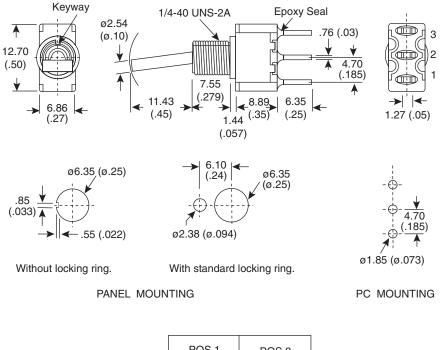

POS.1	POS.2
	4
ON	ON
2-3	2-1
1 0 2 Comm. 3	1 2 Comm3

SWITCH FUNCTION

#### **Mechanical Specifications:**

• Operating Temperature: -30°C to +85°C

#### Note:

RoHS Compliant by Exemption

#### **Electrical Specifications:**

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Rating: 2A/ 250VAC, 5A/ 120VAC or 28VDC
- Dielectric Strength: 1,000 V RMS@ sea level

#### Materials:

- Case: Diallyl phthalate (DAP)
- Acutuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Terminal/Contact: Silver plated



# Toggle Switch 108-1MS1T6B1M2QE-EVX

## Available from Mouser Electronics

www.mouser.com 1-800-346-6873

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mountain Switch: <u>108-1MS1T6B1M2QE-EVX</u>