
Rating	10A 250V AC	c 91 us	Mounting Hole	Cricuit Diagram	
	10A 250V AC	CALOS	16±0.1		
Insulation Resistance	DC 500V 100M	ohm Min		Nil	
Dielectric Strength	AC 1500V 1 minute		015%		
Fuse Size	Ø6.4*30		27570		






Housing: Black,PF

Top cap: Black, PF
Terminals: Nickel Plated Brass



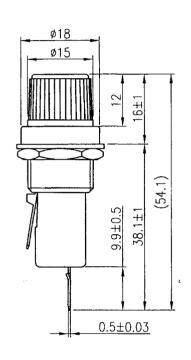





Tolerances Unless Otherwise Specified ±0.3 mm

T									7
									7
Date	Name	Description						No).
Drawn	Checked	Approved	SCI BOM No.	1310928		Model Name	FUSE HO		
袁浩徐		Smeen	Customer No.	112-R3-13E		Model No.	R3-13E		Rev.
09/24/'19		10/8-19	Unit	mm Shin Chin Industrial Co., L				Ltd.	0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Shin Chin: