



www.lemo.com

### **SUMMARY**

#### # Wires

Low voltage 2



Image is for illustrative purpose only

Series 2S

**Termination type** Female print PCB

IP rating 50

AWG wire size 24.00 - 16.00 Cable Ø 0.00 - 0.00 mm

Status active

Matching parts FFP.2S.302.CLAC32

#### **Download**

Request a quote
PCB Eagle Pattern
PCB Altium Pattern
PCB KiCad Pattern

Catalog

### **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model ECP\*: Fixed receptacle with two nuts, long threaded shell, with straight contact for printed

circuit (back panel mounting)

Keying Hermaphroditic keying (half moon insert) with female pin 1

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

**Weight** 15.44 g

#### **Performance**

Configuration 2S.302: 2 Low Voltage

Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 20 Amps

### **Specifications**

Contact Type: Print (straight) Vtest: 1700 V (AC), 2400 V (DC)

#### **Others**


Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +250°C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

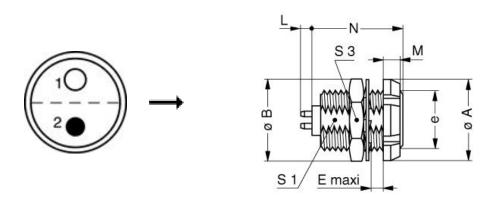



#### **Dimensions**

	Α	В	Е	М	N	<b>S</b> 1	<b>S</b> 3	e
mm.	20	19.5	11	3.5	20	13.5	17	M15x1.0
in.	0,79	0,77	0,43	0,14	0,79	0,53	0,67	

## **RECOMMENDED BY LEMO**

#### **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

ECP.2S.302.CLN