

www.lemo.com

FGG.2K.436.CJLC50

SUMMARY

Wires

High voltage 6



Image is for illustrative purpose only

2K **Series**

Female solder Termination type

IP rating 68

AWG wire size 0.00 - 0.00 Cable Ø 4.60 - 5.00 mm

Status active

Matching parts EGG.2K.436.CJA

Download

Request a quote

TECHNICAL DETAILS

Mechanics

Shell Style/Model FG*: Straight plug, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material**

brass latch sleeve and mid pieces

Weight 41.82 g

Performance

2K.436: 6 High Voltage Configuration

Insulator J: PEEK/PEEK

Rated Current 3 Amps

Specifications

Contact Type: Solder Test voltage (kV DC) 9 Test voltage (kV AC) 6.4

Creepage distance min.: 4.7 mm

Others

Endurance (Shell): 5000 mating cycles


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

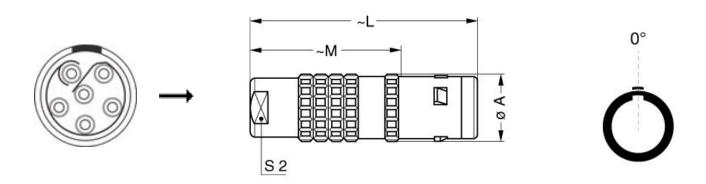

Dimensions

	А	L	М	S2
mm.	16	52	36	12
in.	0,63	2,05	1,42	0,47

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.2E.020.PA120
Caps: BFG.2K.100.NAS

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

FGG.2K.436.CJLC50