

www.lemo.com

PCA.1E.650.CTLC60

SUMMARY

Wires

Triax 1



Image is for illustrative purpose only

1E **Series**

Female solder Termination type

IP rating 68

AWG wire size 0.00 - 0.00 5.60 - 6.00 mm Cable Ø

Status active

Matching parts FFA.1E.650.CTAC60

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model PCA*: Free receptacle, cable collet

Keying Circular, female

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material**

brass latch sleeve and mid pieces

Weight 25.63 g

Performance

Configuration 1E.650: 1 Triax (50 Ohm)

Insulator T: PTFE **Rated Current** 6 Amps

Specifications

Contact Type: Solder

Vtest: 1200 V (AC), 1690 V (DC)

Impedance: 50 Ohm VSWR: 1.01 + 0.17 * f/GHz

Cable type: RGT 178, RGT 174, Belden 9222

Others


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 95 dB (10 MHz) Shielding (min): 80 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

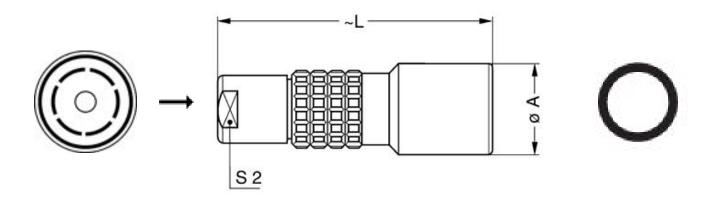

Dimensions

	Α	L	S2
mm.	15	45	9
in.	0,59	1,77	0,35

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1E.008.PA090

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

PCA.1E.650.CTLC60