

Description	Material	Finish
Body	Brass	Nickel
Pin	BE CU	Gold
Insulation	PTFE	N/A
Spacer	PTFE	N/A
Gasket	SI Rubber	Rubber
Support	Brass	Gold
Heat Shrink	Polyolefin	Black

REVISIONS			
REV	DESCRIPTION	DATE	APPV
Α	New frame; add heat shrink;	4/26/10	CJ
В	Updated drawing and dimensions; Added new title block	2-JUL-12	SAH

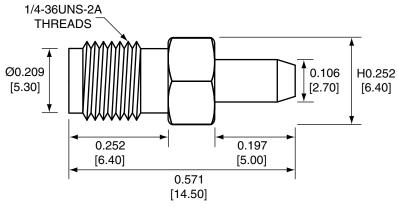

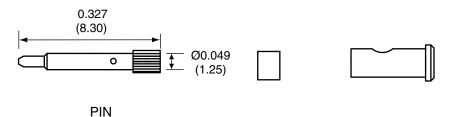


SPACER

SIDE VIEW

CONREVSMA011-R178 ASSEMBLY INSTRUCTIONS

- Strip cable to recommended dimensions.
- Slip heat shrink onto stripped cable.
- Solder the support onto the braid.
- Place the spacer onto the center conductor.
- Solder or crimp the pin onto the center conductor.
- Insert the pin, center conductor, spacer, and support into the body until the top of the pin is even to end of the body.
- Crimp the tail of the body onto the support with a 0.093" hex crimp tool (or one labeled for use with RG-178 cable).
- Use heat shrink to cover crimp.

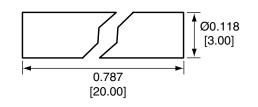


HEAT SHRINK

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. ALL DIMENSIONS ARE IN INCHES [mm].
- 2. DIMENSIONS APPLY AFTER FINISHING.
- MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE.

SUPPORT

4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.



DESIGNATED AGENTS. MATERIAL: TOLERANCES: PROJECTION: .020 [0.50]-.200 [5.00]=±.008 [0.20] .200 [5.00]-1.200 [30.00]= ±.016 [0.40] 4.75 [120.0]-4.75 [120.0]=±.024 [0.60] ANGLES: ±1° SIZE ANGLES: ±1° ANGLES: ±1 FINISH:

ENGR: S.HOGAN

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION

THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE

TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE

EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS

DRAWN: B.MURPHY DT: 2-JUL-12

SCALE: 2:1

DT: 2-JUL-12

TITLE:

RP-SMA FEMALE CABLE END CRIMP FOR RG-178 CABLE

159 ORT LANE

MERLIN, OR 97532

REV CONREVSMA011-R178 В

DO NOT SCALE DRAWING

RECOMMENDED CABLE STRIPPING DIMENSIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linx Technologies: CONREVSMA011-R178