

Thyristor \ Diode Module

$$V_{RRM} = 2 \times 1200 \text{ V}$$

$$I_{TAV} = 116 \text{ A}$$

$$V_T = 1.28 \text{ V}$$

Phase leg

Part number

MCD95-12io1B



Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			200	μA
		$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$			5	mA
V_T	forward voltage drop	$I_T = 150\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.29	V
		$I_T = 300\text{ A}$				1.50	V
		$I_T = 150\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.28	V
		$I_T = 300\text{ A}$				1.70	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 125^{\circ}\text{C}$			116	A
$I_{T(RMS)}$	RMS forward current	180° sine				182	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 125^{\circ}\text{C}$			0.85	V
r_T	slope resistance					2.4	m Ω
R_{thJC}	thermal resistance junction to case					0.22	K/W
R_{thCH}	thermal resistance case to heatsink				0.2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			455	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			2.25	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.43	kA
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			1.92	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.07	kA
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			25.3	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			24.6	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			18.3	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			17.7	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		119		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 125^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 250\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 116\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 125^{\circ}\text{C}$			1000	V/ μs
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			2.5	V
			$T_{VJ} = -40^{\circ}\text{C}$			2.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			150	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					10	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			450	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 150\text{ A}; V = \frac{2}{3} V_{DRM}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$	$T_{VJ} = 100^{\circ}\text{C}$		185		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				200	A
T_{VJ}	virtual junction temperature			-40		125	°C
T_{op}	operation temperature			-40		100	°C
T_{stg}	storage temperature			-40		125	°C
Weight					81		g
M_D	mounting torque			2.5		4	Nm
M_T	terminal torque			2.5		4	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4800			V
		t = 1 minute		4000			V



Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCD95-12io1B	MCD95-12io1B	Box	36	469467

Similar Part	Package	Voltage class
MCMA110PD1200TB	TO-240AA-1B	1200
MCMA140PD1200TB	TO-240AA-1B	1200

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 125^{\circ}\text{C}$



Thyristor

$V_{0\max}$	threshold voltage	0.85	V
$R_{0\max}$	slope resistance *	1.2	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions:

- Overall length: 92 ± 0.5
- Length from first pin center to end: 80 ± 0.3
- Pin 1 diameter: 10 ± 0.1
- Pin 1 to Pin 2 distance: 14.8
- Pin 2 to Pin 3 distance: 10 ± 0.1
- Pin 3 to Pin 4 distance: 5.5 ± 0.1
- Pin 4 to Pin 5 distance: 5.5 ± 0.1
- Pin 5 diameter: 4.4
- Pin 1 to Pin 3 distance: 25 ± 0.3
- Pin 3 to Pin 5 distance: 45 ± 0.3
- Pin 1 to Pin 5 distance: 65 ± 0.3
- Pin 1 to Pin 6 distance: 92 ± 0.5
- Pin 1 to Pin 7 distance: 80 ± 0.3
- Pin 1 to Pin 8 distance: 6
- Pin 1 to Pin 9 distance: 10
- Pin 1 to Pin 10 distance: 10
- Pin 1 to Pin 11 distance: 10
- Pin 1 to Pin 12 distance: 10
- Pin 1 to Pin 13 distance: 10
- Pin 1 to Pin 14 distance: 10
- Pin 1 to Pin 15 distance: 10
- Pin 1 to Pin 16 distance: 10
- Pin 1 to Pin 17 distance: 10
- Pin 1 to Pin 18 distance: 10
- Pin 1 to Pin 19 distance: 10
- Pin 1 to Pin 20 distance: 10
- Pin 1 to Pin 21 distance: 10
- Pin 1 to Pin 22 distance: 10
- Pin 1 to Pin 23 distance: 10
- Pin 1 to Pin 24 distance: 10
- Pin 1 to Pin 25 distance: 10
- Pin 1 to Pin 26 distance: 10
- Pin 1 to Pin 27 distance: 10
- Pin 1 to Pin 28 distance: 10
- Pin 1 to Pin 29 distance: 10
- Pin 1 to Pin 30 distance: 10
- Pin 1 to Pin 31 distance: 10
- Pin 1 to Pin 32 distance: 10
- Pin 1 to Pin 33 distance: 10
- Pin 1 to Pin 34 distance: 10
- Pin 1 to Pin 35 distance: 10
- Pin 1 to Pin 36 distance: 10
- Pin 1 to Pin 37 distance: 10
- Pin 1 to Pin 38 distance: 10
- Pin 1 to Pin 39 distance: 10
- Pin 1 to Pin 40 distance: 10
- Pin 1 to Pin 41 distance: 10
- Pin 1 to Pin 42 distance: 10
- Pin 1 to Pin 43 distance: 10
- Pin 1 to Pin 44 distance: 10
- Pin 1 to Pin 45 distance: 10
- Pin 1 to Pin 46 distance: 10
- Pin 1 to Pin 47 distance: 10
- Pin 1 to Pin 48 distance: 10
- Pin 1 to Pin 49 distance: 10
- Pin 1 to Pin 50 distance: 10
- Pin 1 to Pin 51 distance: 10
- Pin 1 to Pin 52 distance: 10
- Pin 1 to Pin 53 distance: 10
- Pin 1 to Pin 54 distance: 10
- Pin 1 to Pin 55 distance: 10
- Pin 1 to Pin 56 distance: 10
- Pin 1 to Pin 57 distance: 10
- Pin 1 to Pin 58 distance: 10
- Pin 1 to Pin 59 distance: 10
- Pin 1 to Pin 60 distance: 10
- Pin 1 to Pin 61 distance: 10
- Pin 1 to Pin 62 distance: 10
- Pin 1 to Pin 63 distance: 10
- Pin 1 to Pin 64 distance: 10
- Pin 1 to Pin 65 distance: 10
- Pin 1 to Pin 66 distance: 10
- Pin 1 to Pin 67 distance: 10
- Pin 1 to Pin 68 distance: 10
- Pin 1 to Pin 69 distance: 10
- Pin 1 to Pin 70 distance: 10
- Pin 1 to Pin 71 distance: 10
- Pin 1 to Pin 72 distance: 10
- Pin 1 to Pin 73 distance: 10
- Pin 1 to Pin 74 distance: 10
- Pin 1 to Pin 75 distance: 10
- Pin 1 to Pin 76 distance: 10
- Pin 1 to Pin 77 distance: 10
- Pin 1 to Pin 78 distance: 10
- Pin 1 to Pin 79 distance: 10
- Pin 1 to Pin 80 distance: 10
- Pin 1 to Pin 81 distance: 10
- Pin 1 to Pin 82 distance: 10
- Pin 1 to Pin 83 distance: 10
- Pin 1 to Pin 84 distance: 10
- Pin 1 to Pin 85 distance: 10
- Pin 1 to Pin 86 distance: 10
- Pin 1 to Pin 87 distance: 10
- Pin 1 to Pin 88 distance: 10
- Pin 1 to Pin 89 distance: 10
- Pin 1 to Pin 90 distance: 10
- Pin 1 to Pin 91 distance: 10
- Pin 1 to Pin 92 distance: 10
- Pin 1 to Pin 93 distance: 10
- Pin 1 to Pin 94 distance: 10
- Pin 1 to Pin 95 distance: 10
- Pin 1 to Pin 96 distance: 10
- Pin 1 to Pin 97 distance: 10
- Pin 1 to Pin 98 distance: 10
- Pin 1 to Pin 99 distance: 10
- Pin 1 to Pin 100 distance: 10

Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 200L (L = Left for pin pair 4/5) UL 758, style 3751



Thyristor



Fig. 1 Surge overload current I_{TSM} ,
 I_{FSM} : Crest value, t : duration



Fig. 2 I^2t versus time (1-10 ms)



Fig. 3 Max. forward current
 at case temperature

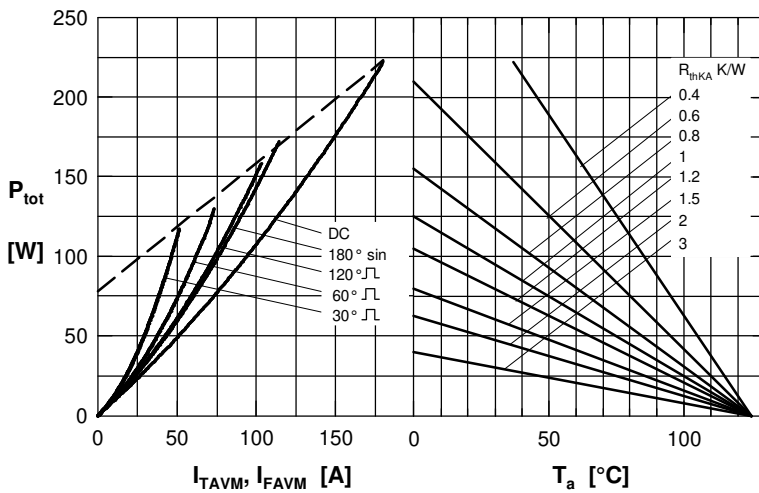


Fig. 4 Power dissipation vs. on-state current & ambient temperature
 (per thyristor or diode)



Fig. 5 Gate trigger characteristics



Fig. 6 Three phase rectifier bridge: Power dissipation vs. direct
 output current and ambient temperature



Fig. 7 Gate controlled delay time

Rectifier


Fig. 8 Three phase AC-controller: Power dissipation versus RMS output current and ambient temperature



Fig. 9 Transient thermal impedance junction to case (per thyristor/diode)

$R_{\theta JC}$ for various conduction angles d:

d	$R_{\theta JC}$ [K/W]
DC	0.22
180°	0.23
120°	0.25
60°	0.27
30°	0.28

Constants for Z_{thJC} calculation:

i	$R_{\theta i}$ [K/W]	t_i [s]
1	0.0066	0.0019
2	0.0678	0.0477
3	0.1456	0.3440



Fig. 10 Transient thermal impedance junction to heatsink (per thyristor/diode)

$R_{\theta JK}$ for various conduction angles d:

d	$R_{\theta JK}$ [K/W]
DC	0.42
180°	0.43
120°	0.45
60°	0.47
30°	0.48

Constants for Z_{thJK} calculation:

i	$R_{\theta i}$ [K/W]	t_i [s]
1	0.0066	0.0019
2	0.0678	0.0477
3	0.1456	0.3440
4	0.2000	1.3200