MALLORY Mallory Sonalert Products, Inc. Part #: JR16-R-4MCT115 Sales Outline Drawing Revision: A


Spec	cificat	tions:
------	---------	--------

Sound Level Category	Medium	
Mode of Operation	Continuous for 15 Seconds, then 0.1s beep @ 1 PPS until reset.	
Voltage Rating	9 to 16 VDC	
Frequency	3900 ± 500 Hz	
Loudness @ 1M	70 to 75 dB(A) Typ.	
Sound Current Draw	40mA MAX	
LED Color	RED	
LED Current Draw	60mA MAX	
Total Max Current Draw	100mA MAX	
Housing Material	6/6 Nylon, Color: Black	
Top Cap Material	6/6 Nylon, Color: Opaque White	
Storage Temperature	-40° to +70° C	
Operating Temperature	-30° to +60° C	
Mounting	Recommended hole size is 22.5 mm.	
Knurled Nut	The max recommended torque is 10 in-lbs.	
Cable	Gray, UL Style 21894, 300V, 105°C, 24AWG, Pb-Free Tinned Leads	
Weight (Typical)	105 grams	
NEMA 12	Approved with use of included gasket.	
Options	Please contact factory.	

Dimensions: Inches (mm)

cUL Recognized

ROHS Compliant

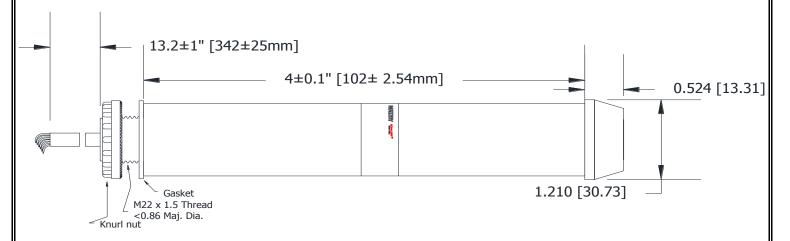

Connections:

SOUND BLACK wire to Ground and ORANGE wire to Positive TOP BROWN wire to Ground and RED wire to Positive

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert: JR16-R-4MCT115