

	E502650
---	----------------

Features


- Glass Passivated Chip Junction
- High Surge Current Capability
- Lead Free Finish/RoHS Compliant (Note 1)("P" Suffix Designates RoHS Compliant. See Ordering Information)
- Epoxy Meets UL 94 V-0 Flammability Rating
- General Purpose 3 Phases Bridge Rectifier Applications

50 Amp Three Phase Bridge Rectifiers 400 to 1600 Volts

Maximum Ratings @ 25°C (Unless Otherwise Specified)

Parameter	Symbol	Value							Unit
		MT5004A	MT5006A	MT5008A	MT5010A	MT5012A	MT5014A	MT5016A	
Peak Repetitive Reverse Voltage	V_{RRM}								V
Working Peak Reverse Voltage	V_{RWM}	400	600	800	1000	1200	1400	1600	
DC Blocking Voltage	V_R								
RMS Reverse Voltage	V_{RMS}	280	420	560	700	840	980	1120	V
Average Rectified Forward Current @ $T_C=55^\circ C$	$I_{F(AV)}$	50							A
Non-Repetitive Peak Surge Current @ 8.3ms Half Sine Wave	I_{FSM}	500							A
I^2t Rating for Fusing @ $1ms \leq t \leq 8.3ms$	I^2t	1042							A ² s
Dielectric strength @ Terminals to Case, AC 1 Minute	V_{dis}	2.5							KV

MT-35A


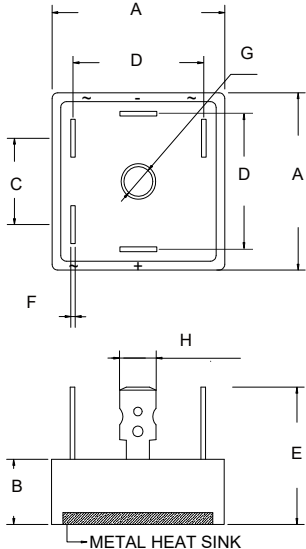


DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.110	1.134	28.20	28.80	
B	0.354	0.394	9.00	10.00	
C	0.610	0.650	15.50	16.50	
D	0.917	0.957	23.30	24.30	
E	/	0.944	/	25.00	
F	0.029	0.033	0.75	0.85	
G	0.197	0.217	5.00	5.50	
H	0.244	0.251	6.20	6.40	

Marking code

Part Number	Marking Code
MT5004A	MT5004A
MT5006A	MT5006A
MT5008A	MT5008A
MT5010A	MT5010A
MT5012A	MT5012A
MT5014A	MT5014A
MT5016A	MT5016A

Internal Structure

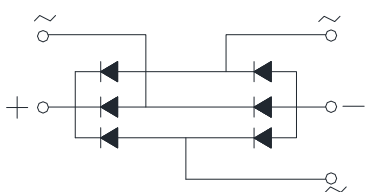Simplified Outline	Graphic Symbol
 <p>MCC XXXXXXXX ~ ~ YYWW + -</p> <p>XXXXXXX: Marking Code YYYYW: Date Code</p>	

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_J	Operating Junction Temperature Range		-55		150	°C
T_{stg}	Storage Temperature Range		-55		150	°C
$R_{th(J-C)}$	Thermal Resistance from Junction to Case	Note 1		0.88		°C/W

Note: 1. Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

Mechanical Data

Mounting Torque*: 1 N•m(Recommend), 2 N•m(Maximum).

*Use M5 Screw and Washer.

Electrical Characteristics @ 25°C Unless Otherwise Specified(Per Diode)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=25A; T_J=25^{\circ}C$			1.2	V
Reverse Current	I_R	at Rated $V_R; T_J=25^{\circ}C$			10	μA
Junction Capacitance	C_J	$V_R=4V; f=1MHz; T_J=25^{\circ}C$		188		pF

Curve Characteristics

Fig. 1 - Forward Current Derating Curve

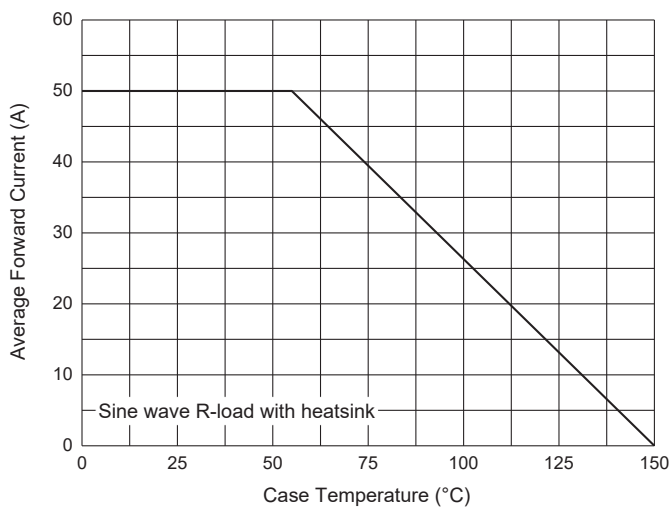


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current (Per Diode)

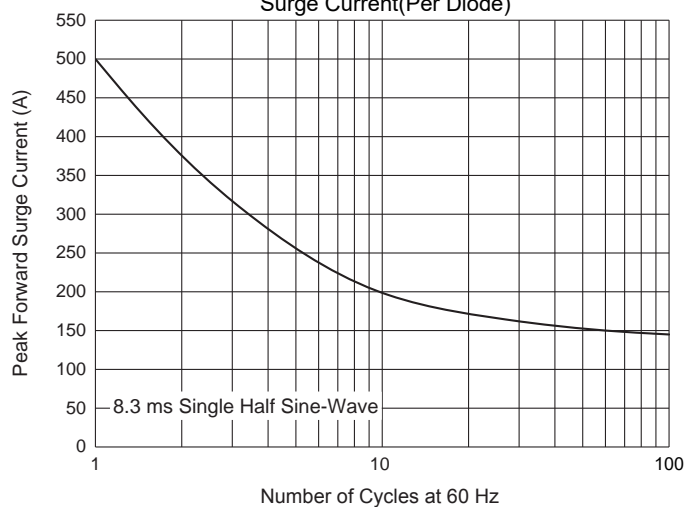


Fig. 3 - Typical Forward Characteristics (Per Diode)

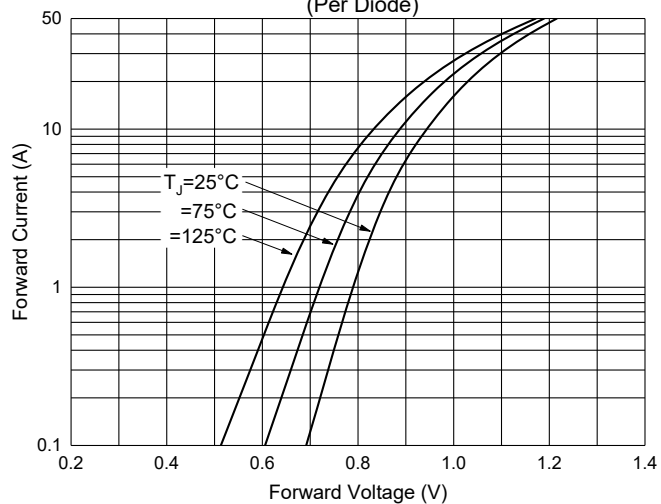


Fig. 4 - Typical Reverse Leakage Characteristics (Per Diode)


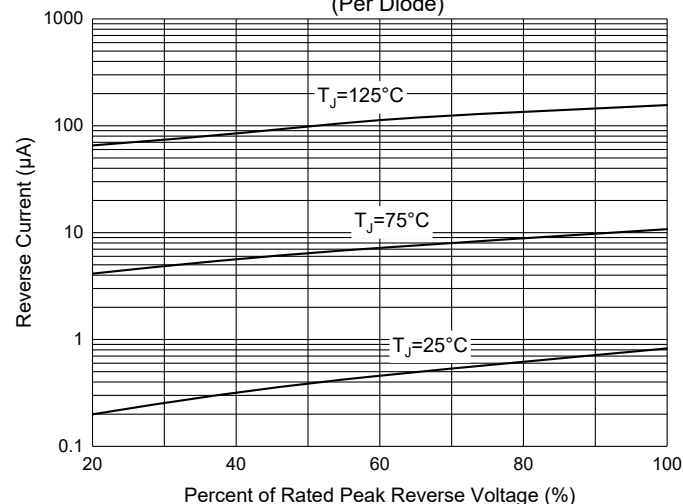


Fig. 5 - Typical Capacitance Characteristics (Per Diode)

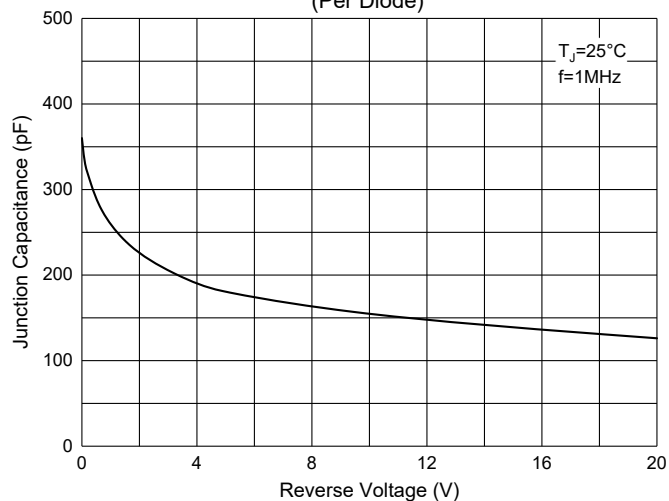

Ordering Information

Device	Packing
Part Number-BP	Bulk:50pcs/Box,400pcs/Carton

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp.* products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[MT5016A-BP](#) [MT5008A-BP](#)