


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022122154](#)
Status: **Active**
Overview: [KK Interconnect Solutions](#)
Description: KK 254 Solid Header, Right-Angle, with Friction Lock, 15 Circuits, 0.51µm Gold (Au) Plating

Documents:

[3D Model](#) [Packaging Specification PK-7478-001-000 \(PDF\)](#)
[3D Model \(PDF\)](#) [Symbol Footprint Data SYM-22-05-3151-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-10-07-001 \(PDF\)](#)

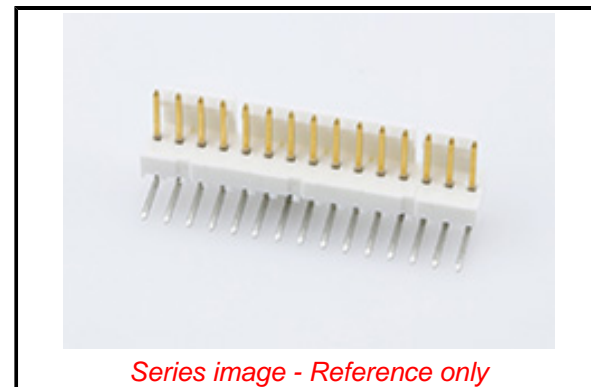

Series image - Reference only

Agency Certification

CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series [7478](#)
 Application Signal, Wire-to-Board
 Overview [KK Interconnect Solutions](#)
 Product Name KK 254
 UPC 800753592261

Physical

Breakaway No
 Circuits (Loaded) 15
 Circuits (maximum) 15
 Color - Resin Natural (White)
 Durability (mating cycles max) 50
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Gold
 Material - Plating Termination Gold
 Material - Resin Nylon
 Net Weight 1.975/g
 Number of Rows 1
 Orientation Right Angle
 PC Tail Length 3.58mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 2.54mm
 Pitch - Termination Interface 2.54mm
 Plating min - Mating 0.508µm
 Plating min - Termination 0.508µm
 Polarized to Mating Part Yes
 Polarized to PCB Yes
 Shrouded Partial
 Stackable Yes
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2021)4569-DC (8
 July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[7478 Series](#)

Mates With

[2695](#) , [6471](#) , [7880](#) , [4455](#) , [7720](#)

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	A-7478-15A241
--------------------	---------------

Reference - Drawing Numbers

Packaging Specification	PK-7478-001-000
Product Specification	PS-10-07-001
Sales Drawing	SDA-7478-000
Symbol/Footprint Data	SYM-22-05-3151-001

This document was generated on 12/20/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[22-12-2154](#)