

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0367570144](#)  
**Status:** **Active**  
**Overview:** [MLX Power Connectors](#)  
**Description:** 6.35mm Pitch MLX Power Connector Header with Socket Terminal, Vertical, 6 Circuits, Nylon 6/6 94V-2, Tin (Sn) Plating, Natural, Lead-Free, Glow-Wire Capable with CTI of 325V

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-43255-001-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-43255-003-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PSX-42002-0001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR19980
UL	E29179


**General**

Product Family	PCB Headers
Series	<a href="#">36757</a>
Application	Power, Wire-to-Board
Comments	<p>""""""Glow Wire compatible with CTI of 325V&lt;P&gt;&lt;P&gt;This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. &lt;P&gt;&lt;P&gt; The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). &lt;P&gt; If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""</p>

Overview	<a href="#">MLX Power Connectors</a>
Product Name	MLX
UPC	884982218376

**Physical**

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Capable	Yes
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes

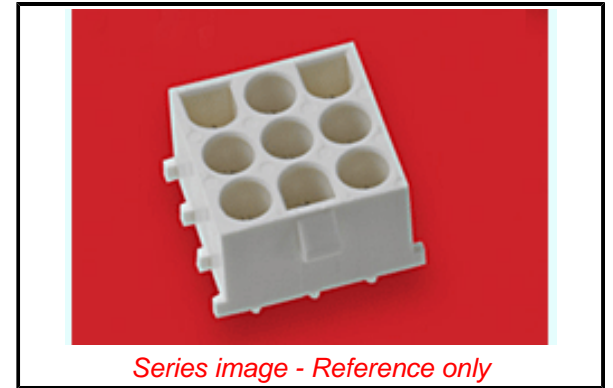

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[36757 Series](#)

**Mates With**

[42021 Plug](#)

Material - Plating Mating	Tin
Material - Resin	Nylon
Net Weight	3.850/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	4.27mm
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	6.35mm
Polarized to PCB	Yes
Shrouded	Fully
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	13.5A, 20.0A
Voltage - Maximum	600V

**Solder Process Data**

Lead-freeProcess Capability	WAVE
-----------------------------	------

**Material Info****Reference - Drawing Numbers**

Packaging Specification	PK-43255-001-001, PK-43255-003-001
Product Specification	PSX-42002-0001-001
Sales Drawing	SD-36757-0002-001

This document was generated on 09/27/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[36757-0144](#)