

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0151350602](#)  
**Status:** **Active**  
**Overview:** CLIK-Mate Wire-to-Board Connectors  
**Description:** CLIK-Mate-to-CLIK-Mate Off-the-Shelf (OTS) Cable Assembly, Single Row, 150.00mm Length, 6 Circuits, Beige

**Documents:**

[Drawing \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                        |  |
|------------------------|--|
| Product Family         | Cable Assemblies                                   |
| Series                 | <a href="#">15135</a>                              |
| Application            | Signal, Wire-to-Board                              |
| Assembly Configuration | Dual Ended Connectors                              |
| Connector to Connector | CLIK-Mate-to-CLIK-Mate                             |
| Overmolded             | No   |
| Overview               | <a href="#">CLIK-Mate Wire-to-Board Connectors</a> |
| Product Name           | CLIK-Mate  |
| Type                   | Discrete Wire Assembly                             |
| UPC                    | 191128160322                                       |

**Physical**

|                                |                      |
|--------------------------------|----------------------|
| Cable Length                   | 150.00mm             |
| Circuits (Loaded)              | 6                    |
| Color - Resin                  | Beige                |
| Gender                         | Male-Male            |
| Lock to Mating Part            | Yes                  |
| Material - Metal               | Copper Alloy         |
| Material - Plating Mating      | Tin                  |
| Material - Plating Termination | Tin                  |
| Material - Resin               | PBT                  |
| Net Weight                     | 3.827/g              |
| Number of Rows                 | 1                    |
| Packaging Type                 | Bag                  |
| Pitch - Mating Interface       | 1.50mm               |
| Plating min - Mating           | 0.406µm              |
| Plating min - Termination      | 0.406µm              |
| Single Ended                   | No                   |
| Termination Interface: Style   | Crimp or Compression |
| Wire Insulation Diameter       | 1.10mm               |
| Wire Size AWG                  | 24                   |
| Wire/Cable Type                | UL 1061              |


**Electrical**

|                               |                  |
|-------------------------------|------------------|
| Current - Maximum per Contact | 2.0A             |
| Voltage - Maximum             | 100V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|               |                |
|---------------|----------------|
| Sales Drawing | 2012341677-000 |
|---------------|----------------|

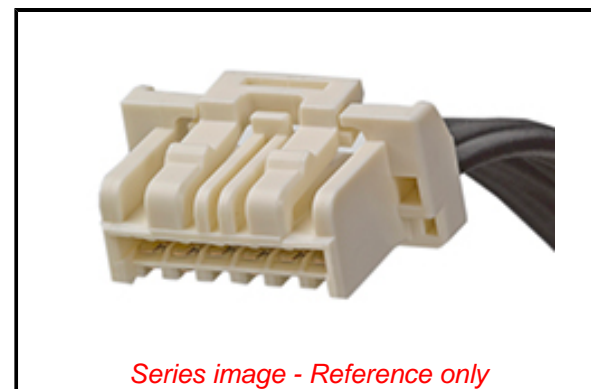

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[15135 Series](#)

**Mates With**

Bottom-Entry Receptacle [503395](#) . Right Angle, Through Hole Receptacle [503175](#) . Right Angle, Surface Mount Receptacle [502585](#) . Vertical, Through Hole Receptacle [503159](#) . Vertical, Surface Mount Receptacle [502584](#)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[15135-0602](#)