

KEY

CONNECTOR 2

CONNECTOR 1

- CONNECTOR 1 : 858-004-103RSS4, MOLDED STRAIGHT HOOD, COLOR BLACK
- 2. CONNECTOR 2: 858-004-103RSS4, MOLDED STRAIGHT HOOD, COLOR BLACK
- 3. WIRE: 24AWG, 4 TWISTED PAIRS, UL2835, FOIL SHIELD, COLOR BLACK, 30V

- LENGTH = YY -

- 4. CABLE DIAMETER: 6,50mm±0,19
- 5. PIN ΠUT :

WIRING SCHEMATIC

CCA-000-MYYR194 01 = 1 MFTFR02 = 2 MFTFRS03 = 3 METERS

**SEE PAGE 3 FOR CABLE SPECIFICATIONS

RoHS COMPL

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF

DRAWN: DATE: M. SIGMON 04-22-15


NorComp

SCALE: SHEET NTS

DWG NO.

CCA-000-MYYR194

REV

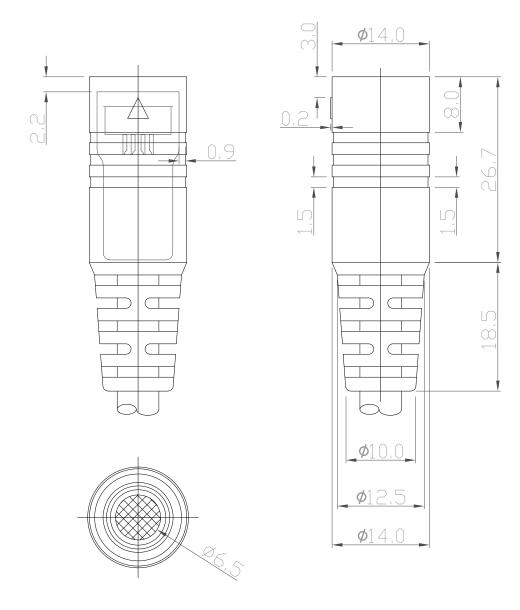

ROHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: DATE: 04-22-15

NorComp

 SCALE:
 SHEET
 OF
 REV

 NTS
 2
 3
 4

CCA-000-MYYR194


ELECTRICAL CHARACTERISTICS

VOLTAGE RATING: 30V TEMPERATURE RATING: 60°C

SPARK TEST: AC-2000V/0.15 sec MIN.
DIELECTRIC STRENGTH: AC-750V/1 sec MIN.

INSULATION RESISTANCE: PE: DC-500V 15000 MOHM/100M MIN. AT 20°C

CONDUCTOR RESISTANCE: 24AWG - 93.2 DHM/KM MAX. AT 20°C

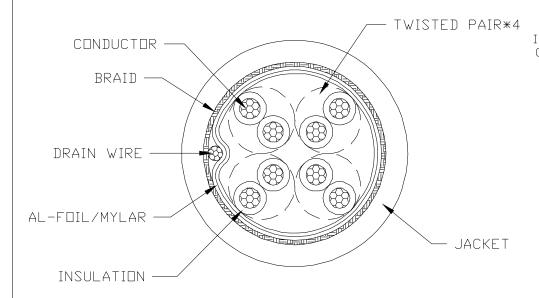

4 1 3 2

COLOR CODE

- 1. BROWN * BROWN/WHITE
- 2. BLUE * BLUE/WHITE
- 3. DRANGE * DRANGE/WHITE
- 4. GREEN * GREEN/WHITE

ROHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: DATE: 04-22-15

NorComp

SCALE: NTS	SHEET	3	OF	3	REV 4
DWG NO.	004	^^		1) () (D 4 O 4	

CCA-000-MYYR194

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

CCA-000-M01R194