

Description

With output frequencies in the range of 9.5MHz to 52MHz, the Abracon AVTX-14 series is offered in a small compact package, perfect for reducing board space. The series comes with several supply voltage range options spanning from 1.8 V, 2.5 V, 2.8V, 3.0 V, and 3.3 V. In addition, the AVTX-14 provides a clipped sinewave output that can maintain a frequency stability of ± 0.5 ppm at $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.



Features

- Output waveform clipped sinewave
- Hermetically seam-sealed ceramic package
- Low current consumption
- [REACH/RoHS II Compliant](#) | [MSL Level 1](#)
- [ESD Sensitive](#)

Typical Applications

- Wireless communication
- Test and measurement equipment
- Industrial control and automation
- GPS receivers

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	9.5		52	MHz	
Standard Frequencies	10, 32, 40, 52			MHz	
Operating Temperature	-40		+85	$^{\circ}\text{C}$	See options (Table 1)
Storage Temperature	-40		+85	$^{\circ}\text{C}$	
Frequency Stability $\Delta f/f_0$ vs:					
Tolerance	-1.0		+1.0	ppm	Reference to f_0 , at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Pre-reflow
Tolerance	-2.0		+2.0		Reference to f_0 , at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 24 hours after reflow, two times
Temperature	-2.5		+2.5		See Options (Table 1)
Supply Voltage Change	-0.2		+0.2		Reference to f_0 , at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$
Load Change	-0.2		+0.2		$V_{dd} \pm 5\%$
Aging	-1.0		+1.0		$CL \pm 1\text{k}\Omega / \pm 1\text{pF}$
Supply Voltage (V_{dd})	+3.135	+3.3	+3.465	V	First year @ $+25^{\circ}\text{C} \pm 2^{\circ}\text{C}$
	+2.85	+3.0	+3.15		Option E
	+2.66	+2.8	+2.94		Option A
	+2.375	+2.5	+2.625		Option B
	+1.71	+1.8	+1.89		Option C
Supply Current (I_{dd})			2.0	mA	Option D
			2.5		9.50MHz to 26.00 MHz
Start-up Time			2.0	ms	26.01MHz to 52.00 MHz
Output Voltage	0.8			Vp-p	
Output Load	9	10	11	k Ω	
	9	10	11	pF	
Output Waveform	Clipped Sine Wave, External DC-Cut Capacitor Required				1000 pF recommended
Voltage Control Function (V_{con})	0.4	1.4	2.4	Vdc	$V_{dd} = 3.3 \text{ Vdc}$
	0.4	1.4	2.4	Vdc	$V_{dd} = 3.0 \text{ Vdc}$
	0.4	1.4	2.4	Vdc	$V_{dd} = 2.8 \text{ Vdc}$
	0.4	1.4	2.4	Vdc	$V_{dd} = 2.5 \text{ Vdc}$
	0.0	0.9	1.8	Vdc	$V_{dd} = 1.8 \text{ Vdc}$


Electrical Specifications Continued

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Tuning Range			-5.0	ppm	At Vcon(min), V _{DD} =1.8Vdc
	5.0			ppm	At Vcon(max), V _{DD} =1.8Vdc
			-15.0	ppm	At Vcon(min), V _{DD} >1.8Vdc
	15.0			ppm	At Vcon(max), V _{DD} >1.8Vdc
Frequency Tuning Transition	Positive Transfer Characteristics				
Phase Noise (@ 10 MHz Carrier, @ 25°C ±2°C)					
@10Hz offset		-95	-92	dBc/Hz	Applicable to all standard available frequencies with Vdd = +1.8V, +2.5, +2.8, +3.0V, +3.3V
@100Hz offset		-120	-117		
@1kHz offset		-138	-134		
@10kHz offset		-149	-146		
@100kHz offset		-158	-155		
@1MHz offset		-159	-156		
@5MHz offset		-159	-156		
Phase Noise (@ 52 MHz Carrier, @ 25°C ±2°C)					
@10Hz offset		-79	-73	dBc/Hz	Applicable to all standard available frequencies with Vdd = +1.8V, +2.5, +2.8, +3.0V, +3.3V
@100Hz offset		-106	-101		
@1kHz offset		-132	-128		
@10kHz offset		-149	-146		
@100kHz offset		-156	-153		
@1MHz offset		-157	-154		
@10MHz offset		-157	-154		
@20MHz offset		-158	-155		


Note 1:

All measurements made at 25°C± 2°C, nominal Vdd, nominal Vcon, unless otherwise specified.


Part Identification

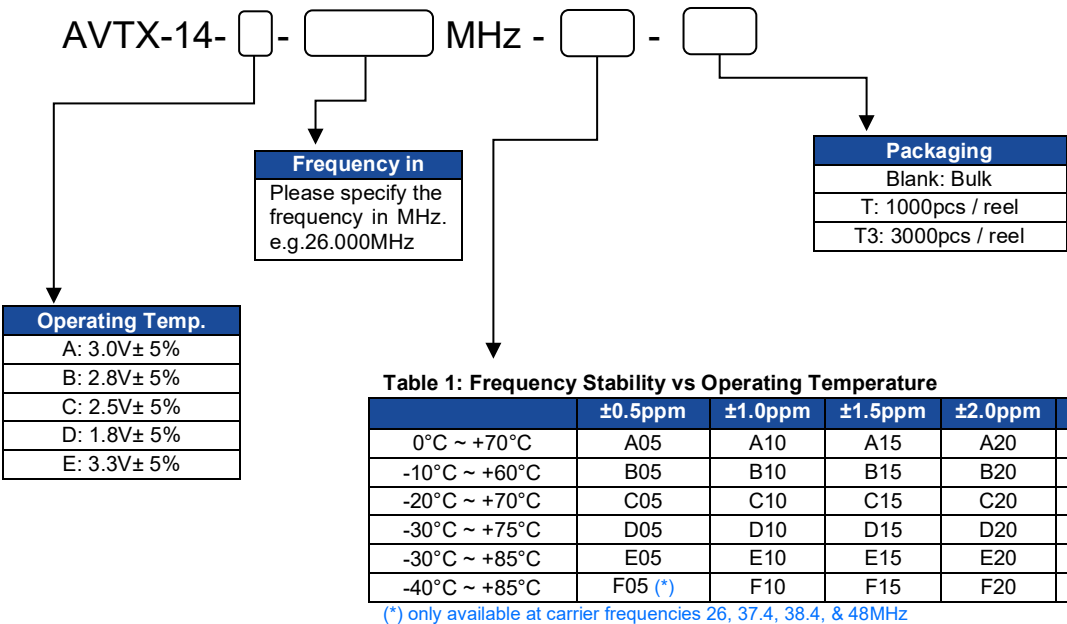


Recommended Test Circuit

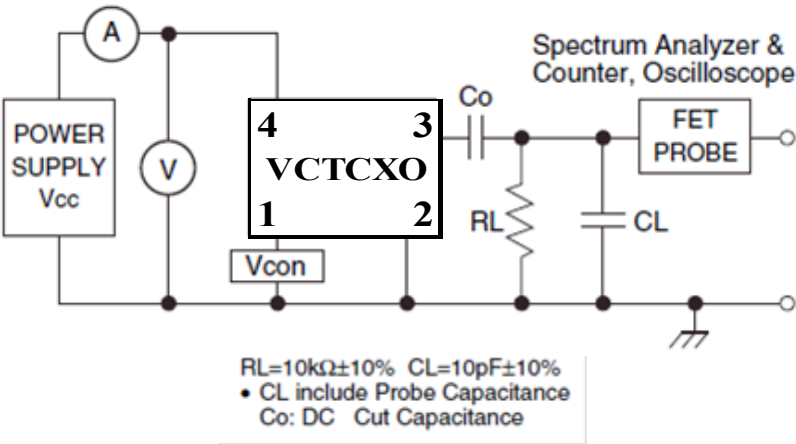

Mechanical Dimensions

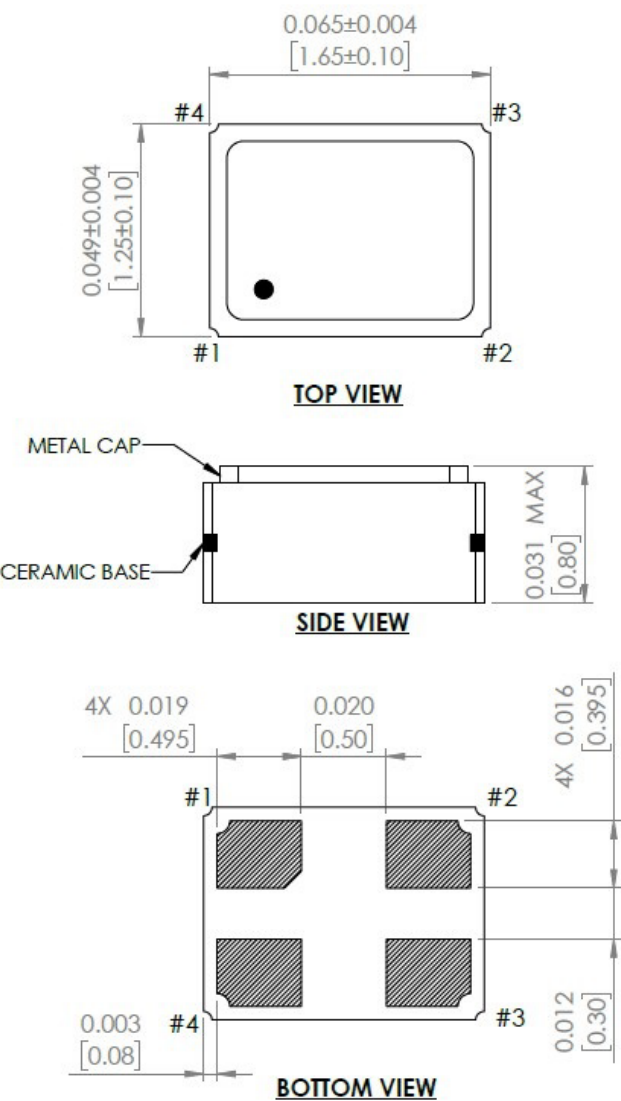

Recommended Land Pattern

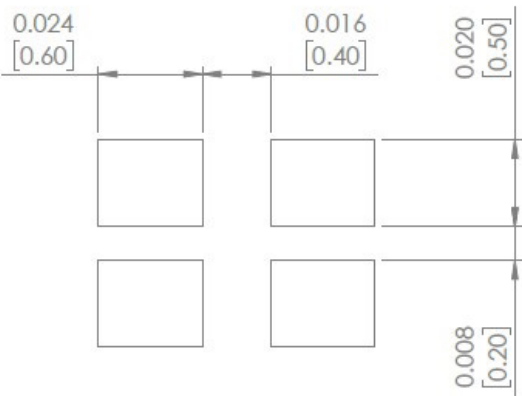

Pin #	Function
1	Vcon
2	GND
3	Output
4	Vdd

Dimensions: inches (mm)

Reflow Profile [JEDEC J-STD-020]

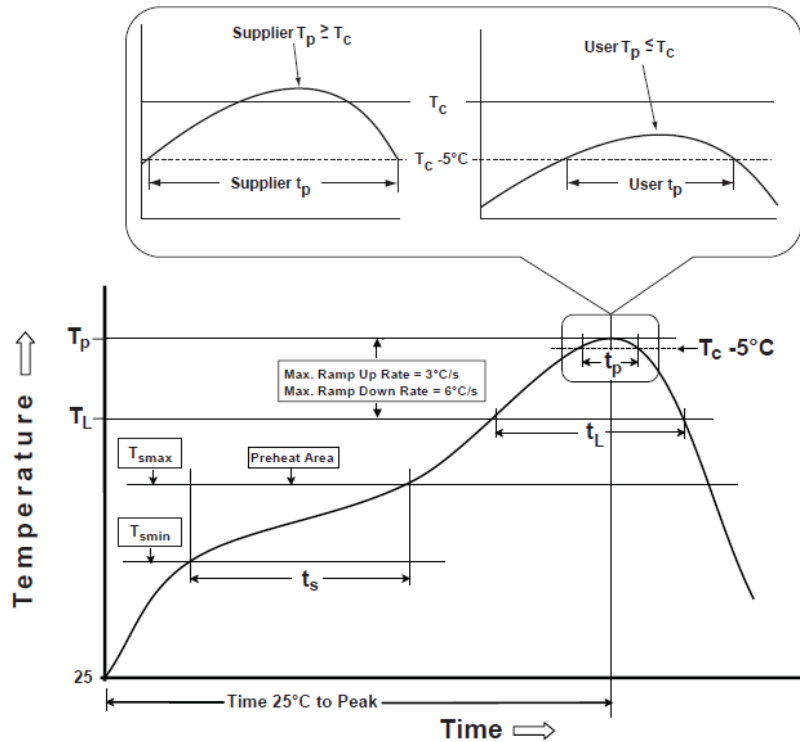


Table 1

**SnPb Eutectic Process
Classification Temperatures (T_c)**

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

**Pb-Free Process
Classification Temperatures (T_c)**

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C


Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T _{ssmin})	100°C	150°C
Temperature maximum (T _{smax})	150°C	200°C
Time (T _{ssmin} to T _{smax}) (t _s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T _{smax} to T _p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T _L)	183°C	217°C
Time at liquidous (t _L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T _p)*	see Table 1	see Table 2
Time (t _p)** within 5°C of the specified classification temperature (T _c)	20 sec.	30 sec.
Ramp-down rate (T _p to T _{ssmin})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

Packaging


T: 1,000pcs/reel
T3: 3,000pcs/reel

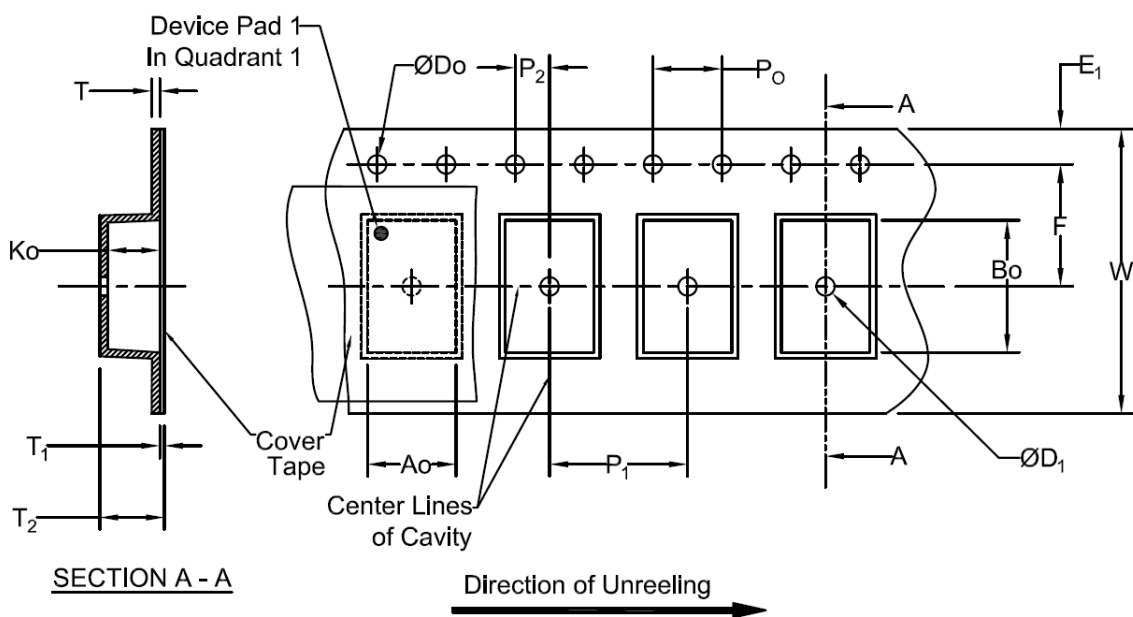

Tape Specifications (mm)							
Width	Ao	Bo	Do	D1 (Min)	E1	F	Ko
8mm	*	*	1.5+0.1/-0.0	1.0	1.75±0.1	3.5±0.05	*
Width	P1	P2	Po	T (Max)	T1 (Max)	T2 (Max)	W (Max)
8mm	4.0±0.1	2.0±0.05	4.0±0.1	0.6	0.1	2.5	8.3

*Note: Compliant to EIA-481

Dimensions: mm

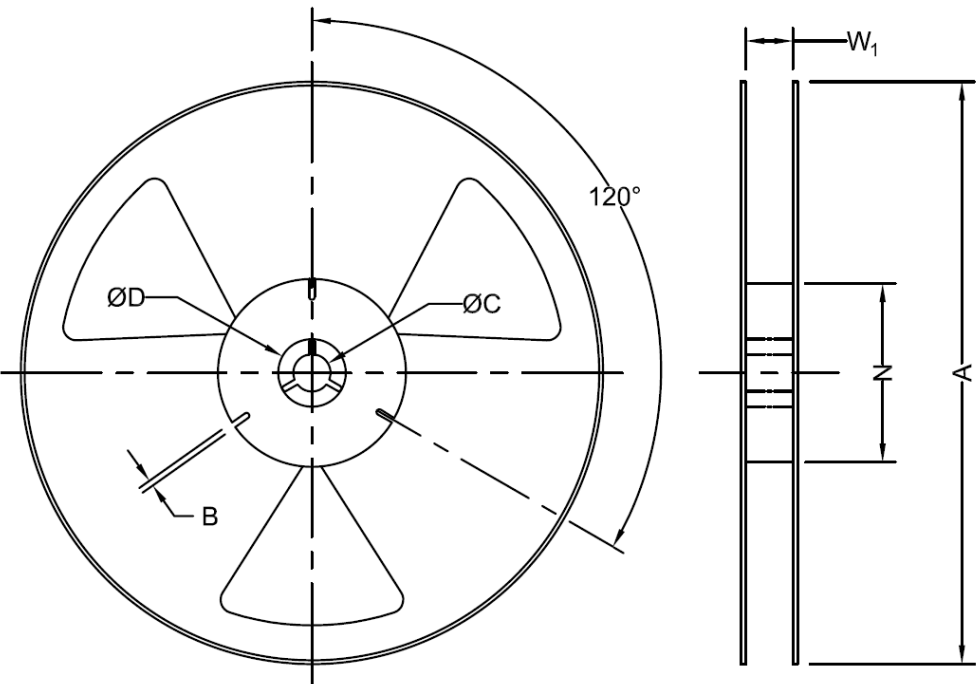

Reel Specifications (mm)							
Width	Qty/Reel	A (Nom)	B (Min)	C (Min)	D (Min)	N (Min)	*W ₁
8mm	1000	178	1.5	13.0+0.5/-0.2	20.2	50	8.4+1.5/-0.0
	3000	178	1.5	13.0+0.5/-0.2	20.2	50	8.4+1.5/-0.0

*Note: Measured at Hub

Dimensions: mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[AVTX-14-E-38.400MHZ-F05-T](#) [AVTX-14-E-26.000MHZ-F05-T](#) [AVTX-14-E-48.000MHZ-F05-T](#)