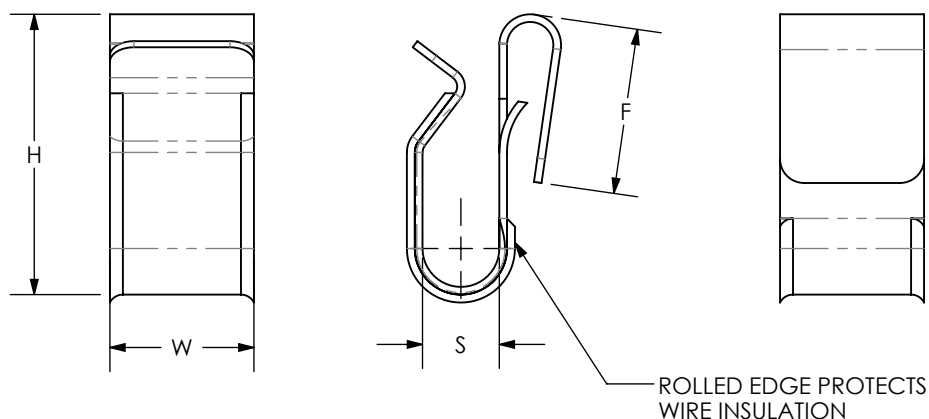



PART NUMBER	PANEL THICKNESS	WIRE DIAMETER	RECOMMENDED FOR USE WITH 1000V SOLAR WIRES	DIMENSIONS - IN [mm]			
				F	H	S	W
MEC100-PV-C	.051-.098" [1.3-2.5mm]	.161-.240" [4.1-6.1mm]	1 OR 2 12 GAUGE, USE-2 WIRES	.44 [11.2]	.73 [18.5]	.20 [5.1]	.38 [9.7]
MEC100-2PV-C	.051-.098" [1.3-2.5mm]	.200-.300" [5.1-7.6mm]	1 OR 2 10 GAUGE, PV WIRES	.44 [11.2]	.73 [18.5]	.28 [7.1]	.38 [9.7]

**NOTES:**

1. UL LISTED TO US AND CANADIAN REQUIREMENTS UNDER FILE E136577
2. MATERIAL: .02" [.5] THICK 410 STAINLESS STEEL
3. CABLE ORIENTATION IS PARALLEL TO PANEL EDGE
4. NO INSTALLATION TOOLS REQUIRED
5. PACKAGING QTY: C = 100

							TITLE SOLAR METAL EDGE CLIP (MEC100-PV-C, MEC100-2PV-C) CUSTOMER DRAWING			
							ITEM REVISION NAME	00494EBK/00		
							DATASET FILE NAME	00494EBK-DC/00.SLDDRW		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL
							.X ±	.XXX ±	SEE NOTES	
							.XX ± .04 [1.0]	ANGLES ±		
							THIRD ANGLE PROJECTION			DRAWING NUMBER
							DRAWN BY JHNU			00494EBK-DC
							DATE	11/19	CHK	SIZE
								TMR	N/A	A
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SHEET 1 OF 1			
01	12/19	JHNU	TMR	RGB	REVISED UPPER LIMIT ON WIRE DIAMETER RANGE	056434				
00	11/19	JHNU	TMR	RGB	DRAWING RELEASED	056434				

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MEC100-2PV-C](#) [MEC100-PV-C](#)