

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, coding: S, cable length: 2 m, for AC current up to 12 A/690 V

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: AC connectors for up to 12 A and 690 V AC
- ✓ Protection against incorrect connection using special S-coding
- ✓ Our standard: robust halogen-free PUR cable

Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4046356839891 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 (without preloading, as additional test in accordance with IEC 60529) |

General

| | |
|-----------------------|----------|
| Rated current at 40°C | 12 A |
| Rated voltage | 690 V AC |
| Number of positions | 4 |
| Color handle area | black |
| Insulation resistance | ≥ 100 MΩ |

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Technical data

General

| | |
|------------------------------|-------------------------------|
| Coding | S power |
| Standards/regulations | M12 connector IEC 61076-2-111 |
| Status display | No |
| Protective circuit/component | unwired |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | > 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material of grip body | PP |
| Material, knurls | Zinc die-cast, nickel-plated |

Standards and Regulations

| | |
|--|-------------------------------|
| Standards/specifications | M12 connector IEC 61076-2-111 |
| Flammability rating according to UL 94 | V0 |

Cable

| | |
|---|---|
| Cable type | PUR halogen-free black |
| Cable type (abbreviation) | PUR |
| Cable abbreviation | Li9YV1-11Y |
| UL AWM style | 20234 / 10492 (80°C/1000 V) |
| Conductor cross section | 4x 1.5 mm ² |
| AWG power supply | 16 |
| Conductor structure, voltage supply | 78x 0.15 mm |
| Core diameter including insulation | 2.45 mm ±0.05 mm |
| Thickness, insulation | ≥ 0.36 mm |
| Wire colors | Black 1, black 2, black 3, green/yellow |
| Overall twist | 4 wires, twisted |
| Length of twist, overall twist | 93 mm |
| External sheath, color | black-gray RAL 7021 |
| Outer sheath thickness | approx. 1.3 mm |
| External cable diameter D | 8.8 mm ±0.25 mm |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 10 x D |
| Number of bending cycles | 2000000 |
| Minimum bending radius, drag chain applications | 10 x D |
| Traversing path | 10 m |

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Technical data

Cable

| | |
|---------------------------------|---|
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Cable weight | 114 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | PP |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 1 GΩ*km (at 20 °C) |
| Conductor resistance | ≤ 13 Ω/km (at 20 °C) |
| Nominal voltage, cable | ≤ 1000 V AC |
| Test voltage, cable | ≥ 10000 V AC (Spark test) |
| Flame resistance | According to UL 758/1581 (Cable Flame) |
| | according to UL 758/1581 FT1 |
| | According to DIN EN 60332-1-2 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | in accordance with DIN EN 50267-2-1 |
| Resistance to oil | According to DIN EN 60811-2-1, 168 h at 100°C |
| | According to UL 758, 168 h at 60°C |
| Other resistance | Hydrolysis and microbe resistant as per VDE 0282 section 10 |
| | Low adhesion |
| | abrasion-resistant |
| | Resistant to salt water |
| Ambient temperature (operation) | -50 °C ... 80 °C (cable, fixed installation) |
| | -30 °C ... 80 °C (cable, flexible installation) |


Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844


Schematic diagram

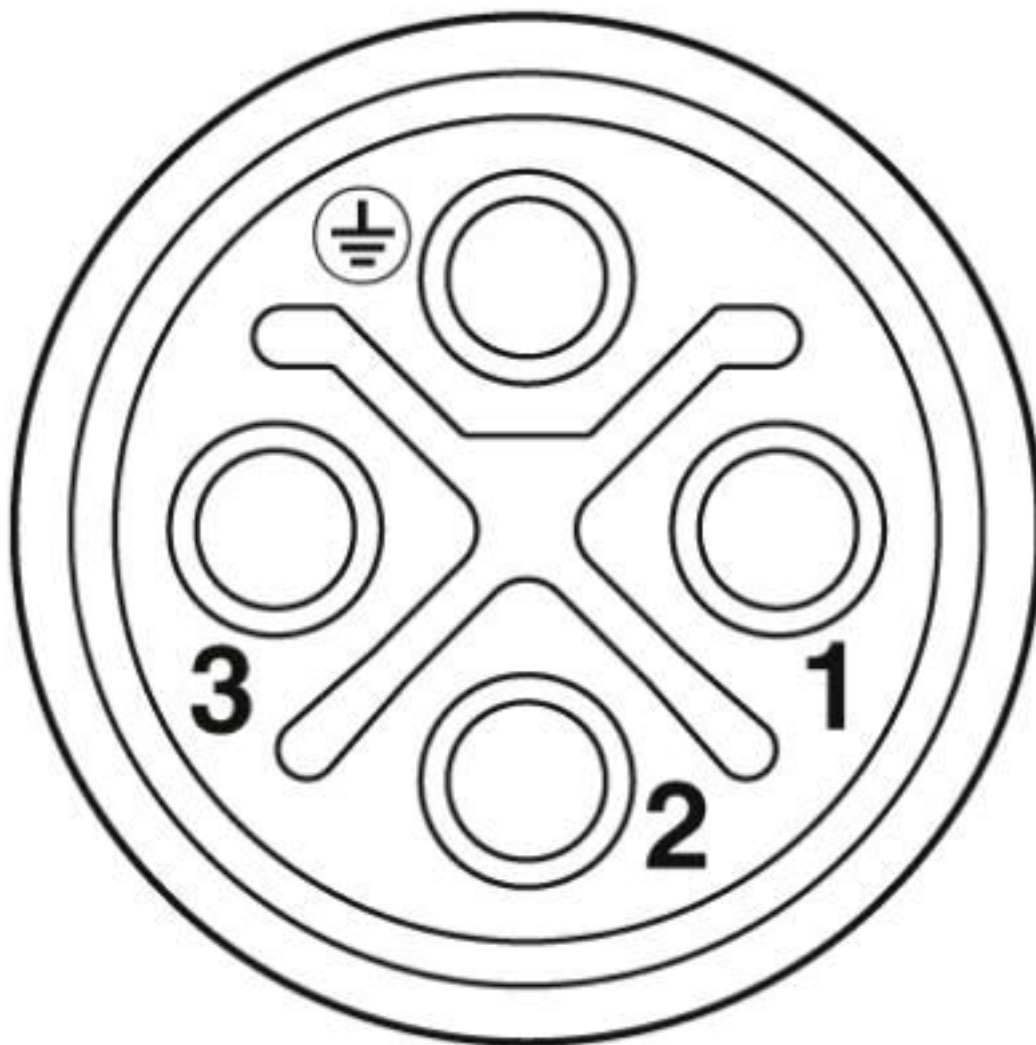

Pin assignment of M12 socket, 4-pos., S-coded, socket side view


Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Diagram

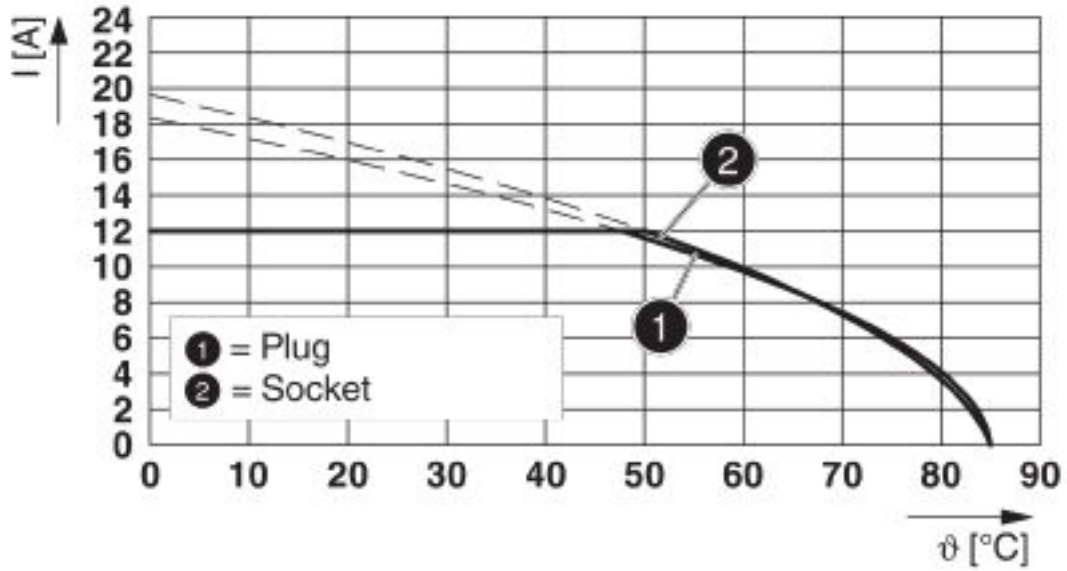

Current carrying capacity


Dimensional drawing

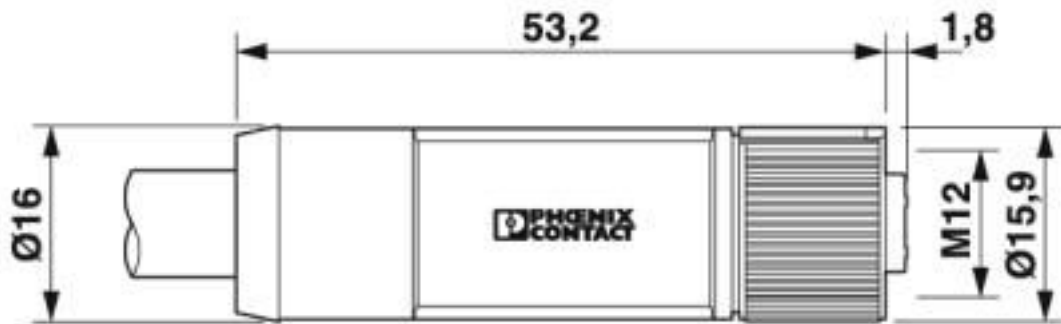

M12 x 1 socket, straight

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844


Circuit diagram

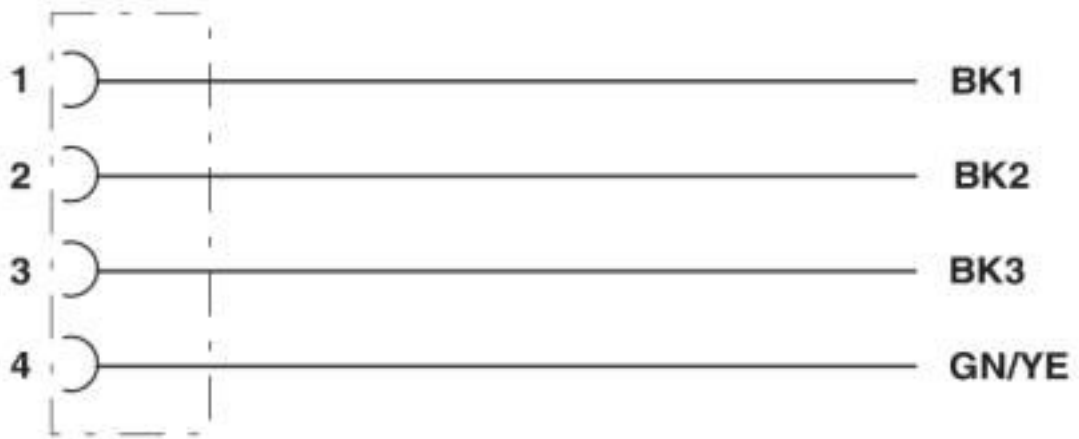

Contact assignment of the M12 socket

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Cable cross section

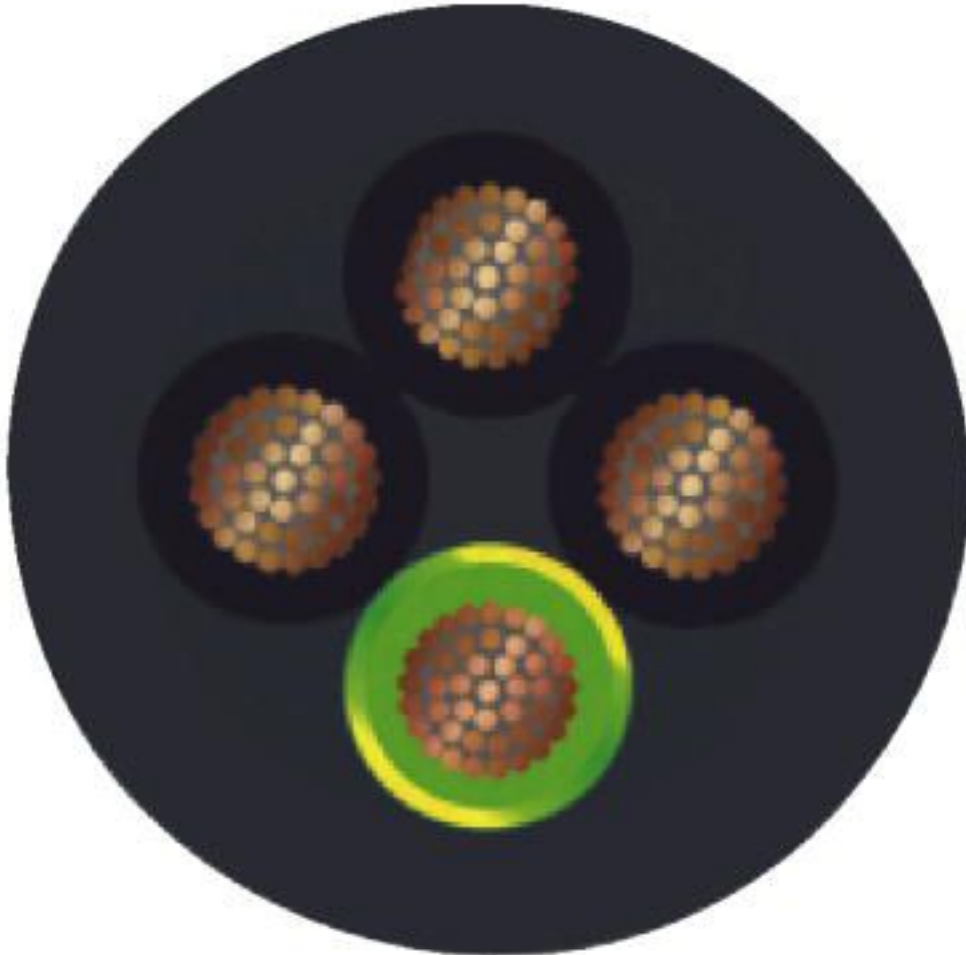

PUR halogen-free black [PUR]

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27060311 |
| eCl@ss 4.0 | 27140800 |
| eCl@ss 4.1 | 27140800 |
| eCl@ss 5.0 | 27143400 |
| eCl@ss 5.1 | 27143400 |
| eCl@ss 6.0 | 27279200 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |
| ETIM 7.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |
| UNSPSC 19.0 | 31251501 |
| UNSPSC 20.0 | 31251501 |
| UNSPSC 21.0 | 31251501 |

Approvals


Approvals


Approvals

UL Listed / cUL Listed / EAC-RoHS / EAC / cULus Listed

Ex Approvals

Approval details

| | | | |
|----------------------------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 468743 |
| Nominal voltage UN | 600 V | | |
| Nominal current IN | 12 A | | |
| mm ² /AWG/kcmil | 16 | | |

| | | | |
|--------------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 468743 |
| Nominal voltage UN | 600 V | | |

Power cable - SAC-4P- 2,0-PUR/M12FSS PE - 1408844

Approvals

| | |
|----------------------------|------|
| Nominal current IN | 12 A |
| mm ² /AWG/kcmil | 16 |

| | | |
|----------|--|--------------------------|
| EAC-RoHS | | RU D- DE.HB35.B.00387 |
|----------|--|--------------------------|

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.BL08.B.00286 |
|-----|--|--------------------------|

| | | |
|--------------|--|--|
| cULus Listed | | |
|--------------|--|--|

Accessories

Accessories

Screwdriver tools

Tool - SAC BIT M12-D16 - 1200305



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive

Screw plug - PROT M12 MS PWR - 1092802



An M12 screw plug for the unoccupied M12 females of the M12 POWER connectors, boxes, and flush-type connectors

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1408844](#)