



# PUI audio



Data Sheet	AS05808PO-WP
------------	--------------

The **AS05808PO-WP** is designed for applications that require robust low-frequency response and low THD in compact designs.


## Features:

- 88dB SPL: 1W dissipation, distance = 0.5m
- 6.0W continuous dissipation
- 450Hz free-air resonance
- 58mm x 35mm x 19.5mm dimensions


**Specifications** (Specifications measured with following conditions: ambient temperature;  $15^{\circ}\text{C} \leq T_A \leq 35^{\circ}\text{C}$ , relative humidity;  $25\% \leq \text{RH}_A \leq 75\%$ , according to standard GB/T9396-1996, unless otherwise stated. Judgement Condition: ambient temperature;  $20 \pm 2^{\circ}\text{C}$ ; relative humidity;  $63\% \leq \text{RH}_A \leq 67\%$ . Product shelf life valid for 12 months.

Parameters	Values	Units
Rated Input Power	6.0	Watts
Maximum Input Power	7.0	Watts
Impedance (f = 1.0 kHz)	$8 \pm 15\%$	Ohms
Sensitivity (SPL) $P_{\text{DRIVE}} = 1.0\text{W}$ , distance = 0.5m f = ave. 0.8kHz, 1.0kHz, 1.2kHz, 1.5kHz	$88 \pm 3$	dB
Resonant Frequency ( $f_0$ )	$450 \pm 20\%$	Hz
Frequency Range (-10 dB)	$250 \leq f \leq 20,000$	Hz
Total Harmonic Distortion (THD) f = 1kHz, $P_{\text{DRIVE}} = 1.0\text{W}$	$\leq 5$	%
Frame Material	Iron	-
Magnet Material	NdFeB	-
Diaphragm Material	NBR + PAPER	-
Weight	22.5	gm
Ingress Protection Rating	IPX4	-
Buzz, Rattle, etc.	Not audible with $P_{\text{DRIVE}} = 6.0\text{W}$ , sine wave	-
Polarity	Applying positive dc current to "+" terminal moves diaphragm forward	-
Operating Temperature Range	$-25 \leq T_O \leq 50$	$^{\circ}\text{C}$
Storage Temperature Range	$-45 \leq T_S \leq 85$	$^{\circ}\text{C}$
Environmental Compliance	RoHS/REACH	-


## Measurement Method (1W input power with microphone spaced at 50cm)

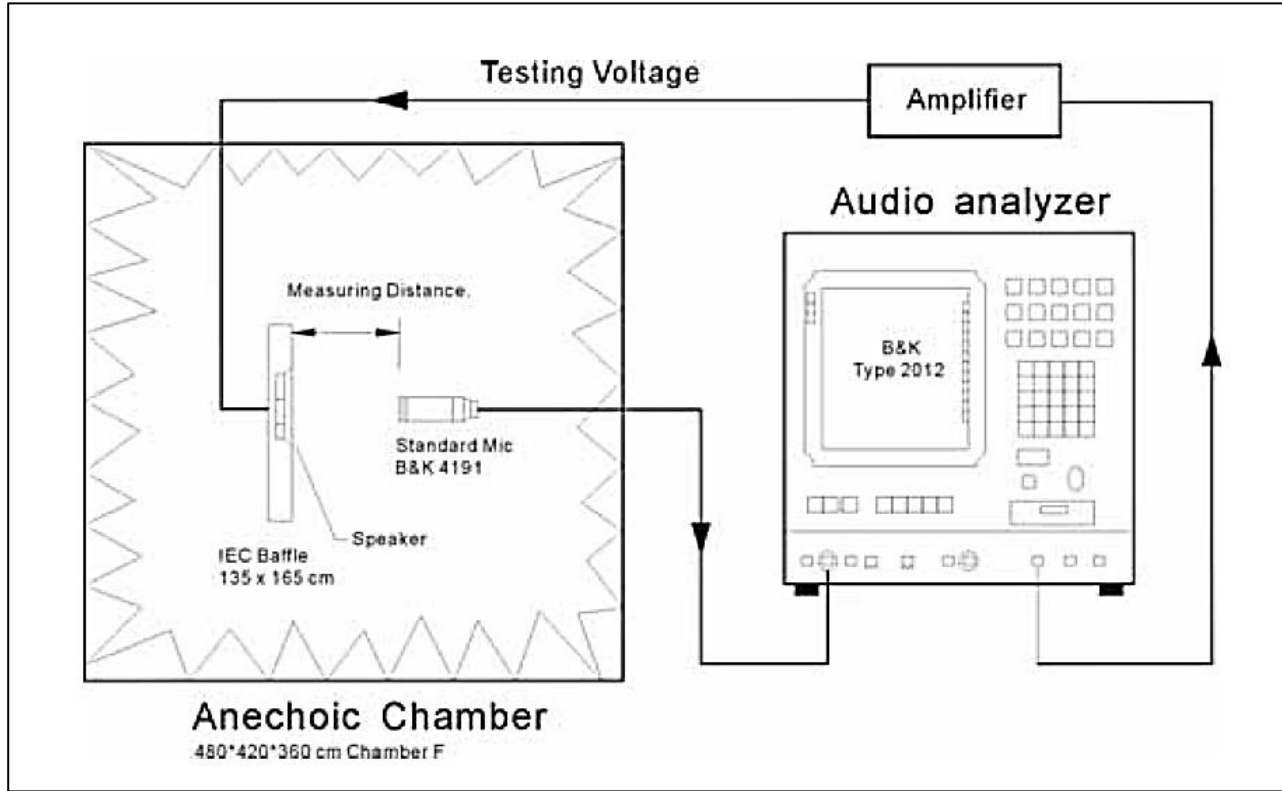


## Typical Frequency Response ( $P_{DRIVE} = 1W$ , distance = 50cm)

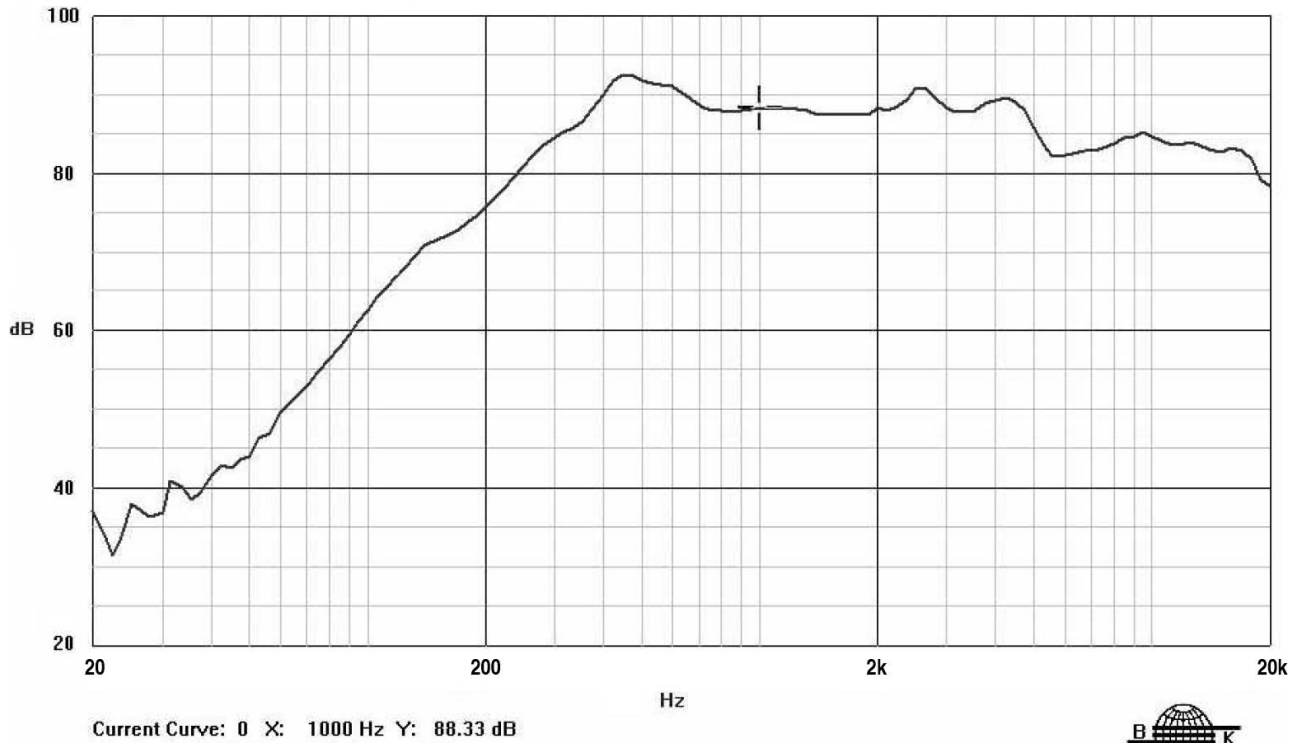

### Typical THD vs. Frequency ( $P_{DRIVE} = 1W$ )

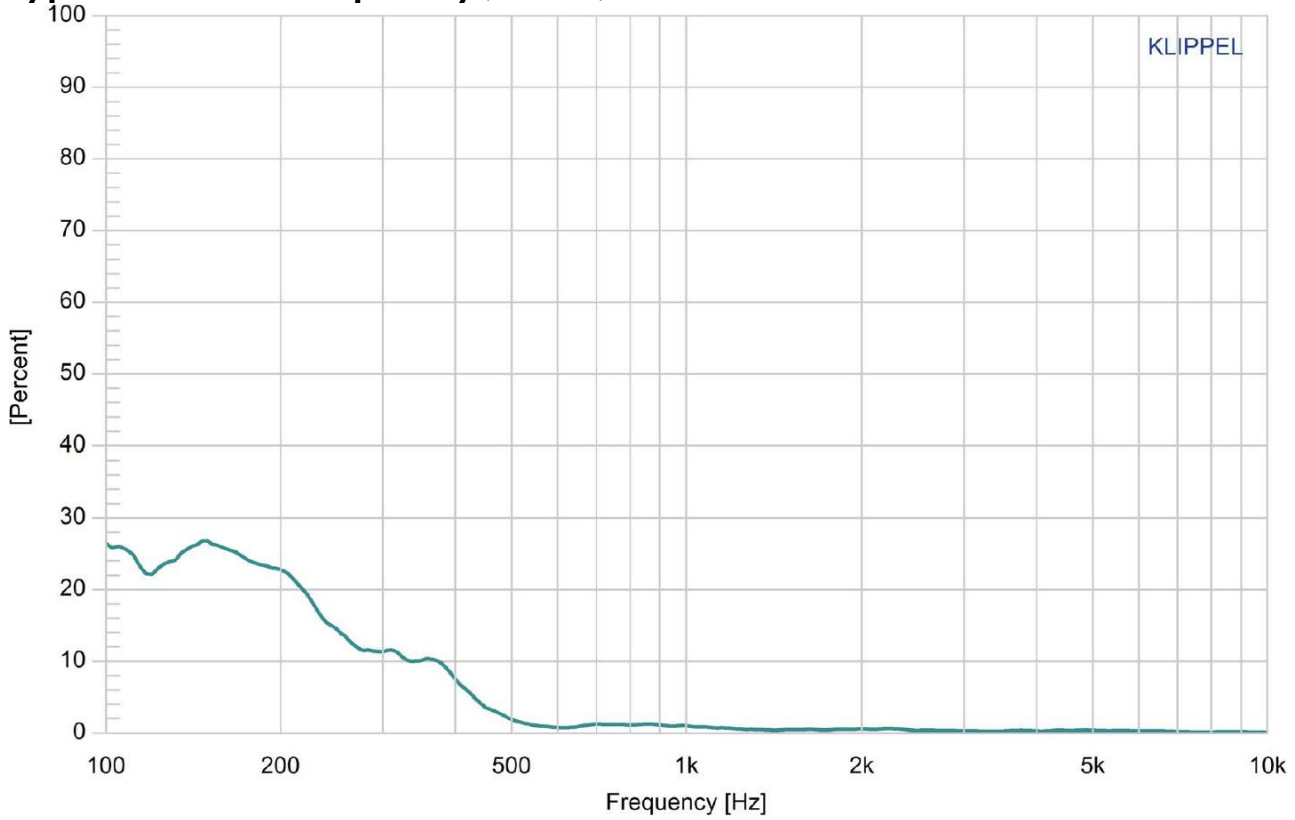


### Typical Impedance Response

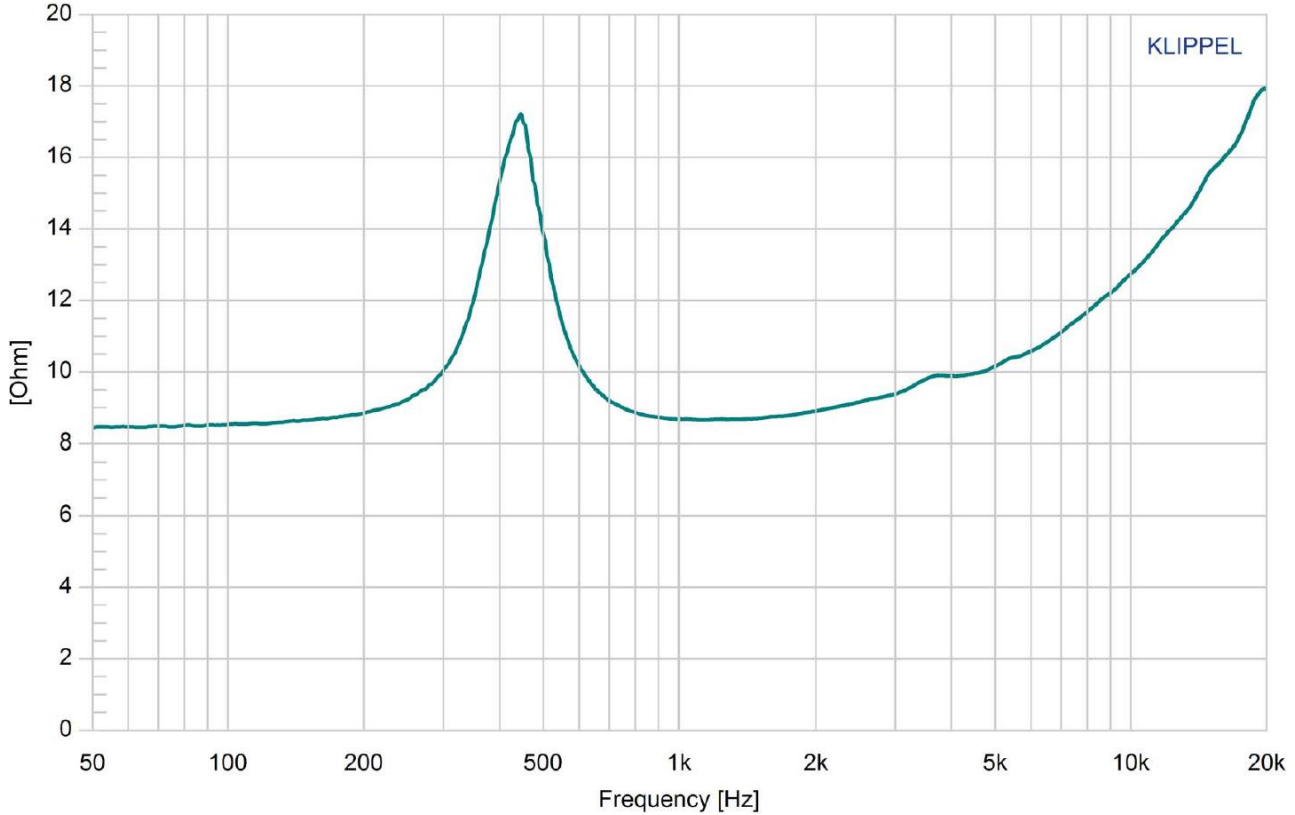

## Mounting Precautions

To ensure normal operation of the speaker, allow enough free space for diaphragm movement. The minimum distance required, "X," is the dimensioned drawing below is

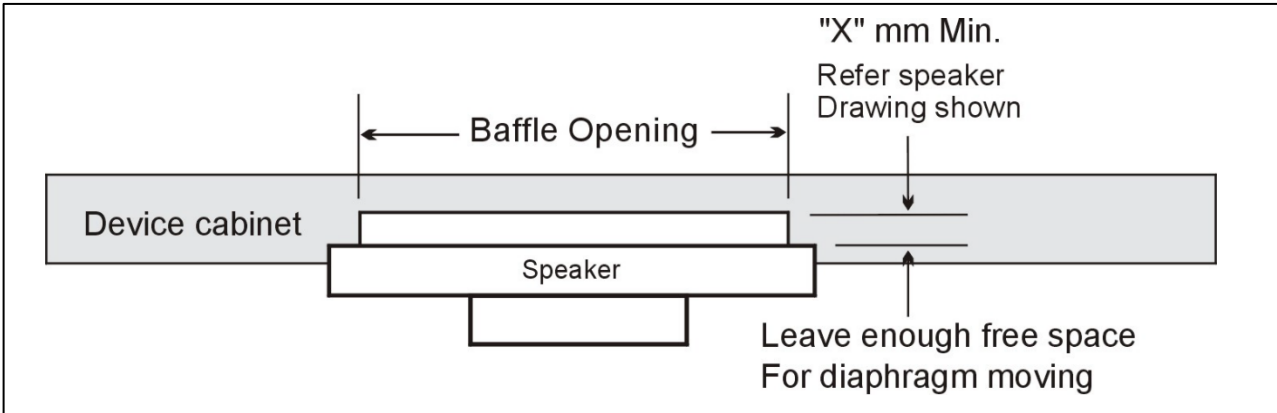


1.5mm.



## Reliability Testing

Type of Test	Test Specifications	Judgement
High Temperature Test GB2423.2-81	96 hours at +85°C ± 2°C followed by one hour in normal room temperature	SPL shall not deviate by ±3dB. Resonant frequency shall not deviate by ±50Hz. (compared with pre-test measurement)
Low Temperature Test GB2423.1-81	96 hours at -45°C ± 2°C followed by one hour in normal room temperature	
Humidity Test	96 hours at +60°C ± 2°C with relative humidity between 90% and 95% followed by 6 hours in normal room temperature	
Temperature Cycle Testing GB5170.18-87		SPL shall not deviate by ±3dB. Resonant frequency shall not deviate by ±80Hz. (compared with pre-test measurement)
Vibration Test GB11606.8-89	Frequency 10~55Hz, amplitude 1.5 mm, for 2 hours on 3 directions (XYZ).	SPL shall not deviate by ±3dB. (compared with pre-test measurement)
Drop Test GB2423.8-81	75 cm free falling on concrete floor, 10 times.	
Load Test	Speaker should not fail after applying 20Hz ~ 20kHz pink noise with HPF maximum power input (RMS), 96 hours.	



**Dimensions** (All dimensions in mm; tolerance is +0.5mm, unless otherwise stated.)

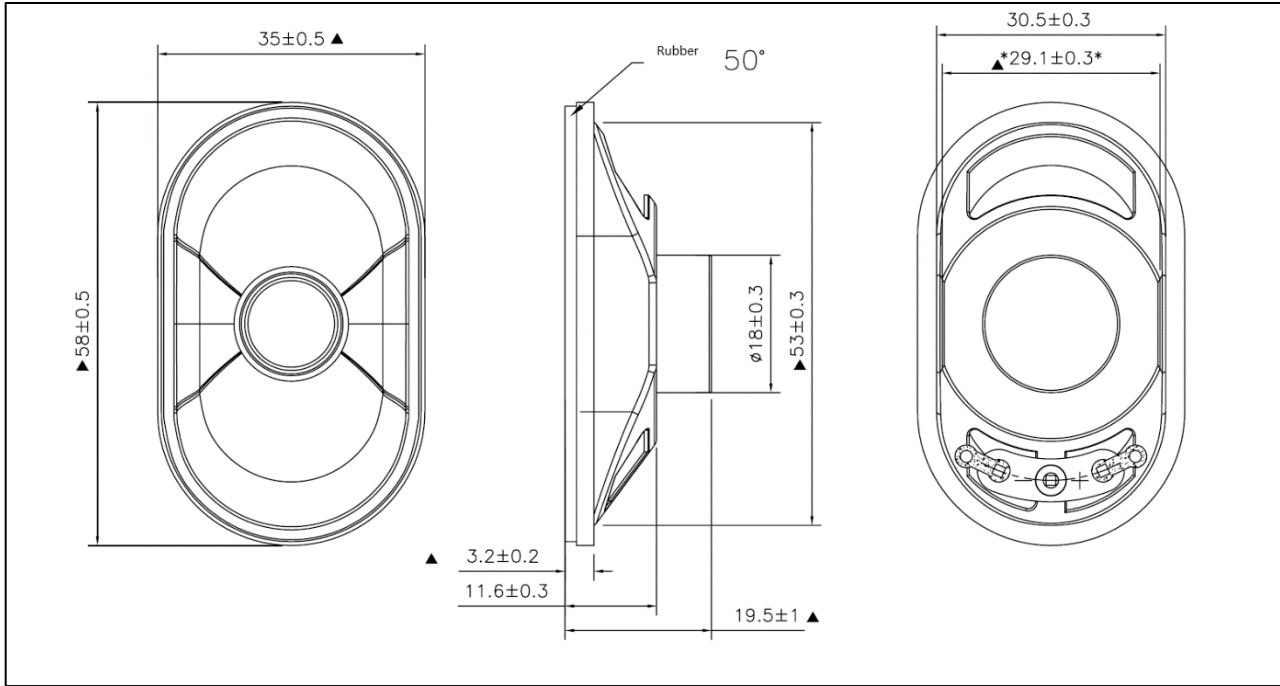

**Packaging**

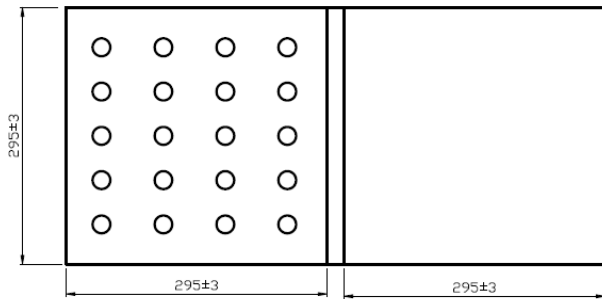

**NOTE**  
 20 PCS per Layer  
 Total 10 Layer per box  
 Total 200 PCS per box  
 31.0\*31.0\*36.0 cm  
 HF+ROHS 2

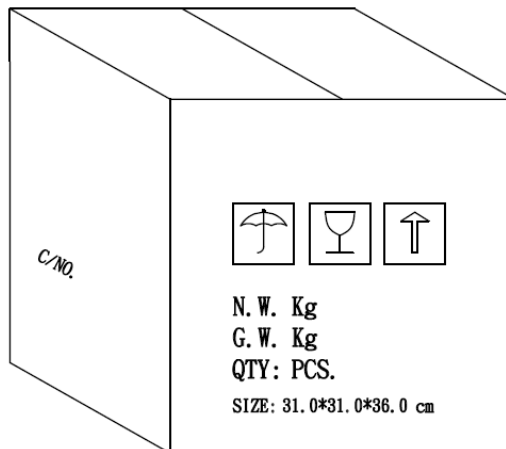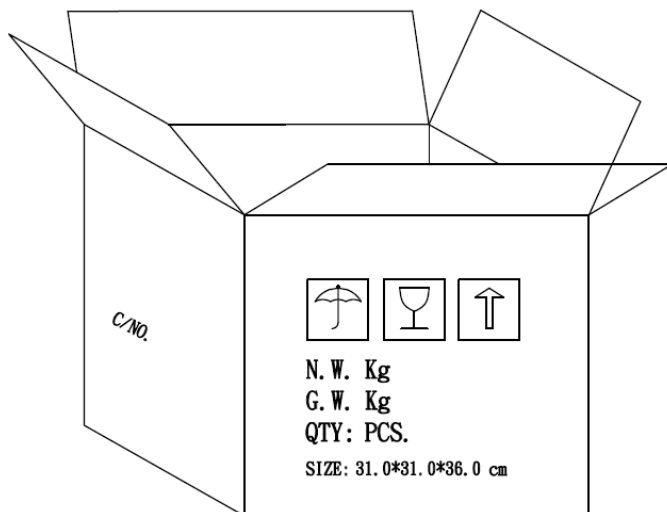

## Notes

### Measurement & Standard Reference

Abstract from GB/T 9396-1996 and IEC 268-5:1989: methods of measurement for main characteristics of loudspeakers.

### Rated sine voltage.

A sinusoidal signal voltage specified by the manufacturer which makes the speaker work continuously in the rated frequency range, without causing electrical or mechanical damage to the speaker. The continuous voltage time is 1 hour.

### Rated sine power.

The rated sine power corresponding with the rated sine voltage defined by:  $V_s^2/R$ , where  $V_s$  indicates the rated sin voltage and R indicates the rated impedance of the speaker.

### Rated noise power.

The rated sine power corresponding with the rated sine voltage defined by:  $V_n^2/R$ , where  $V_n$  indicates the rated sin voltage and R indicates the rated impedance of the speaker.

### Specifications Revisions

Revision	Description	Date	Approved
A	Datasheet released from Engineering	03/25/2024	KH

Note:

- Unless otherwise specified:
  - All dimensions are in millimeters.
  - Default tolerances are  $\pm 0.5\text{mm}$  and angles are  $\pm 3^\circ$ .
- Specifications subject to change or withdrawal without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AS05808PO-WP](#)