

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	ConneXium
Product or component type	Ethernet TCP/IP managed switch
Concept	Transparent Ready
Communication port protocol	Ethernet TCP/IP
Port Ethernet	10BASE-T/100BASE-TX - 6 port(s) copper cable 100BASE-FX - 3 port(s) fiber optic
Maximum number of switches in cascade	Unlimited

Complementary

Integrated connection type	Duplex SC fiber optic Shielded RJ45 copper cable
Transmission support medium	Twisted shielded pairs cable CAT 5E fiber optic Multimode optical fiber copper cable
Cable distance between devices	<= 100 m copper cable
Attenuation	11 dB 62.2/125 μ m 8 dB 50/125 μ m
Ethernet service	Configuration via web server SMTP V3 Rapid Scanning Tree Protocol (RSTP) Priority port FDR IGMP Snooping Multicast filtering SNTP client Data stream control Secure port
Maximum number of switches in a ring	50
Redundancy	Ring coupling Redundant power supplies Redundant single ring
Supply voltage limits	9.6...32 V DC SELV
Power consumption in W	9 W
Electrical connection	Removable connector 6 ways power supply
Mounting support	35 mm symmetrical DIN rail
Marking	CE
Local signalling	1 LED fault 2 LEDs P1 P2 power supplies 1 LED ring manager 1 LED stand-by 1 LED per channel copper port activity 1 LED per channel copper port status
Alarm output	1 voltfree contact 1 A
Alarm function	Power supply fault Switch fault Data link status
Ethernet cabling system	TF switches
Width	2.91 in (74 mm)
Height	5.16 in (131 mm)
Depth	4.37 in (111 mm)
Product weight	0.9 lb(US) (0.41 kg)


Environment

Ambient air temperature for operation	32...140 °F (0...60 °C)
Relative humidity	0...95 % without condensation
IP degree of protection	IP20
Standards	UL 508 CSA C22.2 No 214 EN/IEC 61131-2 CSA C22.2 No 213 Class I Division 2 UL 1604 Class 1 Division 2

Ordering and shipping details

Category	18225 - PLC NTWRK HRDWR & PROWORX SOFTWARE
Discount Schedule	PC41
GTIN	003595864115443
Nbr. of units in pkg.	1
Package weight(Lbs)	0.9000000000000002
Returnability	N
Country of origin	DE


Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1104 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
California proposition 65	WARNING: This product can expose you to chemicals including:
----- Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
----- More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

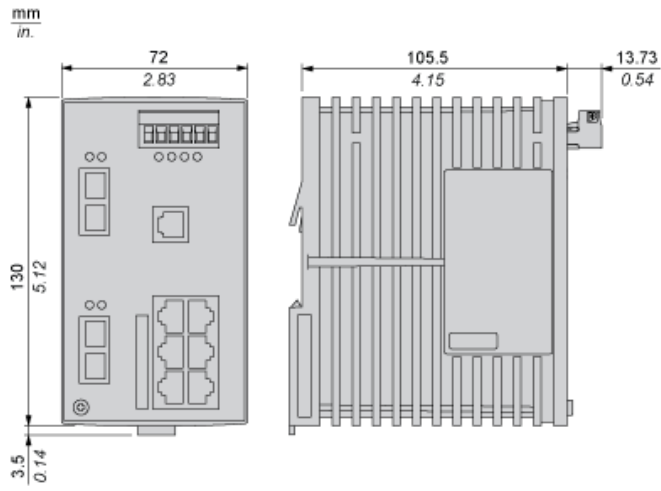

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[TCSESB093F2CU0](#)