



Schneider Electric Relays


200 N. Martingale Rd., Suite 1000

Schaumburg, IL 60173

Phone: 847-441-2540 • Fax: 847-881-0741

E-Mail: relays@schneider-electric.com • Web site: www.serelays.com

ITEM # 784XDXM4L-120A, 784 ICE CUBE RELAYS / 4PDT, 15 AMP RATING

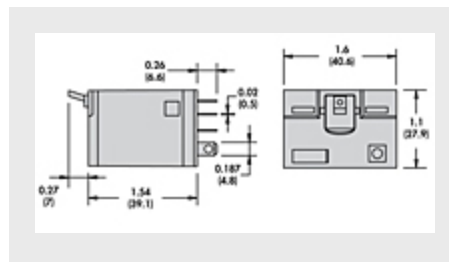

[SPECIFICATIONS](#) | [COIL CHARACTERISTICS](#) | [PERFORMANCE CHARACTERISTICS](#) | [ENVIRONMENT](#) | [PRODUCT CERTIFICATIONS](#)

Specifications

Check Inventory

[Check Distributor Inventory](#)

Status

Standard

Terminal Style

Plug-in

Contact Configuration

4PDT

Thermal (Carrying) Current

15 A

Coil Resistance (Ohms)

2100 Ohm

Load Type

Standard

Contact Materials

Silver Alloy

Maximum Switching Voltages

IEC: 250 VAC
UL/CSA: 300 VAC

Switching Current at Voltage (AC, Resistive)

CSA: 15 A at 150 VAC 50/60 Hz (30A max. total)
UL: 15 A at 277 VAC 50/60 Hz

Switching Current at Voltage (DC, Resistive)

IEC: 15 A at 28 VDC
UL: 15A at 28 VDC

Switching Current at Voltage (HP)	1 at 277 VAC hp 1/2 at 120 VAC hp
------------------------------------------	--------------------------------------

Pilot Duty	B300
-------------------	------

Minimum Switching Requirement	10 mA at 17 VDC
--------------------------------------	-----------------

Cover Options	Full Featured
----------------------	---------------

Features	Locking push button, Mechanical flag indicator, Removable ID tag, Bi-polar LED
-----------------	--------------------------------------------------------------------------------

California Proposition 65 Warning



WARNING: This product can expose you to chemicals including:
Substance 1: Nickel compounds, which is known to the State of California to cause cancer.
Substance 2: DIDP, which is known to the State of California to cause birth defects or other reproductive harm.
 For more information go to www.p65warnings.ca.gov

Coil Characteristics

Coil Voltage	120 VAC 50/60 Hz
---------------------	------------------

Operating Range - % of Nominal (AC)	85 to 110 %
--------------------------------------------	-------------

Operating Range - % of Nominal (DC)	80 to 110 %
--------------------------------------------	-------------

Average Consumption (AC / VA)	2.50 VA
--------------------------------------	---------

Average Consumption (DC / W)	1.60 W
-------------------------------------	--------

Drop-out Voltage Threshold (AC)	15 %
----------------------------------------	------

Drop-out Voltage Threshold (DC)	10 %
----------------------------------------	------

Performance Characteristics

Electrical Life (UL508), Operations at Rated Current (Resistive)	100000
-------------------------------------------------------------------------	--------

Mechanical Life, Unpowered	10000000
-----------------------------------	----------

Operating Time (Response Time)	20 ms
---------------------------------------	-------

Dielectric Strength - Between Coil and Contact (AC)	2000 V(rms)
------------------------------------------------------------	-------------

Dielectric Strength - Between Poles (AC)	2000 V(rms)
-------------------------------------------------	-------------

Environment

Vibration Resistance - Operational	±1 mm (10-35 Hz) and 3 gn (35-150 Hz)
-------------------------------------------	---------------------------------------

Shock Resistance	15 g-n
-------------------------	--------

Degree of Protection	IP 40
-----------------------------	-------

Weight	80 g 2.82 oz
---------------	-----------------

Product Certifications -

Agency Approvals	CSA (44087) UL (E164862) CE RoHs
-------------------------	-------------------------------------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[784XDXM4L-120A](#)