

| т | ۵ | п | m | 0 |
|---|---|---|---|---|
|   |   |   |   |   |



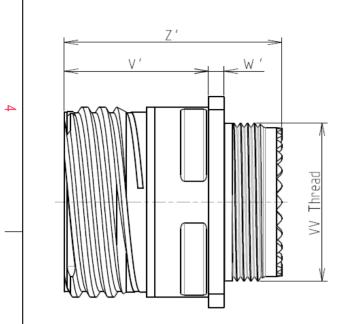



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 09

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

|   | -Shell Material                                  | : Composite                            |  |  |  |
|---|--|--|--|--|--|
|   | -Shell Plating                                   | : Nickel                               |  |  |  |
|   | -Insulator                                       | : Thermoplastic                        |  |  |  |
|   | -Contacts  | : Copper Alloy                         |  |  |  |
|   | -Seals & Grommet                                 | : Silicon Elastomer                    |  |  |  |
| 2 | -Contact Plating                                 | : Gold over copper Alloy 0.8µm minimum |  |  |  |
|   | -Durability                                      | : 500 Mating cycles                    |  |  |  |
|   | -Delivered with Souriau contacts and Accessories |  |  |  |  |
|   | -Temperature Range                               | 65°C to +200°C                         |  |  |  |
|   | -Salt Spray                                      | : 2000 hours                           |  |  |  |
|   | -Mass  | : 7.8 g ± 10%                          |  |  |  |
|   |  |  |  |  |  |

8D 0

G

09

Μ

98

А

F

D


| Connector dimension |             |  |  |
|---------------------|-------------|--|--|
| Dim                 | Nominal     |  |  |
| Р                   | 3.25±0.2    |  |  |
| PP                  | 5.49±0.2    |  |  |
| R1                  | 18.26       |  |  |
| R2                  | 15.09       |  |  |
| S                   | 23.8±0.3    |  |  |
| V'                  | 19.5+1.4/-0 |  |  |
| W'                  | 2.1/3.65    |  |  |
| Ζ'                  | 32 Max      |  |  |
| VV THREAD           | M12x1-6g    |  |  |


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е


CONTACT LAYOUT : 09-98



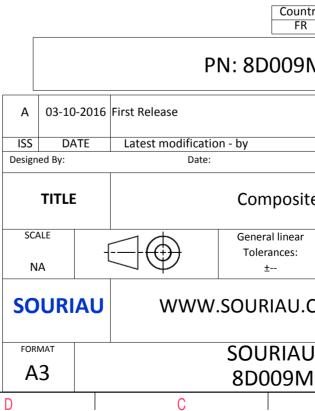

|  | ω   |                | А                                 |        |   |  |
|--|---|----------------|-----------------------------------|--------|---|--|
|  |   |                |                                   |        |   |  |
| ſ                                      |   |                |                                   |        | 4 |  |
| C                                      |   |                |                                   |        | 3 |  |
| S EXAMP                                | LE  |                |                                   |        | 0 |  |
| which do<br>er of the P<br>adation, te | oes not co<br>arties or l<br>echnical n   | liction & Cont |                                   |        |   |  |
| 9M98                                   | AD  | Not Listed     |                                   |        | 2 |  |
|  |   |                |                                   |        |   |  |
|  |   | CUSTOME        | R DRAWING                         | MOD N° |   |  |
| ite Reo                                | e Receptacle 8D series  |                |                                   |        |   |  |
| ar                                     |   |                | <sup>′</sup> PROJECT<br><b>59</b> |        | 1 |  |
| I.COM                                  | COM<br>This document is the property of<br>SOURIAU<br>it must not be reproduced or<br>communicated without permission |                |                                   |        |   |  |
|  |   | 1              |                                   | SHEET  |   |  |
| M98A                                   | AD-C<br>B   |                | A                                 | 1/2    | J |  |
|  | -   | •              |                                   |        |   |  |

|          | <b></b>   | G   | г | m |                          | 0   |                              |
|----------|---|---|---|---|--------------------------|---|------------------------------|
|          |   | Contact Layout  |   |   |                          | Pa  | anel Cutou                   |
| 4        | -X  | $ \begin{array}{c}                                     $  |   |   | ħ                        | SQUARE FLANGE RECEPTACLE (TYPE 0)<br>REAR MOUNTING  |                              |
|          | Conta<br>positio<br>ID<br>A<br>B<br>C<br>C<br>Shell Arrangement Numb<br>size no. conta<br>9 -98 3 | + .065 (1.65) + .038 (0.97)<br>+ .000 (0.00)075 (1.91)<br>065 (1.65) + .038 (0.97)<br>er of Size Service Contact Superse<br>acts contacts rating location |   |   | £ _                      | ØA  | ØT                           |
| ω        |   |   |   |   |                          | Dim<br>ØA<br>ØAA<br>R1<br>ØT  |                              |
|          | F   |   |   |   | [                        |   |                              |
|          |   |   |   |   |                          | SOURIAU shall not be lia<br>due to a use of the Pr<br>the Specifications issued b<br>(professional reco | roducts wh<br>by either of   |
| N        |   |   |   |   |                          | PN: 80  | Countr<br>FR                 |
|          |   |   |   |   | A 03-10-20               | 16 First Release  |                              |
|          |   |   |   |   | ISS DATE<br>Designed By: | Latest modification - by<br>Date:   |                              |
|          |   |   |   |   | TITLE                    |   | nposite                      |
| <u> </u> |   |   |   |   | SCALE<br>NA              |   | eral linear<br>erances:<br>± |
|          |   |   |   |   | SOURIA                   | U WWW.SOUF  | RIAU.C                       |
|          |   |   |   | _ | FORMAT<br>A3             | SOL<br>8D(  | JRIAU<br>009M                |
| L        | Н   | G   | F | E | D                        | С   |                              |

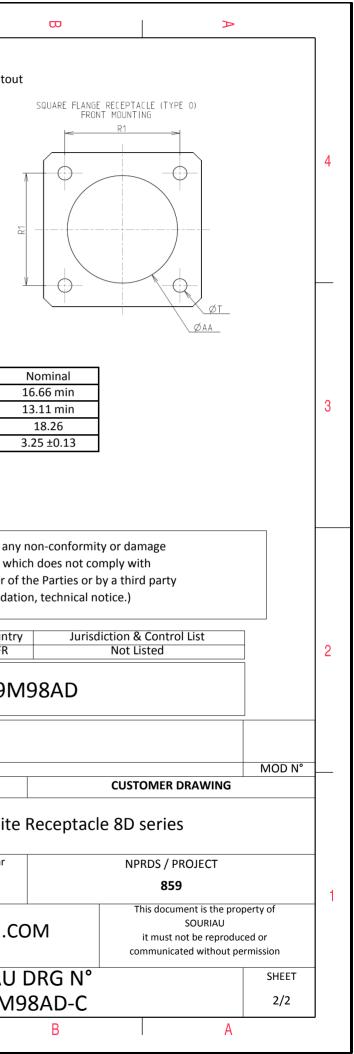

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau: 8D009M98AD