

Features:

- Excellent long-term stability
- Operating temperature up to 175°C
- Advanced sulfur resistance verified according to ASTM B 809
- RoHS compliant, REACH compliant, lead free, and halogen free
- AEC-Q200 compliant




Electrical Specifications

Type/Code	Power Rating (W) @ 70°C	Maximum Working Voltage (V) ⁽¹⁾	Maximum Overload Voltage (V)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance					
					±0.05%	±0.1%	±0.25%	±0.5%	±1%	
RNCE0402	0.063	50	100	± 25	49.9 - 12K	10 - 220K				
				± 50						
RNCE0603	0.1	75	150	± 25	49.9 - 33K	10 - 680K				
				± 50						
RNCE0805	0.125	150	300	± 25	49.9 - 51K	10 - 1M				
				± 50						
RNCE1206	0.25	200	400	± 25	49.9 - 100K	10 - 1.5M				
				± 50						


(1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage
 Operating temperature range is -55°C to +175°C

Mechanical Specifications

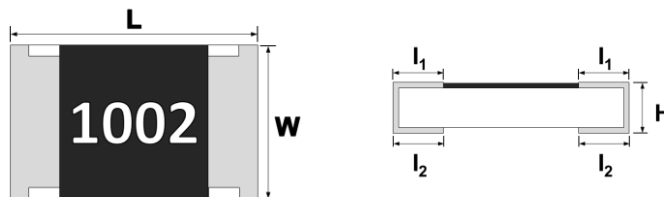

Type/Code	L	W	H	l ₁	l ₂	Unit
	Body Length	Body Width	Body Height	Top Termination	Bottom Termination	
RNCE0402	0.039 ± 0.004	0.020 ± 0.002	0.012 ± 0.002	0.008 ± 0.004	0.008 ± 0.004	inches
	1.00 ± 0.10	0.50 ± 0.05	0.30 ± 0.05	0.20 ± 0.10	0.20 ± 0.10	mm
RNCE0603	0.063 ± 0.006	0.031 ± 0.004	0.018 ± 0.004	0.012 ± 0.008	0.012 ± 0.008	inches
	1.60 ± 0.15	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20	mm
RNCE0805	0.079 ± 0.006	0.049 ± 0.006	0.022 ± 0.004	0.014 ± 0.008	0.016 ± 0.008	inches
	2.00 ± 0.15	1.25 ± 0.15	0.55 ± 0.10	0.35 ± 0.20	0.40 ± 0.20	mm
RNCE1206	0.122 ± 0.006	0.063 ± 0.006	0.022 ± 0.004	0.018 ± 0.008	0.020 ± 0.008	inches
	3.10 ± 0.15	1.60 ± 0.15	0.55 ± 0.10	0.45 ± 0.20	0.50 ± 0.20	mm

Power Derating Curve:

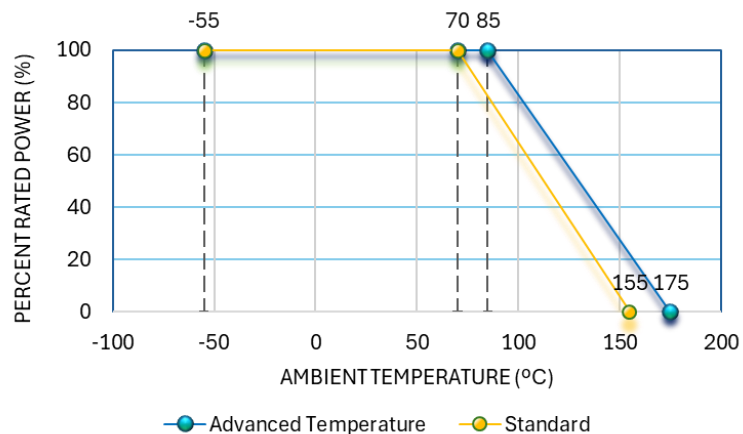

Performance Specifications			
Test	Test Method	Test Specifications	Test Condition
Temperature Coefficient of Resistance (TCR)	JIS-C-5201-1 4.8 IEC-60115-1 4.8	Refer to Electrical Specification table	At 25 / -55°C and 25°C / +125°C, 25°C is the reference temperature
Short Time Overload	JIS-C-5201-1 4.13 IEC-60115-1 4.13	± (0.1% + 0.01Ω) No visual damage	2.5 times RCWV or max. overload voltage whichever is less for 5 seconds
Leaching	JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1	>95% coverage No visual damage	260 ± 5°C for 30 seconds
Resistance to Soldering Heat	JIS-C-5201-1 4.18 IEC-60115-1 4.18	± (0.1% + 0.01Ω) No visual damage	260 ± 5°C for 10 seconds
Insulation Resistance	JIS-C-5201-1 4.6 IEC-60115-1 4.6	≥ 10GΩ	Apply 100VDC for 1 minute
Temperature Cycling	JESD22 Method JA-104	± (0.1% + 0.01Ω) No visual damage	1000 cycles (-55°C to +155°C). Measurement at 24 ± 4 hours after test conclusion. 30 minutes maximum dwell time at each temperature extreme.
Resistance to Solvent	MIL-STD-202 Method 215	± (0.1% + 0.01Ω) No visual damage	Add aqueous wash chemical - OKEM clean or equivalent
Biased Humidity	MIL-STD-202 Method 103	± (0.1% + 0.01Ω)	1000 hours; 85°C / 85% RH, 10% of operating power. Measurement at 24 ± 4 hours after test conclusion.
High Temperature Exposure (Storage)	MIL-STD-202 Method 108	@155°C standard temperature ± (0.1% + 0.01Ω) @175°C Advanced temperature ± (0.3% + 0.01Ω)	1000 hours. Unpowered. Measurement at 24 ± 4 hours after test conclusion.
Operation Life	MIL-STD-202 Method 108	@70°C standard temperature ± (0.1% + 0.01Ω) @85°C Advanced temperature ± (0.3% + 0.01Ω)	1000 hours; maximum specified operating temperature at 100% rated power without derating. Measurement at 24 ± 4 hours after test conclusion.
External Visual	MIL-STD-883 Method 2009	No visual damage	Electrical test not required Inspect device construction, marking and workmanship.
Mechanical Shock	MIL-STD-202 Method 213	± (0.1% + 0.01Ω)	Wave form: Tolerance for half sine shock pulse. Peak value is 100 g. Normal duration (D) is 6 ms.
Vibration	MIL-STD-202 Method 204	± (0.1% + 0.01Ω)	5 g for 20 minutes, 12 cycles each of 3 orientations. Note: test from 10 - 2000 H
ESD	AEC-Q200-002 or ISO/DIS 10605	± (0.5% + 0.01Ω)	Human body model 0402: 400 V, 0603: 1000 V 0805: 1500 V, 1206: 2000 V

Performance Specifications (cont.)			
Test	Test Method	Test Specifications	Test Condition
Solderability	J-STD-002	>95% Coverage No visual damage	(1) 4 hours 155°C dry heat (2) 245 ± 5°C 3 seconds
Terminal Strength (SMD)	AEC Q200-006	No breakage	Pressurizing force for 60 seconds 0402 / 0603: 8 N 0805 / 1206: 17.7 N
Board Flex	AEC Q200-005	± (0.1% + 0.01Ω)	Bending once for 60 seconds. 3mm
Sulfur Test (FoS)	ASTM B809-95 ANSI/EIA-977	± (1% + 0.01Ω)	105 ± 2°C, unpowered for 1000 hours

Soldering Condition

Wave soldering profile

The graph shows a typical wave soldering profile with two waves. The temperature starts at 100°C, ramps up at ca. +2°C/s to 130°C, then to 230°C. The first wave peaks at 260°C for 10 seconds, followed by a forced cooling period. The second wave peaks at 260°C. The cooling rate is ca. -5°C/s, and the final cooling is ca. -2°C/s. Process limits are shown as dotted lines.

Solder reflow temperature condition

The graph shows a typical solder reflow profile. It starts with a ramp to soak at 150°C (60-120 sec), followed by a preheat/soak phase. The temperature then ramps up at 3°C/s max to a peak of 260°C (60-150 sec). The reflow phase is at 260°C for 30 sec max. The ramp-down rate is 6°C/s max, and the final cooling phase is shown.

The peak temperature of soldering heat is 260°C for 10 seconds.


- Rework temperature (hot air equipment): 350°C, 3 ~ 5 seconds
- Recommended reflow methods:
 - IR, vapor phase oven, hot air oven. If reflow temperature exceed the recommended profile, devices may not meet the performance requirements.

Recommended Land Pattern

A diagram showing a rectangular land pattern with dimensions A (width), B (length), and C (height).


Type/Code	A	B	C	Unit
RNCE0402	0.020	0.063	0.028	inches
	0.50	1.60	0.70	mm
RNCE0603	0.031	0.094	0.039	inches
	0.80	2.40	1.00	mm
RNCE0805	0.051	0.114	0.055	inches
	1.30	2.90	1.40	mm
RNCE1206	0.087	0.165	0.067	inches
	2.20	4.20	1.70	mm

Reel Specifications

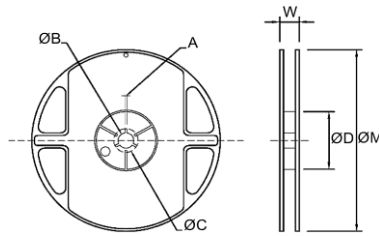

Type/Code	Size		ØA	ØB	ØC	ØD	W	ØM	Unit
0402	7"	10K/Reel	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
			2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
0603/0805/1206	7"	5K/Reel	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
			2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm

Paper Tape Specifications

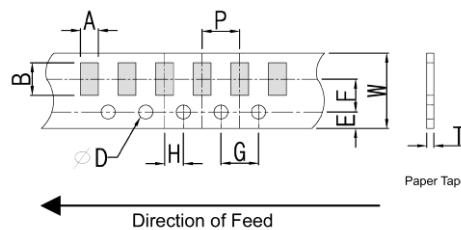

Type/Code	A	B	W	E	F	Unit
RNCE0402	0.028 ± 0.004	0.047 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	0.70 ± 0.10	1.20 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RNCE0603	0.041 ± 0.008	0.071 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.05 ± 0.20	1.80 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RNCE0805	0.061 ± 0.008	0.091 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.55 ± 0.20	2.30 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
RNCE1206	0.075 ± 0.008	0.138 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.90 ± 0.20	3.50 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
Type/Code	G	H	T	ØD	P	Unit
RNCE0402	0.157 ± 0.004	0.079 ± 0.002	0.018 ± 0.004	0.059 +0.004 / -0	0.079 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	0.45 ± 0.10	1.50 +0.1 / -0	2.00 ± 0.10	mm
RNCE0603	0.157 ± 0.004	0.079 ± 0.002	0.024 ± 0.004	0.059 +0.004 / -0	0.157 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	0.60 ± 0.10	1.50 +0.1 / -0	4.00 ± 0.10	mm
RNCE0805	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.059 +0.004 / -0	0.157 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	1.50 +0.1 / -0	4.00 ± 0.10	mm
RNCE1206	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.059 +0.004 / -0	0.157 ± 0.004	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	1.50 +0.1 / -0	4.00 ± 0.10	mm

Part Marking

E96 and E24 Values for 0805 and 1206

The nominal resistance is marked on the surface of the overcoating with the use of **four character markings.**




1.21K Ω

E24 Values for 0603

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings.**

1. Values that are both E24 and E96 follow E96 marking rules.




477 Ω

E96 Values for 0603

A two character number is assigned to each standard R-Value (E96) as shown in the chart below.

This is followed by one alpha character which is used as a multiplier.

Each letter from "Y" - "F" represents a specific multiplier.



10.5 Ω

Chip Marking	Value
01B	10.0 x 100 = 1 K Ω
25C	17.8 x 1000 = 17.8 K Ω
93D	90.9 x 10000 = 909 K Ω

Alpha Character = Multiplier	
Y = 0.1	C = 1000
X = 1	D = 10000
A = 10	E = 100000
B = 100	F = 1000000

E96

#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value	#	R-Value
01	10.0	17	14.7	33	21.5	49	31.6	65	46.4	81	68.1
02	10.2	18	15.0	34	22.1	50	32.4	66	47.5	82	69.8
03	10.5	19	15.4	35	22.6	51	33.2	67	48.7	83	71.5
04	10.7	20	15.8	36	23.2	52	34.0	68	49.9	84	73.2
05	11.0	21	16.2	37	23.7	53	34.8	69	51.1	85	75.0
06	11.3	22	16.5	38	24.3	54	35.7	70	52.3	86	76.8
07	11.5	23	16.9	39	24.9	55	36.5	71	53.6	87	78.7
08	11.8	24	17.4	40	25.5	56	37.4	72	54.9	88	80.6
09	12.1	25	17.8	41	26.1	57	38.3	73	56.2	89	82.5
10	12.4	26	18.2	42	26.7	58	39.2	74	57.6	90	84.5
11	12.7	27	18.7	43	27.4	59	40.2	75	59.0	91	86.6
12	13.0	28	19.1	44	28.0	60	41.2	76	60.4	92	88.7
13	13.3	29	19.6	45	28.7	61	42.2	77	61.9	93	90.9
14	13.7	30	20.0	46	29.4	62	43.2	78	63.4	94	93.1
15	14.0	31	20.5	47	30.1	63	44.2	79	64.9	95	95.3
16	14.3	32	21.0	48	30.9	64	45.3	80	66.5	96	97.6

Note: 0402 size is unmarked.

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
RNCE	High Temperature High Stability Thin Film Chip Resistor	SMD	YES	100% Matte Sn over Ni	Always	Always

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.


Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

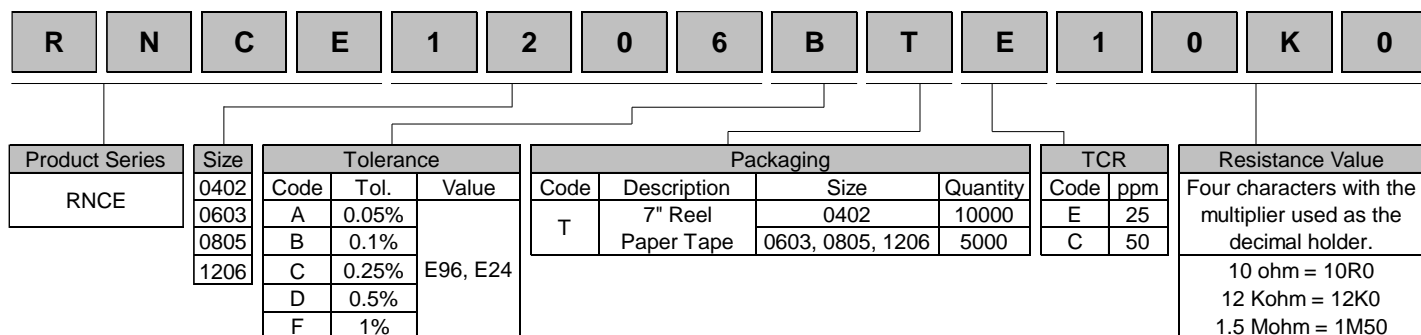

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SEI Stackpole:

[RNCE0603BTE100R](#) [RNCE0805BTC102R](#) [RNCE0805BTC137R](#) [RNCE0805BTC14R7](#) [RNCE0805BTC1K00](#)
[RNCE0805BTC205R](#) [RNCE0805BTC226R](#) [RNCE0805BTC23R7](#) [RNCE0805BTC2K21](#) [RNCE0805BTC2K74](#)
[RNCE0805BTC301R](#) [RNCE0805BTC36R0](#) [RNCE0805BTC383R](#) [RNCE0805BTC39K0](#) [RNCE0805BTC3K40](#)
[RNCE0805BTC3K90](#) [RNCE0805BTC412R](#) [RNCE0805BTC44R2](#) [RNCE0805BTC46K4](#) [RNCE0805BTC51R0](#)
[RNCE0805BTC536R](#) [RNCE0805BTC64K9](#) [RNCE0805BTC6K81](#) [RNCE0805BTC732R](#) [RNCE0805BTC7K68](#)
[RNCE0805BTE11K3](#) [RNCE0805BTE124K](#) [RNCE0805BTE12K7](#) [RNCE0805BTE13K0](#) [RNCE0805BTE14K7](#)
[RNCE0805BTE16K2](#) [RNCE0805BTE18R2](#) [RNCE0805BTE20R5](#) [RNCE0805BTE221K](#) [RNCE0805BTE26K7](#)
[RNCE0805BTE280K](#) [RNCE0805BTE28R7](#) [RNCE0805BTE300K](#) [RNCE0805BTE34K0](#) [RNCE0805BTE37K4](#)
[RNCE0805BTE3K65](#) [RNCE0805BTE40K2](#) [RNCE0805BTE511R](#) [RNCE0805BTE576K](#) [RNCE0805BTE59R0](#)
[RNCE0805BTE5K62](#) [RNCE0805BTE620K](#) [RNCE0805BTE80K6](#) [RNCE0805BTE825K](#) [RNCE0805BTE8K45](#)
[RNCE0805BTE931K](#) [RNCE0805DTC100R](#) [RNCE0805DTC10R7](#) [RNCE0805DTC120R](#) [RNCE0805DTC15R8](#)
[RNCE0805DTC169K](#) [RNCE0805DTC174R](#) [RNCE0805DTC19R1](#) [RNCE0805DTC20K0](#) [RNCE0805DTC249K](#)
[RNCE0805DTC28K0](#) [RNCE0805DTC2K80](#) [RNCE0805DTC309K](#) [RNCE0805DTC332K](#) [RNCE0805DTC36R5](#)
[RNCE0805DTC42K2](#) [RNCE0805DTC43K2](#) [RNCE0805DTC475R](#) [RNCE0805DTC48K7](#) [RNCE0805DTC4K12](#)
[RNCE0805DTC510K](#) [RNCE0805DTC51R1](#) [RNCE0805DTC53K6](#) [RNCE0805DTC56K2](#) [RNCE0805DTC590K](#)
[RNCE0805DTC619R](#) [RNCE0805DTC634K](#) [RNCE0805DTC6K19](#) [RNCE0805DTC71R5](#) [RNCE0805DTC787R](#)
[RNCE0805DTC866R](#) [RNCE0805DTC8K66](#) [RNCE0805DTE124R](#) [RNCE0805DTE130K](#) [RNCE0805DTE143K](#)
[RNCE0805DTE162R](#) [RNCE0805DTE187K](#) [RNCE0805DTE1K58](#) [RNCE0805DTE21K0](#) [RNCE0805DTE274K](#)
[RNCE0805DTE294K](#) [RNCE0805DTE37R4](#) [RNCE0805DTE442R](#) [RNCE0805DTE453R](#) [RNCE0805DTE51K0](#)
[RNCE0805DTE53R6](#) [RNCE0805DTE562K](#) [RNCE0805DTE576R](#) [RNCE0805DTE60K4](#) [RNCE0805DTE620R](#)