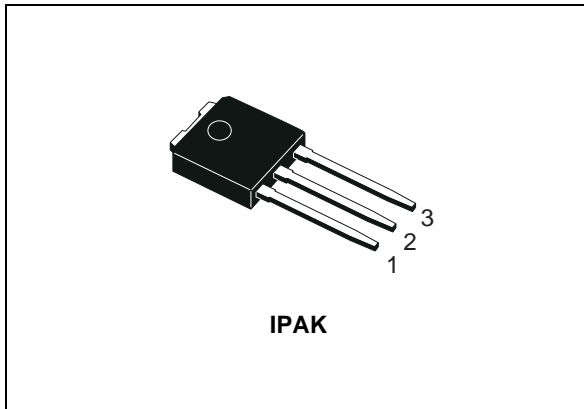


## High voltage fast-switching NPN power transistor

Datasheet - production data


**Features**


- High voltage capability
- Low spread of dynamic parameters
- Very high switching speed

**Application**

- Switch mode power supplies (AC-DC converters)

**Description**

This device is manufactured using high voltage multi epitaxial planar technology for high switching speeds and high voltage capability. It uses a cellular emitter structure with planar edge termination to enhance switching speeds while maintaining a wide RBSOA.

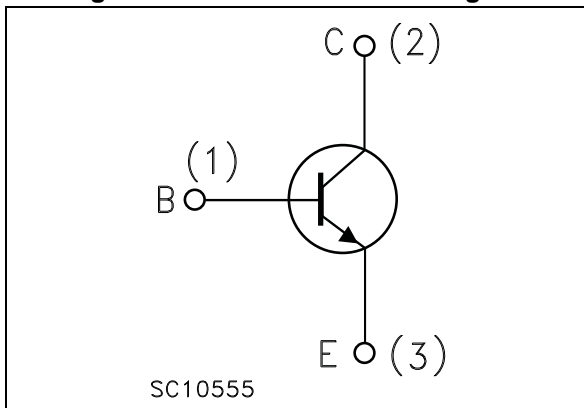**Figure 1. Internal schematic diagram**

**Table 1. Device summary**

| Order code | Marking | Package | Packaging |
|------------|---------|---------|-----------|
| STU13005N  | U13005N | IPAK    | Tube      |

# Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Electrical ratings</b> .....               | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics</b> .....       | <b>4</b>  |
|          | 2.1 Electrical characteristics (curves) ..... | 5         |
| <b>3</b> | <b>Test circuits</b> .....                    | <b>7</b>  |
| <b>4</b> | <b>Package mechanical data</b> .....          | <b>8</b>  |
| <b>5</b> | <b>Revision history</b> .....                 | <b>10</b> |

# 1 Electrical ratings

**Table 2. Absolute maximum ratings**

| Symbol    | Parameter  | Value         | Unit |
|-----------|--|---------------|------|
| $V_{CES}$ | Collector-emitter voltage ( $V_{BE} = 0$ )                       | 700           | V    |
| $V_{CEO}$ | Collector-emitter voltage ( $I_B = 0$ )                          | 400           | V    |
| $V_{EBO}$ | Emitter-base voltage ( $I_C = 0$ ; $I_B = 1.5$ A; $t_p < 10$ ms) | $V_{(BR)EBO}$ | V    |
| $I_C$     | Collector current  | 3             | A    |
| $I_{CM}$  | Collector peak current ( $t_p < 5$ ms)                           | 6             | A    |
| $I_B$     | Base current   | 1.5           | A    |
| $I_{BM}$  | Base peak current ( $t_p < 5$ ms)                                | 3             | A    |
| $P_{TOT}$ | Total dissipation at $T_C = 25$ °C                               | 30            | W    |
| $T_{STG}$ | Storage temperature  | -65 to 150    | °C   |
| $T_J$     | Max. operating junction temperature                              | 150           | °C   |

**Table 3. Thermal data**

| Symbol     | Parameter                            | Value | Unit |
|------------|--------------------------------------|-------|------|
| $R_{thJC}$ | Thermal resistance junction-case max | 4.2   | °C/W |

## 2 Electrical characteristics

$T_{case} = 25\text{ °C}$  unless otherwise specified.

**Table 4. Electrical characteristics**

| Symbol               | Parameter  | Test conditions  | Min. | Typ. | Max. | Unit          |
|----------------------|--|--|------|------|------|---------------|
| $I_{CES}$            | Collector cut-off current<br>( $V_{BE} = 0$ )            | $V_{CE} = 700\text{ V}$  |      |      | 1    | mA            |
|                      |  | $V_{CE} = 700\text{ V}$ $T_C = 125\text{ °C}$  |      |      | 5    | mA            |
| $I_{CEO}$            | Collector-cut-off current<br>( $I_B = 0$ )               | $V_{CE} = 400\text{ V}$  |      |      | 1    | mA            |
| $V_{(BR)EBO}$        | Emitter base breakdown<br>voltage<br>( $I_C = 0$ )       | $I_E = 10\text{ mA}$   | 9    |      | 18   | V             |
| $V_{CEO(sus)}^{(1)}$ | Collector-emitter<br>sustaining voltage<br>( $I_B = 0$ ) | $I_C = 10\text{ mA}$   | 400  |      |      | V             |
| $V_{CE(sat)}^{(1)}$  | Collector-emitter<br>saturation voltage                  | $I_C = 1\text{ A}$ $I_B = 200\text{ mA}$   |      |      | 0.5  | V             |
|                      |  | $I_C = 2\text{ A}$ $I_B = 500\text{ mA}$   |      |      | 0.6  | V             |
|                      |  | $I_C = 3\text{ A}$ $I_B = 750\text{ mA}$   |      |      | 5    | V             |
| $V_{BE(sat)}^{(1)}$  | Base-emitter saturation<br>voltage                       | $I_C = 1\text{ A}$ $I_B = 200\text{ mA}$   |      |      | 1.2  | V             |
|                      |  | $I_C = 2\text{ A}$ $I_B = 500\text{ mA}$   |      |      | 1.6  | V             |
| $h_{FE}^{(1)}$       | DC current gain  | $I_C = 500\text{ }\mu\text{A}$ $V_{CE} = 2\text{ V}$   | 15   |      |      |               |
|                      |  | $I_C = 425\text{ mA}$ $V_{CE} = 2\text{ V}$  | 24   |      |      |               |
|                      |  | $I_C = 1\text{ A}$ $V_{CE} = 5\text{ V}$   | 10   |      | 30   |               |
|                      |  | $I_C = 2\text{ A}$ $V_{CE} = 5\text{ V}$   | 8    |      | 24   |               |
| $t_s$<br>$t_f$       | Resistive load   | $I_C = 2\text{ A}$ $V_{CC} = 125\text{ V}$<br>$I_{B1} = -I_{B2} = 400\text{ mA}$<br>$t_p = 30\text{ }\mu\text{s}$                        |      | 1.65 |      | $\mu\text{s}$ |
|                      | Storage time   |  |      | 260  |      | ns            |
| $t_s$<br>$t_f$       | Inductive load   | $I_C = 1\text{ A}$ $V_{clamp} = 300\text{ V}$<br>$I_{B1} = 200\text{ mA}$ $V_{BE(off)} = -5\text{ V}$<br>$L = 50\text{ mH}$ $R_{BB} = 0$ |      | 0.8  |      | $\mu\text{s}$ |
|                      | Storage time   |  |      | 150  |      | ns            |
|                      | Fall time  |  |      |      |      |               |

1. Pulse test: pulse duration  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$

## 2.1 Electrical characteristics (curves)

Figure 2. Safe operating area

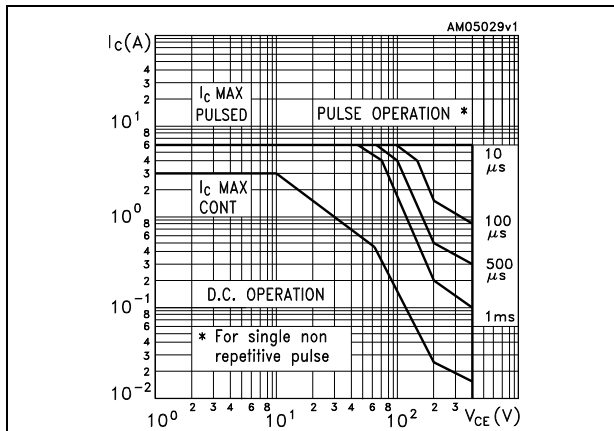


Figure 3. Derating curve

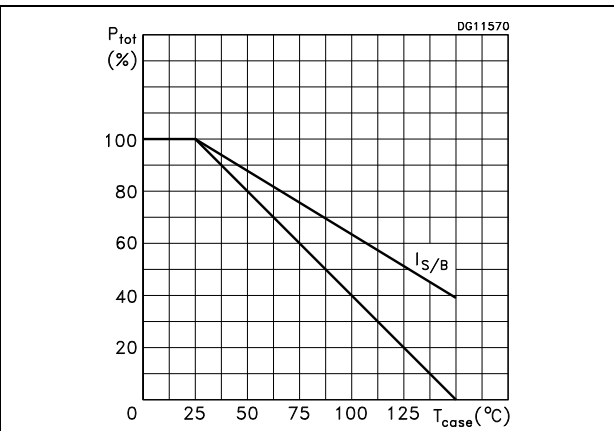


Figure 4. Reverse biased SOA

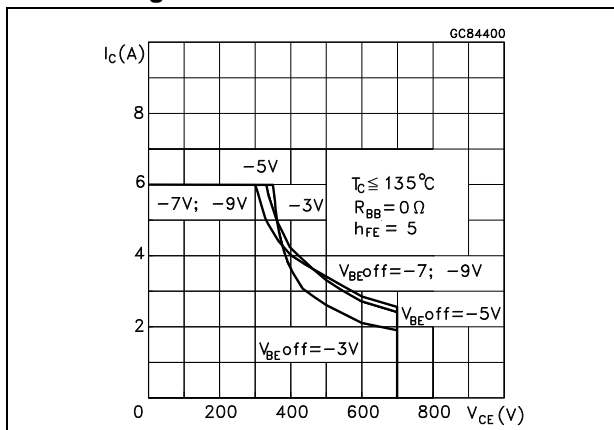


Figure 5. Output characteristics

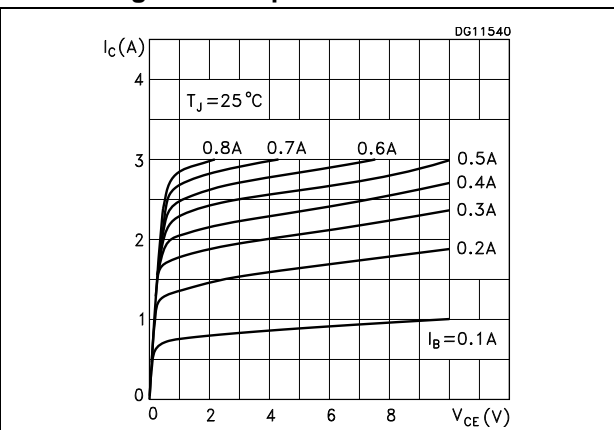


Figure 6. DC current gain (V\_CE = 1 V)

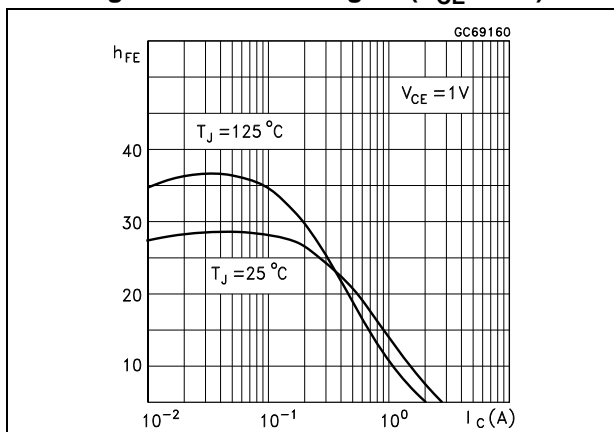


Figure 7. DC current gain (V\_CE = 5 V)

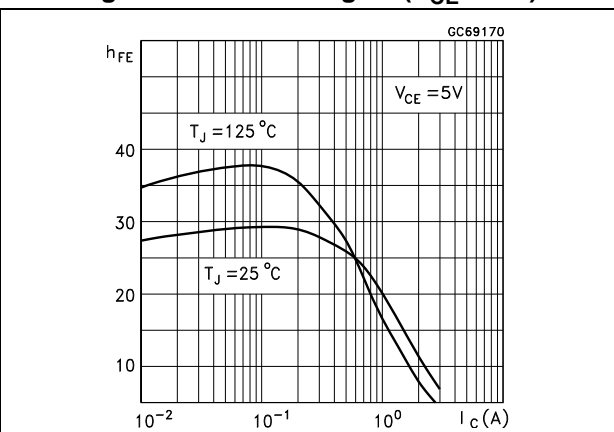


Figure 8. Collector-emitter saturation voltage

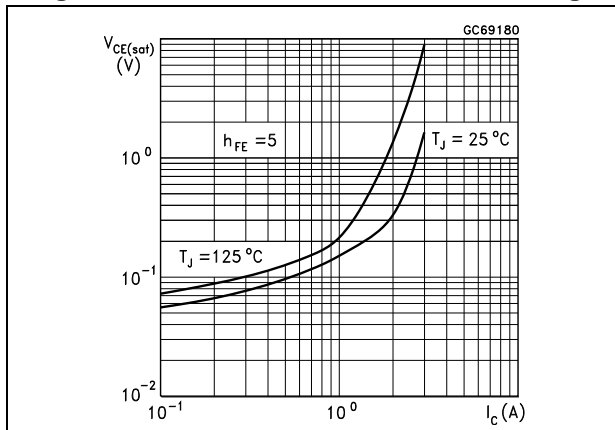


Figure 9. Base-emitter saturation voltage

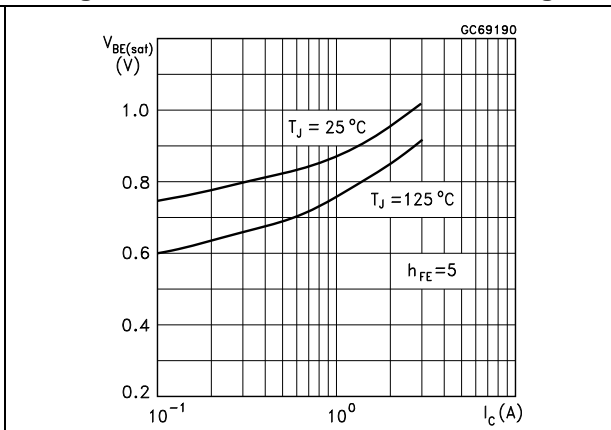


Figure 10. Inductive load fall time

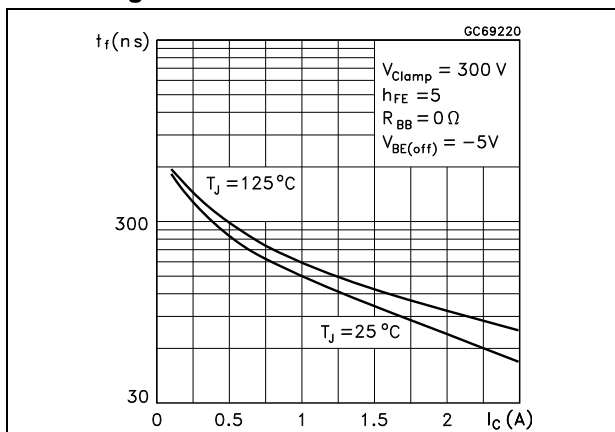


Figure 11. Inductive load storage time

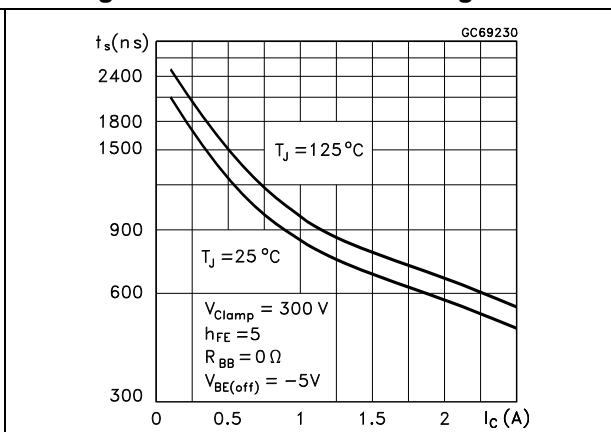


Figure 12. Resistive load fall time



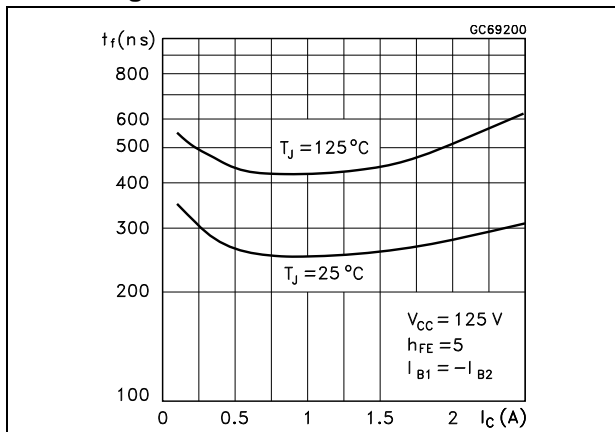


Figure 13. Resistive load storage time

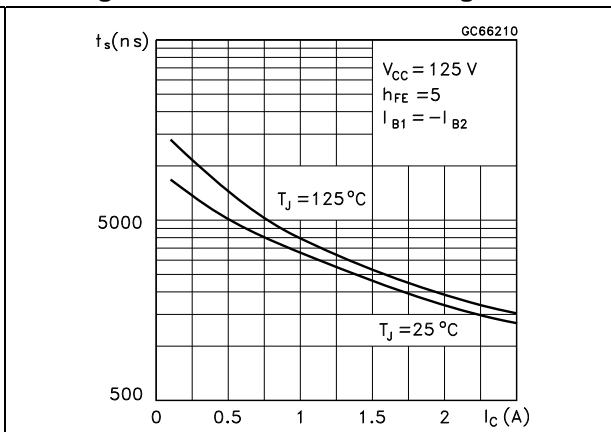


### 3 Test circuits

Figure 14. Inductive load switching test circuit

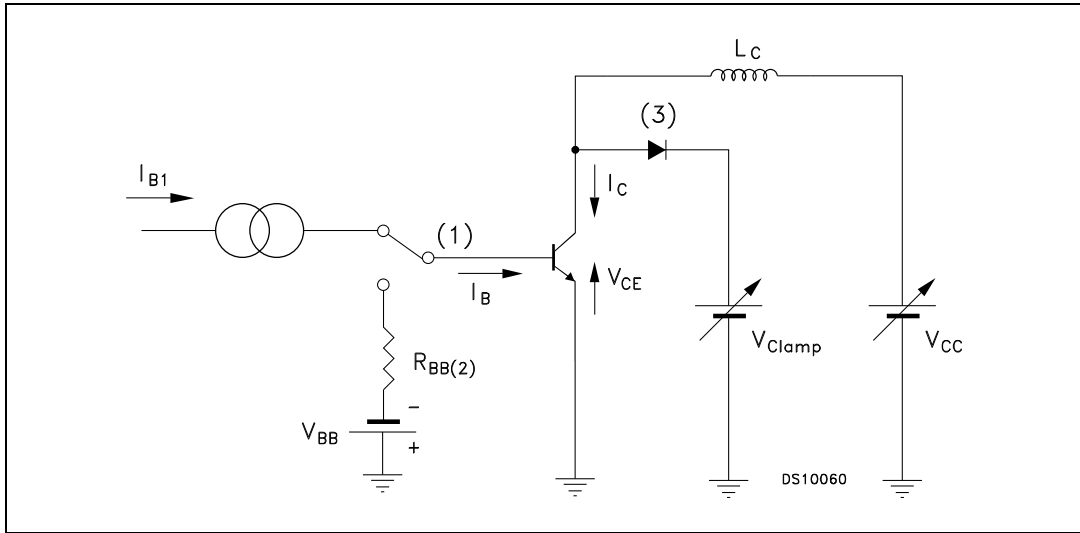

- 1) Fast electronic switch
- 2) Non-inductive resistor
- 3) Fast recovery rectifier

Figure 15. Resistive load switching test circuit

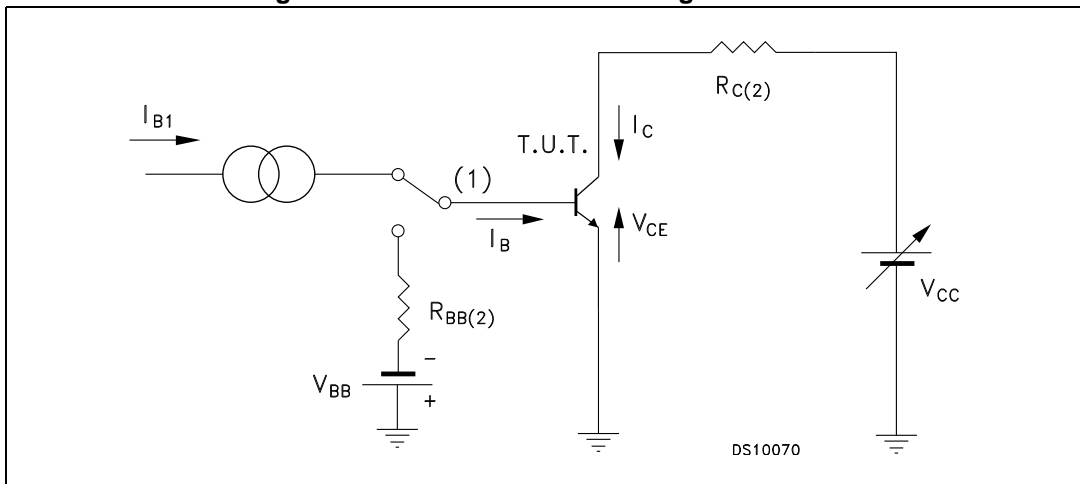

- 1) Fast electronic switch
- 2) Non-inductive resistor

## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

Figure 16. IPAK(TO-251 drawing)

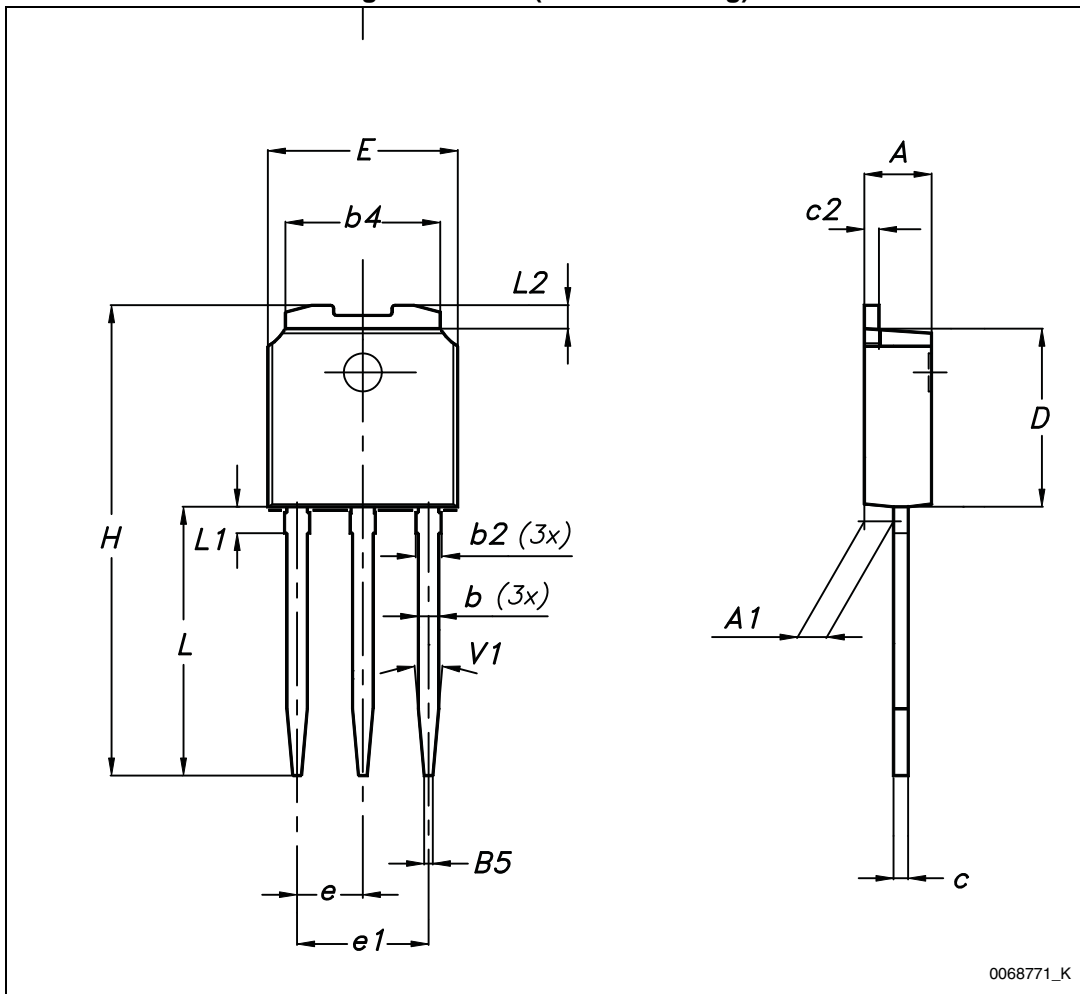




Table 5. IPAK (TO-251) mechanical data

| DIM | mm.  |       |      |
|-----|------|-------|------|
|     | min. | typ.  | max. |
| A   | 2.20 |       | 2.40 |
| A1  | 0.90 |       | 1.10 |
| b   | 0.64 |       | 0.90 |
| b2  |      |       | 0.95 |
| b4  | 5.20 |       | 5.40 |
| B5  |      | 0.30  |      |
| c   | 0.45 |       | 0.60 |
| c2  | 0.48 |       | 0.60 |
| D   | 6.00 |       | 6.20 |
| E   | 6.40 |       | 6.60 |
| e   |      | 2.28  |      |
| e1  | 4.40 |       | 4.60 |
| H   |      | 16.10 |      |
| L   | 9.00 |       | 9.40 |
| L1  | 0.80 |       | 1.20 |
| L2  |      | 0.80  | 1.00 |
| V1  |      | 10°   |      |

## 5 Revision history

Table 6. Document revision history

| Date        | Revision | Changes   |
|-------------|----------|---|
| 20-Feb-2012 | 1        | First release.  |
| 09-May-2014 | 2        | Updated <a href="#">Table 1: Device summary</a> and updated <a href="#">Figure 4: Package mechanical data</a> |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STU13005N](#)