



Part No: TG.30.8111W

Features:

600-6000MHz Operational

Wideband Cellular 5G/4G

Typical 70%+ Efficiency and 3dBi+ Peak Gair

Dipole Straight Terminal Antenna

Straight SMA(M) Connector

RoHS and REACH Compliant



| 1. | Introduction | 2 |
|----|-------------------------|----|
| 2. | Specification | 3 |
| 3. | Antenna Characteristics | 6 |
| 4. | Radiation Patterns | 8 |
| 5. | Mechanical Drawing | 42 |
| 6. | Packaging | 43 |
| | | |
| | Changelog | 44 |
| | | |
| | | |
| | | |
| | | |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.











1. Introduction



The Apex White Straight TG.30 Dipole LTE Antenna- is primarily designed for use with 5G/4G modules and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major cellular (5G/4G/3G/2G) bands worldwide for access points, terminals, and routers. The antenna is a ground plane independent antenna with a SMA (M) connector.

The Apex exhibits high efficiency across the wide band and is backward compatible with 2G and 3G cellular applications such as GSM, LTE, UMTS, WI-FI and even has GPS included for Assisted GPS and/or E911 applications. With very high efficiency on every cellular band globally it is an ideal solution for any device requiring high, reliable performance. It is also guaranteed to meet any type approval or carrier certification requirements from an RF standpoint. It is an omni-directional antenna, and the radiation patterns display this and are stable across all bands.

Typical Applications Include:

- Gateways and Routers
- Smart Metering
- Payment Terminals

It has a quality robust UV resistant housing for use with wireless terminals. This patented antenna is also available in black, with swivel mechanism and right-angled versions. It is also available with swivel mechanism, hinged and right-angle connectors. The connector can be changed subject to NRE or MOQ. For further information please contact your regional Taoglas customer support team.



2. Specification

| LTE Electrical | | | | | | | | | | | |
|------------------------------------|--------------------|-------------------------------------|----------------|-------------------------------------|--------------------|------------|--------------|----------------------|--------|------|---------|
| Band | Frequency (MHz) | Measurement | Efficiency (%) | Average Gain (dB) | Peak Gain (dBi) | Impedance | Polarization | Radiation Pattern | VSWR | | |
| 5GNR/4G | (141112) | 30X30cm Ground plane (Centre) | 56.9 | -2.45 | 1.98 | | | rattern | | | |
| Band 5,8,12,13,14,17,18,20 | 617-960 | Free space | 54.8 | -2.62 | 3.00 | | | | | | |
| ,26,27,28,29,71 | J | 30X30cm Ground plane (Edge) | 53.5 | -2.72 | 2.66 | | | | | | |
| | | 30X30cm Ground plane (Centre) | 54.6 | -2.63 | 5.94 | | | | | | |
| 5GNR/4G Band 21,32,74,75,76 | 1427-1518 | Free space | 49.8 | -3.02 | 4.81 | | | | | | |
| 54114 21,52,7 1,7 5,7 6 | | 30X30cm Ground plane (Edge) | 65.3 | -1.85 | 3.10 | | | | | | |
| 4G/3G | | 30X30cm Ground plane (Centre) | 70.8 | -1.50 | 3.18 | | | | | | |
| Band 1,2,3,4,9,23,25,35,39, | 1710-2200 | Free space | 78.3 | -1.06 | 4.03 | | | | | | |
| 66 | | 30X30cm Ground plane (Edge) | 67.8 | -1.69 | 3.91 | | | | | | |
| | | 30X30cm Ground plane (Centre) | 61.5 | -2.11 | 3.75 | 50.0 Linns | | | | | |
| 4G/3G Band 40 | 2300-2400 | Free space | 75.0 | -1.25 | 4.01 | | | | | | |
| | | 30X30cm Ground plane (Edge) | 67.0 | -1.74 | 3.63 | | linan | O | 3 MAX | | |
| | | | | 30X30cm Ground plane (Centre) | 31.9 | -4.96 | 2.49 | 50 Ω | Linear | Omni | 3 IVIAX |
| Wi-Fi 2400 | 2400-2500 | Free space | 63.1 | -2.00 | 3.32 | | | | | | |
| 2100 | | 30X30cm Ground plane (Edge) | 59.3 | -2.27 | 3.42 | | | | | | |
| | | 30X30cm Ground plane (Centre) | 38.3 | -4.17 | 7.15 | | | | | | |
| 4G/3G Band 7,38,41 | 2490-2690 | Free space | 61.4 | -2.12 | 4.73 | | | | | | |
| 24.14 7,55,1.2 | | 30X30cm Ground plane (Edge) | 48.5 | -3.15 | 4.67 | | | | | | |
| EGND/4G | 3300-3800 | 30X30cm Ground plane (Centre) | 34.0 | -4.69 | 5.17 | | | | | | |
| 5GNR/4G Band | | Free space | 42.4 | -3.73 | 4.84 | | | | | | |
| 22,42,43,48,77,78 | | 30X30cm Ground plane (Edge) | 36.8 | -4.34 | 4.20 | | | | | | |
| | | 30X30cm Ground plane (Centre) | 41.2 | -3.85 | 8.37 | | | | | | |
| LTE5200/ Wi-Fi 5800 | 5150-5925 | Free space | 61.8 | -2.09 | 6.52 | | | | | | |
| | | 30X30cm Ground plane (Edge) | 41.3 | -3.84 | 4.34 | | | | | | |



| Mechanical | | | | |
|---------------------|---------------------|--|--|--|
| Casing | UV Resistant PC/ABS | | | |
| Flammability Rating | UL-94 | | | |
| Connector | SMA Male Straight | | | |

| Environmental | | | | | |
|-------------------|----------------------------|--|--|--|--|
| Temperature Range | -40°C to 85°C | | | | |
| Humidity | Non-condensing 65°C 95% RH | | | | |




| | | 5G/40 | Bands | | |
|-------------|--------------------------|------------------------------|---------------------------------------|-------------------|---------------------------------------|
| Band Number | | 5GNR / FR1 / LTE / LTE | -Advanced / WCDMA / HSPA | / HSPA+ / TD-SCDM | A |
| | Uplink | Downlink | 30X30cm Ground plane (Centre) | Free space | 30X30cm Ground plan |
| B1 | 1920 to 1980 | 2110 to 2170 | √ | ✓ | ✓ |
| B2 | 1850 to 1910 | 1930 to 1990 | ✓ | ✓ | ✓ |
| В3 | 1710 to 1785 | 1805 to 1880 | ✓ | ✓ | ✓ |
| B4 | 1710 to 1755 | 2110 to 2155 | ✓ | ✓ | ✓ |
| B5 | 824 to 849 | 869 to 894 | ✓ | ✓ | ✓ |
| B7 | 2500 to 2570 | 2620 to 2690 | ✓ | ✓ | √ |
| B8 | 880 to 915 | 925 to 960 | ✓ | ✓ | ✓ |
| B9* | 1749.9 to 1784.9 | 1844.9 to 1879.9 | ✓ | ✓ | ✓ |
| B11 | 1427.9 to 1447.9 | 1475.9 to 1495.9 | . | ✓ | · ✓ |
| B12 | 699 to 716 | 729 to 746 | √ | · / | · / |
| B13 | 777 to 787 | 746 to 756 | · / | , ✓ | · • |
| B14 | 777 to 787 788 to 798 | 758 to 768 | ▼ | → | · · |
| | | | | * | · · · · · · · · · · · · · · · · · · · |
| B17 | 704 to 716 | 734 to 746 | ✓, | | |
| B18 | 815 to 830 | 860 to 875 | √ | ✓, | √ |
| B19 | 830 to 845 | 875 to 890 | ✓. | ✓. | ✓. |
| B20 | 832 to 862 | 791 to 821 | ✓ | ✓ | ✓ |
| B21 | 1447.9 to 1462.9 | 1495.9 to 1510.9 | ✓ | ✓ | ✓ |
| B22* | 3410 to 3490 | 3510 to 3590 | ✓ | ✓ | ✓ |
| B23* | 2000 to 2020 | 2180 to 2200 | ✓ | ✓ | ✓ |
| B24 | 1626.5 to 1660.5 | 1525 to 1559 | ✓ | ✓ | ✓ |
| B25 | 1850 to 1915 | 1930 to 1995 | ✓ | ✓ | ✓ |
| B26 | 814 to 849 | 859 to 894 | ✓ | ✓ | ✓ |
| B27* | 807 to 824 | 852 to 869 | ✓ | ✓ | ✓ |
| B28 | 703 to 748 | 758 to 803 | ✓ | ✓ | ✓ |
| B29 | 717 to | | · | ✓ | ✓ |
| B30 | 2305 to 2315 | 2350 to 2360 | √ | √ | √ |
| B31 | 452.5 to 457.5 | 462.5 to 467.5 | * | * | * |
| B32 | | | | | <u>~</u> |
| | 1452 to 1496 | | · / | · / | · / |
| B34 | 2010 to 2025 | | · · · · · · · · · · · · · · · · · · · | ∀ | * |
| B35 | 1850 to 1910 | | | | |
| B36 | 1930 to 1990 | | √ | ✓, | ✓. |
| B37 | 1910 to 1930 | | ✓. | ✓. | ✓. |
| B38 | 2570 to 2620 | | √ | ✓. | ✓. |
| B39 | 1880 to | | ✓. | ✓. | ✓. |
| B40 | 2300 to | o 2400 | ✓ | ✓ | ✓ |
| B41 | 2496 to | o 2690 | ✓ | ✓ | ✓ |
| B42 | 3400 to | o 3600 | ✓ | ✓ | ✓ |
| B43 | 3600 to | o 3800 | ✓ | ✓ | ✓ |
| B45 | 1447 to | o 1467 | ✓ | ✓ | ✓ |
| B46 | 5150 to | o 5925 | ✓ | ✓ | ✓ |
| B47 | 5855 to | o 5925 | ✓ | ✓ | ✓ |
| B48 | 3550 to | | ✓ | ✓ | ✓ |
| B49 | 3550 to | | ✓ | ✓ | ✓ |
| B50 | 1432 to | | ✓ | ✓ | ✓ |
| B51 | 1427 to | | se . | ✓ | ✓ |
| B52 | 3300 to | | x. | ✓ | * |
| B53 | 2483.5 | | ✓ | 1 | ✓ |
| B65 | 1920 to 2010 | 2110 to 2200 | · / | 1 | ✓ |
| B66 | 1710 to 1780 | 2110 to 2200 2110 to 2200 | · | 1 | · / |
| B68 | 698 to 728 | 753 to 783 | · / | | → |
| | 2570 to | | · | - | · ✓ |
| B69 | | | · / | | → |
| B70 | 1695 to 1710 | 1995 to 2020 | | • | |
| B71 | 663 to 698 | 617 to 652 | √ | • | √ |
| B72 | 451 to 456 | 461 to 466 | * | * | * |
| B73 | 450 to 455 | 460 to 465 | * | * | * |
| B74 | 1427 to 1470 | 1475 to 1518 | √ | V | ✓ |
| B75 | 1432 to 1517 | | ✓ | ✓, | ✓. |
| B76 | 1427 to 1432 | | * | ✓ | ✓ |
| B77 | 3300 to 4200 | | ✓ | ✓ | ✓ |
| B78 | 3300 to | o 3800 | ✓ | ✓ | ✓ |
| B79 | 4400 to | o 5000 | ✓ | ✓ | ✓ |
| B85 | 698 to 716 | 728 to 746 | ✓ | ✓ | ✓ |
| B87 | 410 to 415 | 420 to 425 | * | * | * |
| | | | × | | * |




3. Antenna Characteristics

3.1 Return Loss

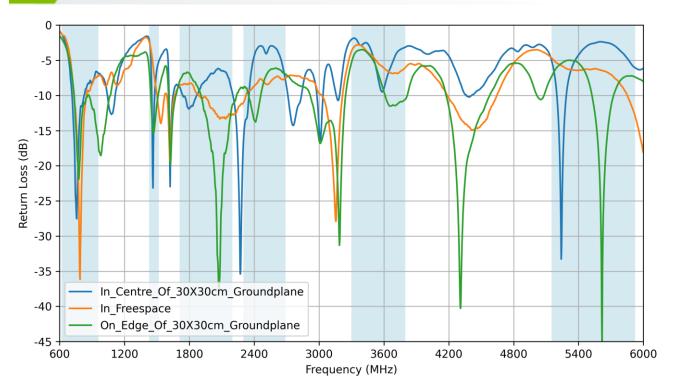


3.2 Efficiency

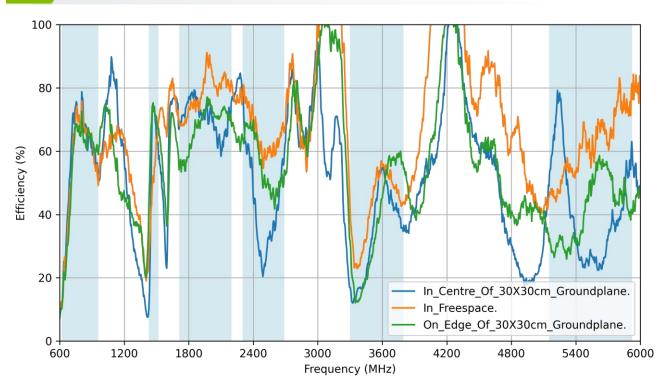




3.3 Average Gain

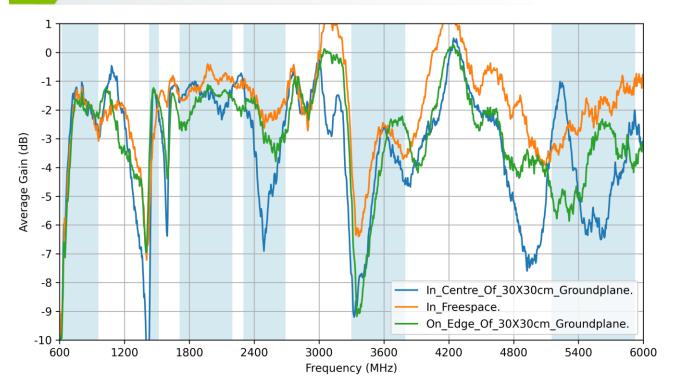


3.4 Peak Gain

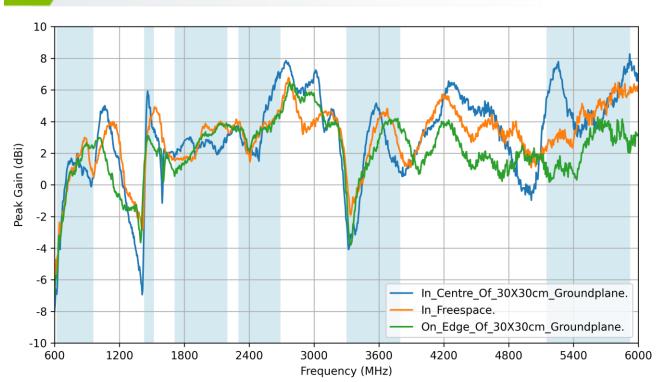




4. Radiation Patterns


4.1 Test Setup

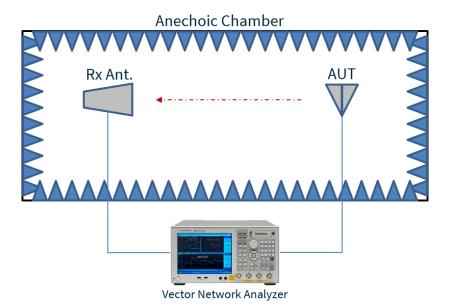


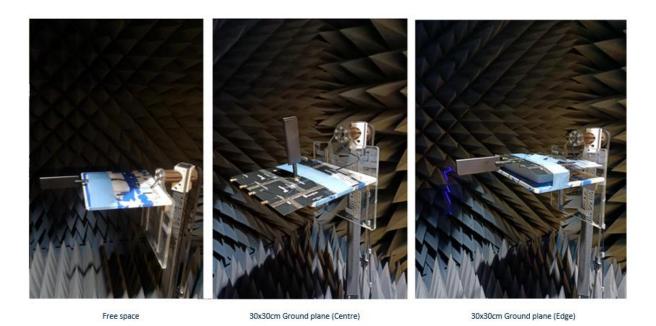




4.2 30x30cm Ground plane (Centre) - Patterns at 650 MHz

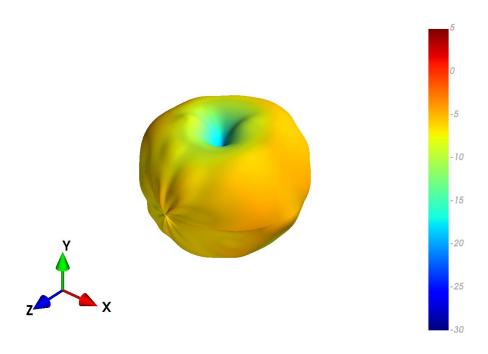


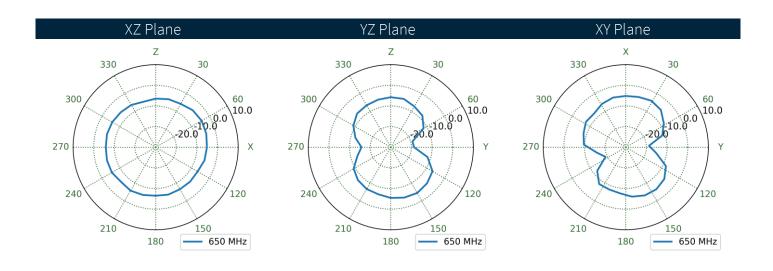




Free space - Patterns at 650 MHz

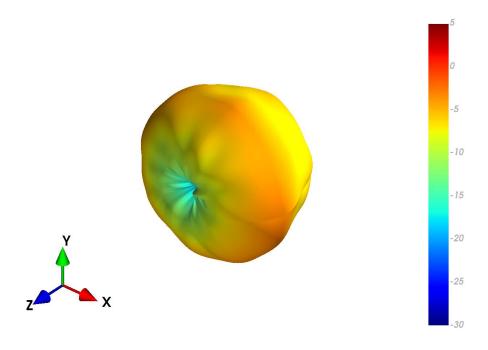


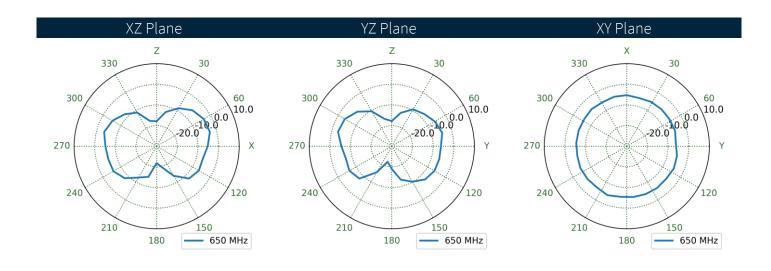




30x30cm Ground plane (Edge) - Patterns at 650 MHz

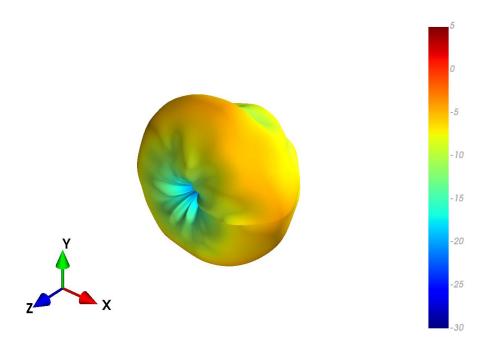


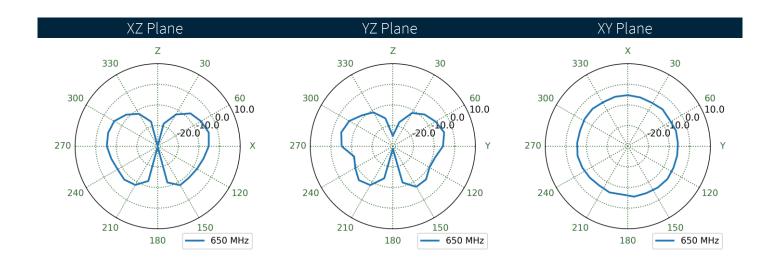




30x30cm Ground plane (Centre) - Patterns at 750 MHz

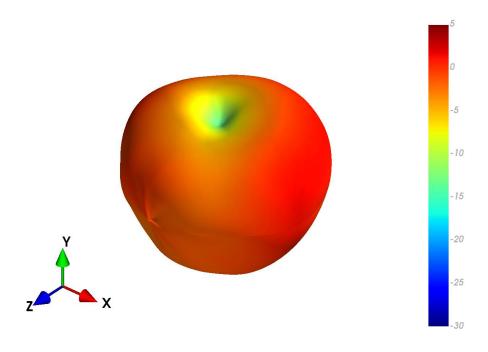


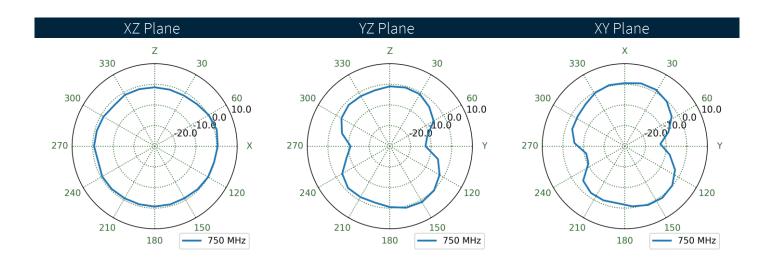




4.6 Free space - Patterns at 750 MHz

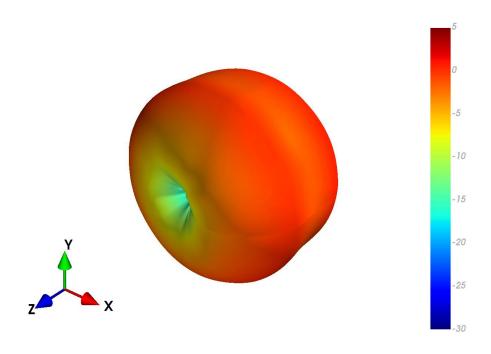


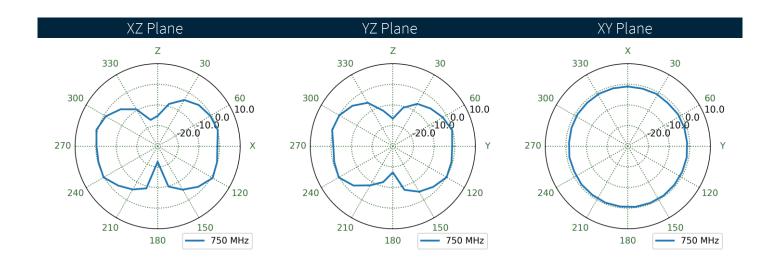




30x30cm Ground plane (Edge) - Patterns at 750 MHz

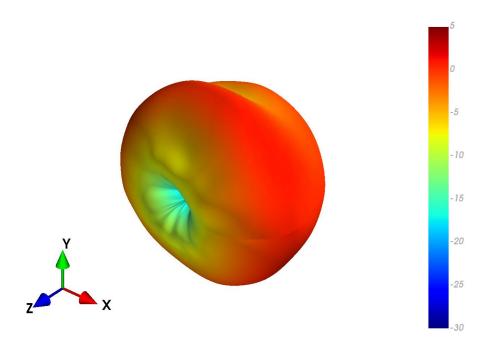


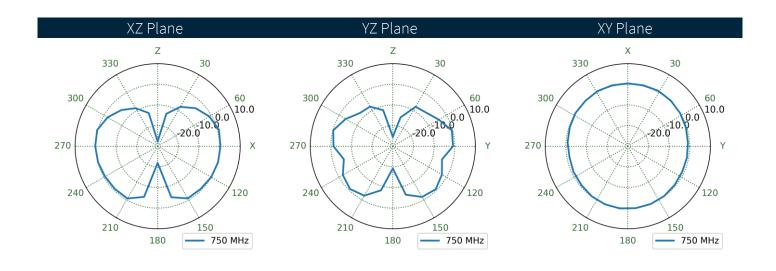




.8 30x30cm Ground plane (Centre) - Patterns at 890 MHz

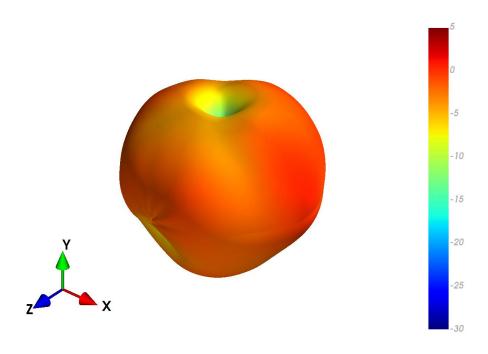


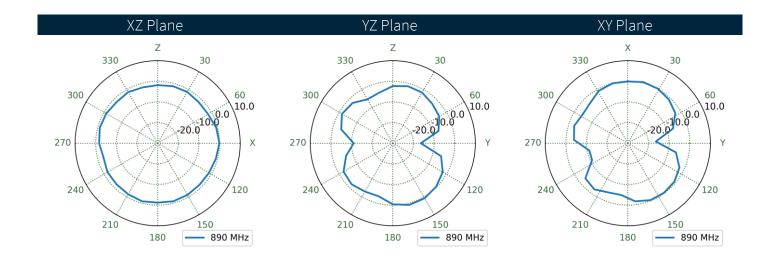




.9 Free space - Patterns at 890 MHz

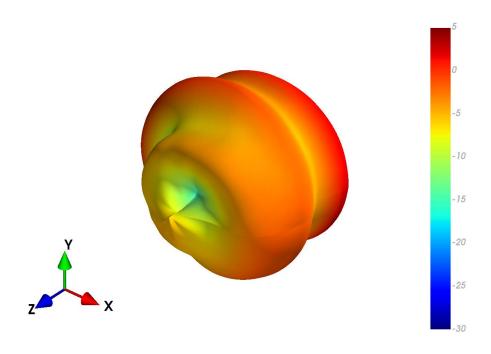


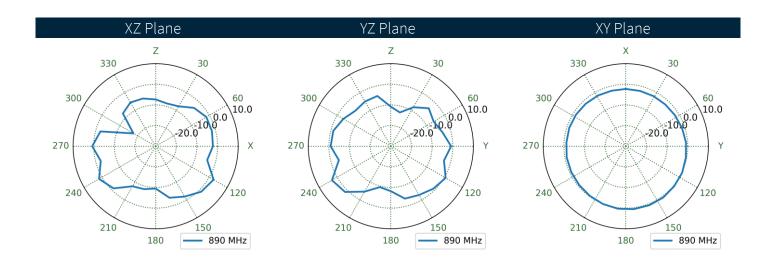




4.10 30x30cm Ground plane (Edge) - Patterns at 890 MHz

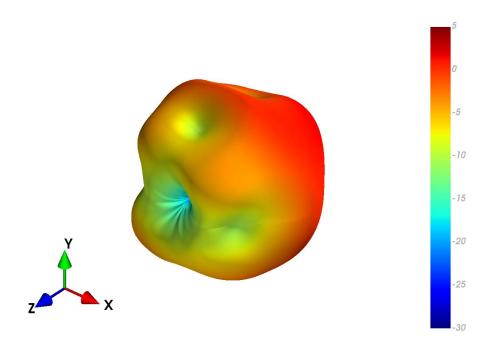


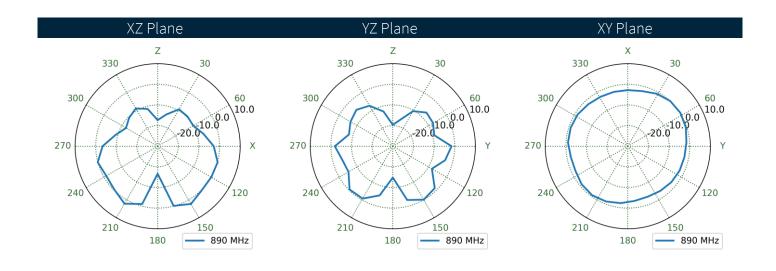




4.11 30x30cm Ground plane (Centre) - Patterns at 960 MHz

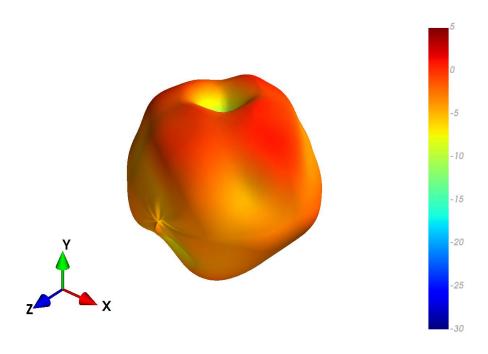


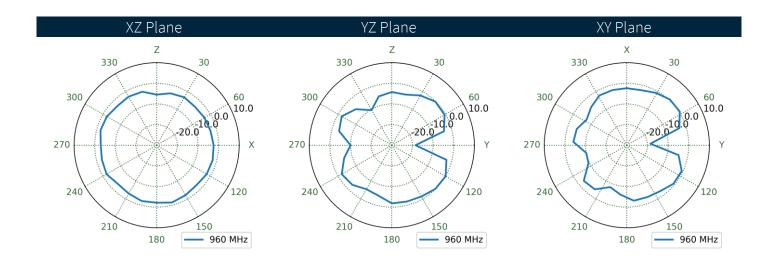




4.12 Free space - Patterns at 960 MHz

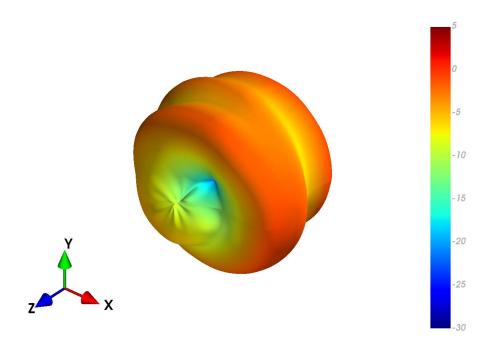


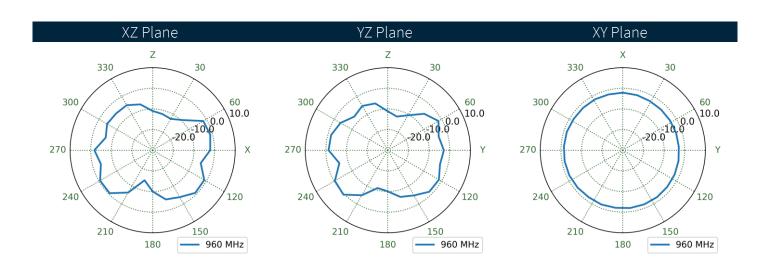




4.13 30x30cm Ground plane (Edge) - Patterns at 960 MHz

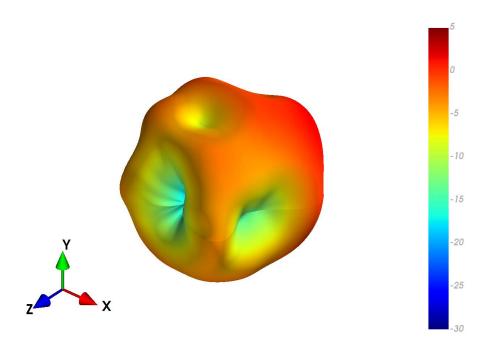


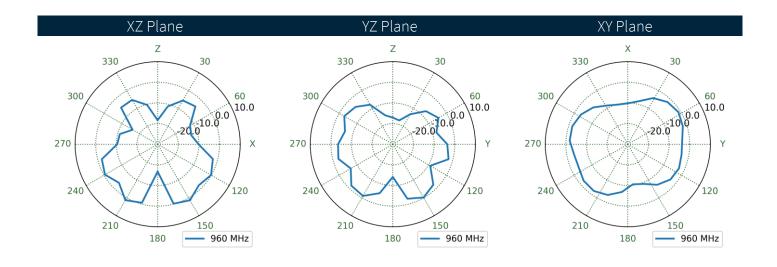




4.14 30x30cm Ground plane (Centre) - Patterns at 1470 MHz

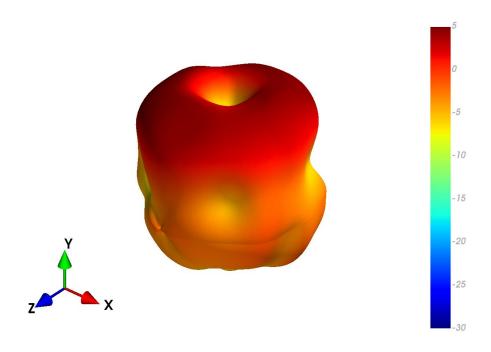


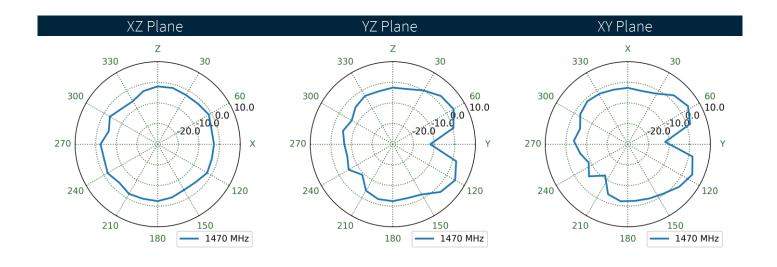




4.15 Free space - Patterns at 1470 MHz

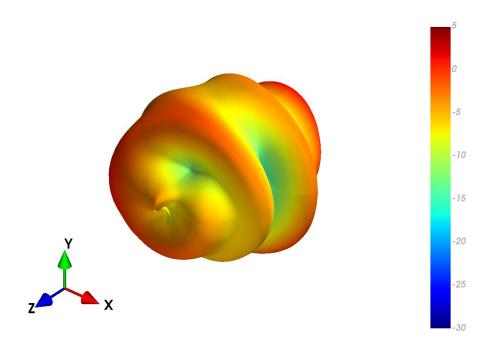


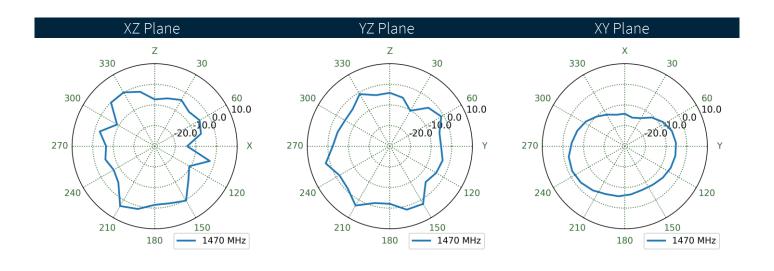




4.16 30x30cm Ground plane (Edge) - Patterns at 1470 MHz

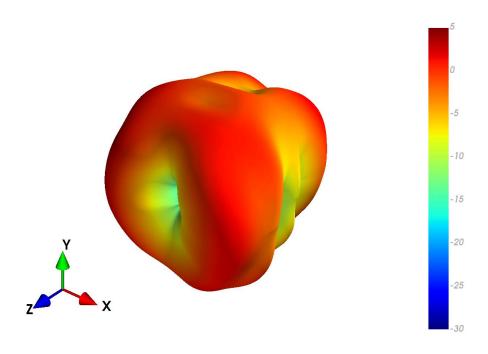


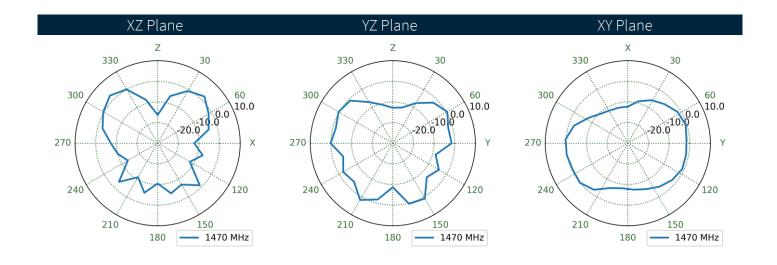




4.17 30x30cm Ground plane (Centre) - Patterns at 1805 MHz

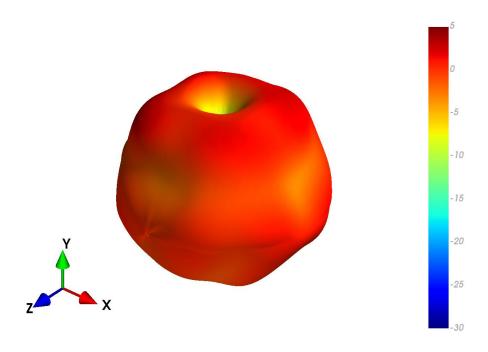


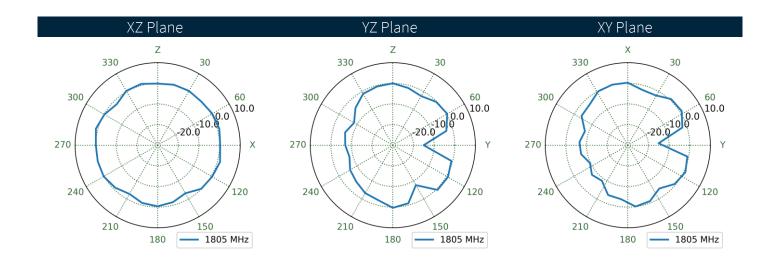




4.18 Free space - Patterns at 1805 MHz

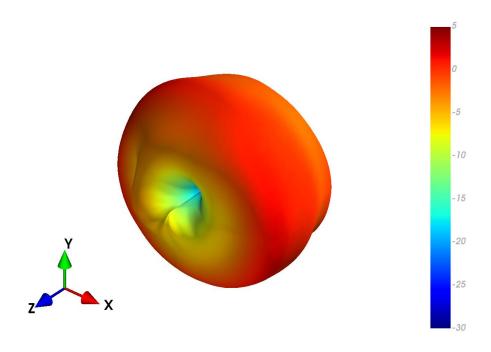


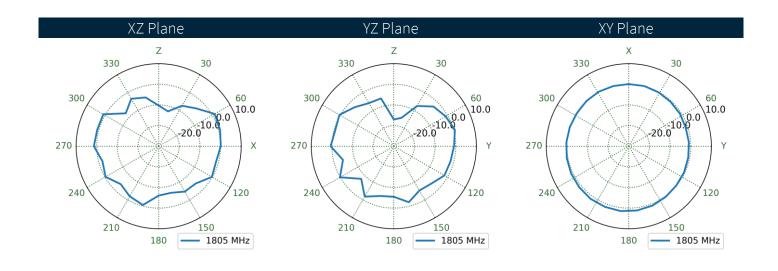




4.19 30x30cm Ground plane (Edge) - Patterns at 1805 MHz

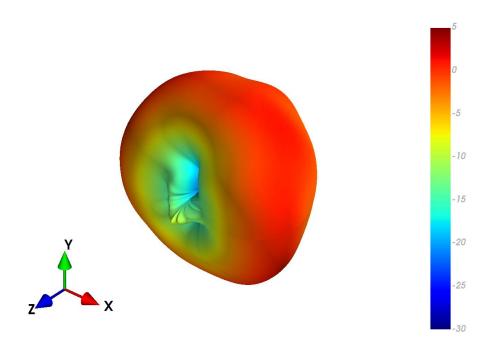


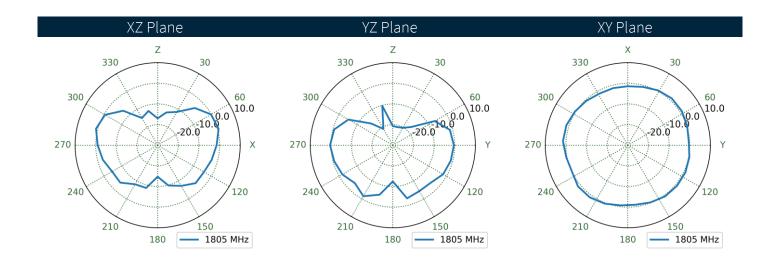




4.20 30x30cm Ground plane (Centre) - Patterns at 1920 MHz

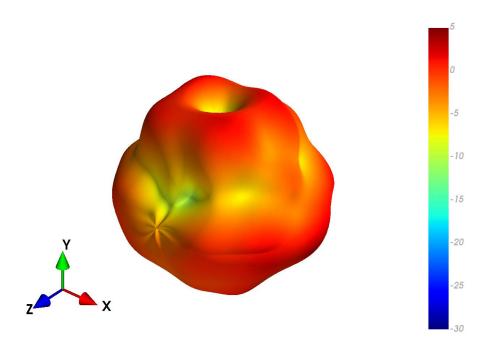


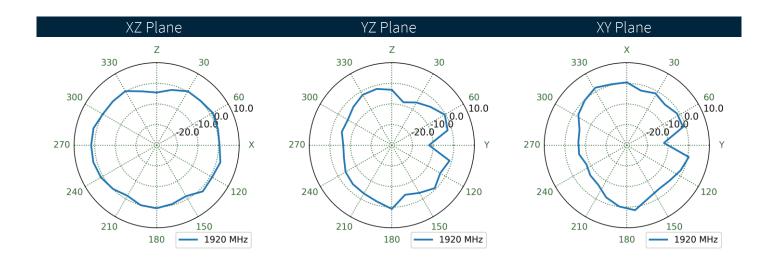




4.21 Free space - Patterns at 1920 MHz

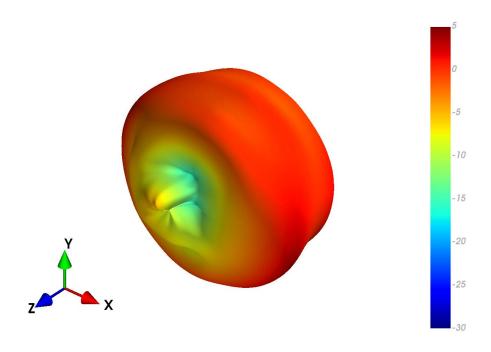


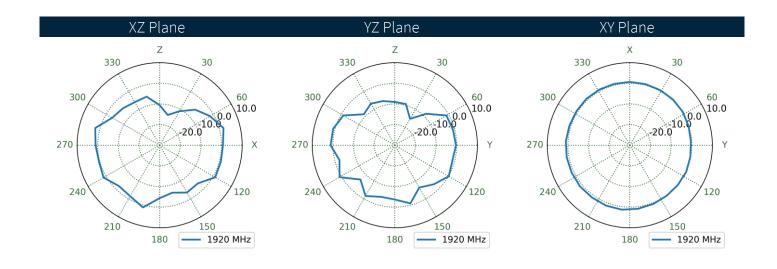




4.22 30x30cm Ground plane (Edge) - Patterns at 1920 MHz

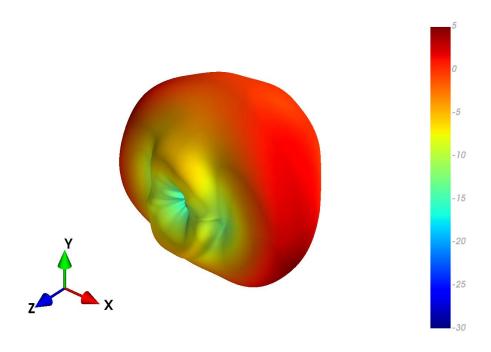


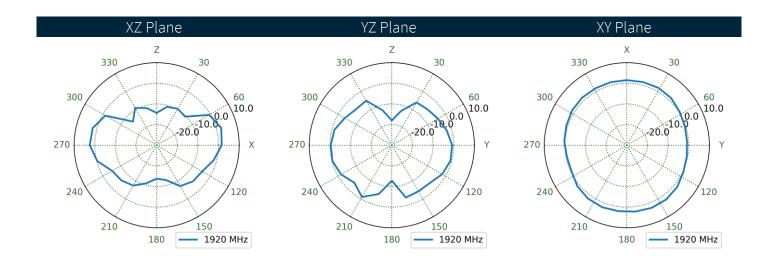




4.23 30x30cm Ground plane (Centre) - Patterns at 2595 MHz

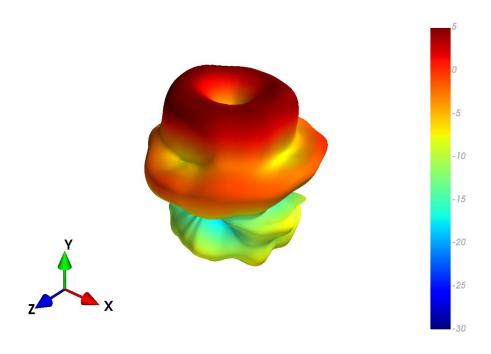


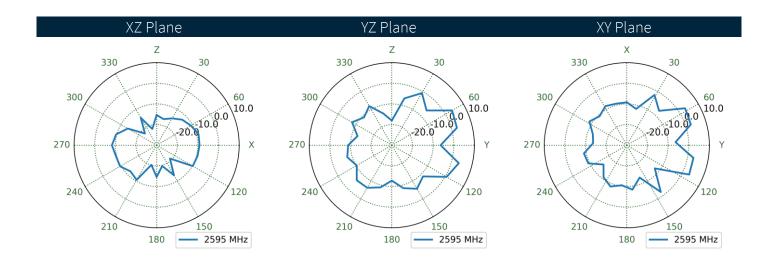




4.24 Free space - Patterns at 2595 MHz

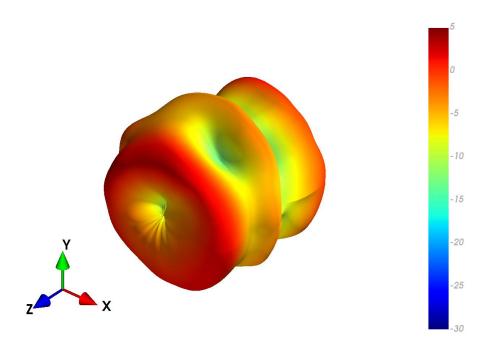


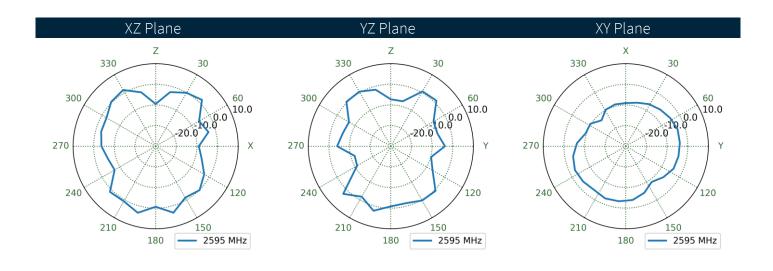




4.25 30x30cm Ground plane (Edge) - Patterns at 2595 MHz

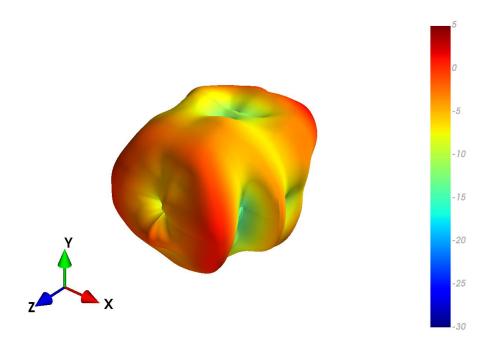


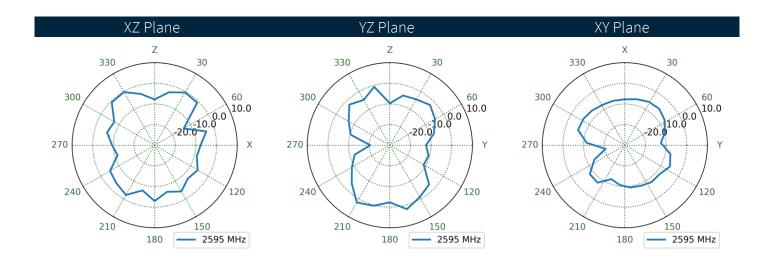



4.26 30x30cm Ground plane (Centre) - Patterns at 3500 MHz

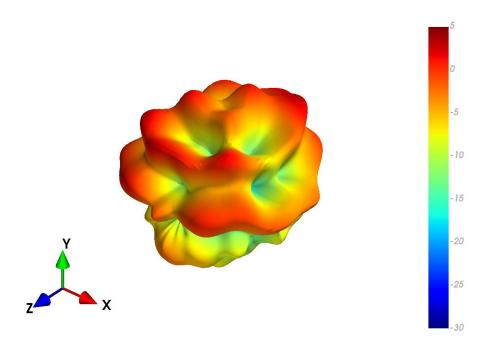


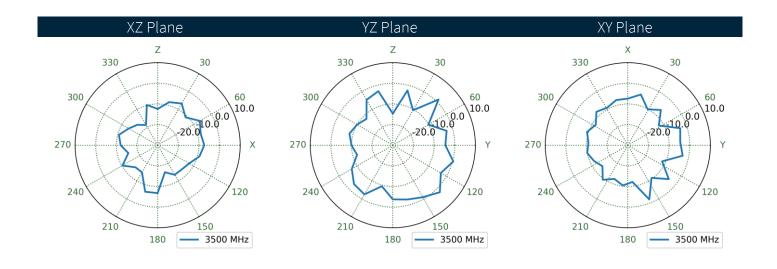




4.27 Free space - Patterns at 3500 MHz


SPE-12-8-119-I

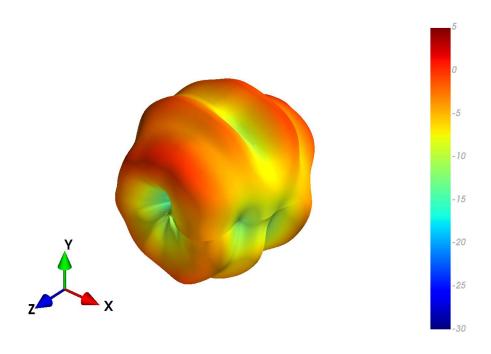


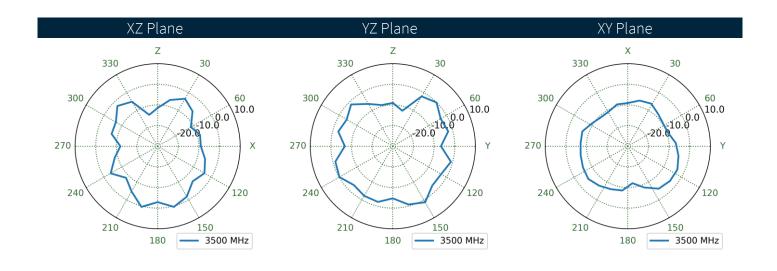




4.28 30x30cm Ground plane (Edge) - Patterns at 3500 MHz

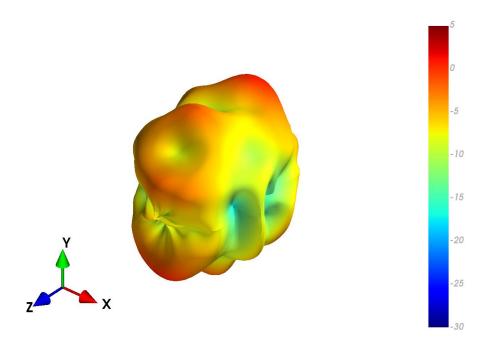


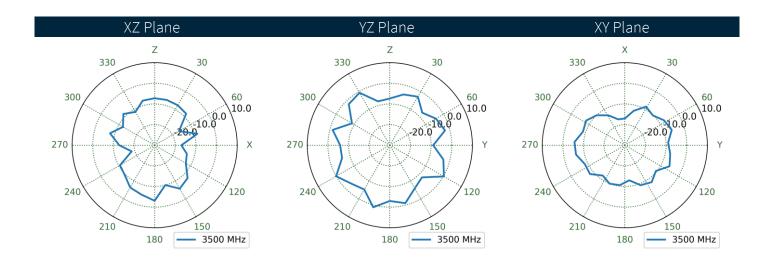




4.29 30x30cm Ground plane (Centre) - Patterns at 5150 MHz

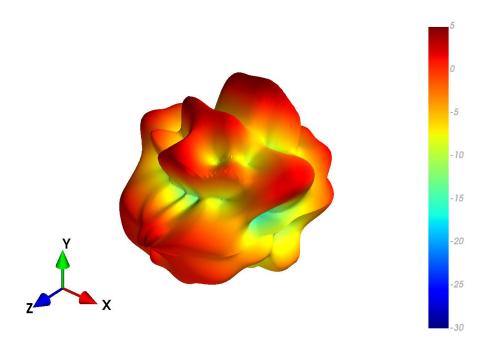


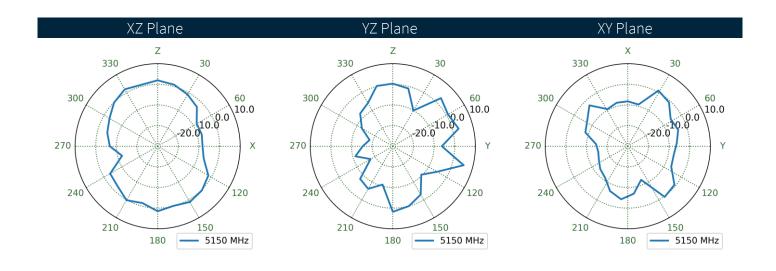




4.30 Free space - Patterns at 5150 MHz

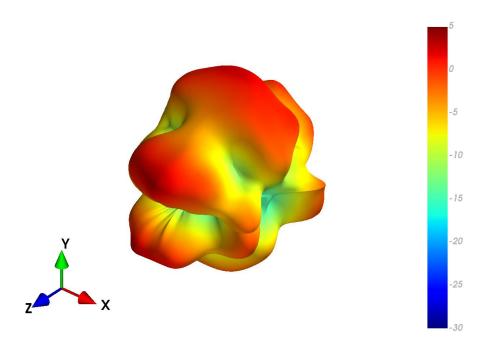


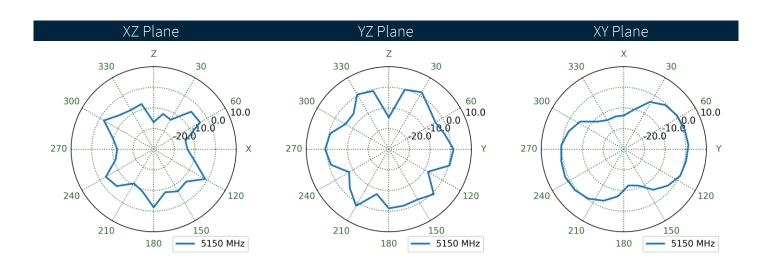




4.31 30x30cm Ground plane (Edge) - Patterns at 5150 MHz

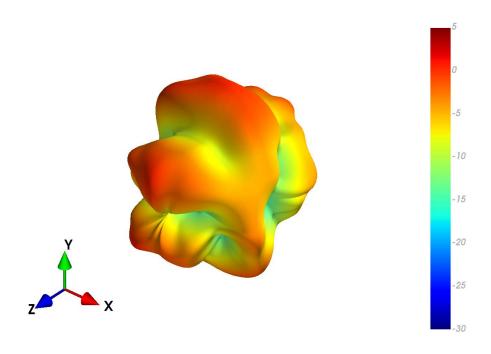


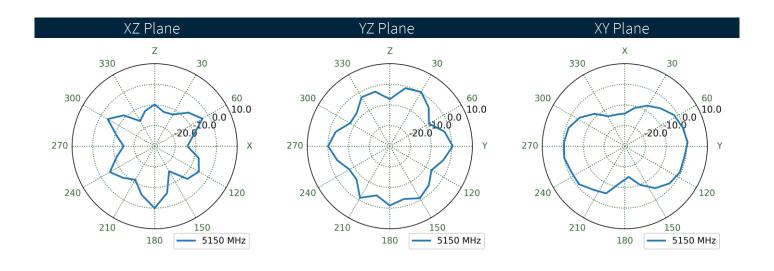




4.32 30x30cm Ground plane (Centre) - Patterns at 5550 MHz

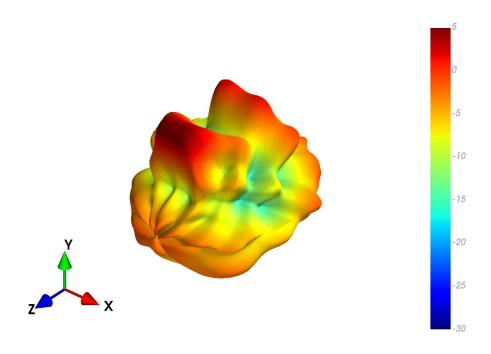


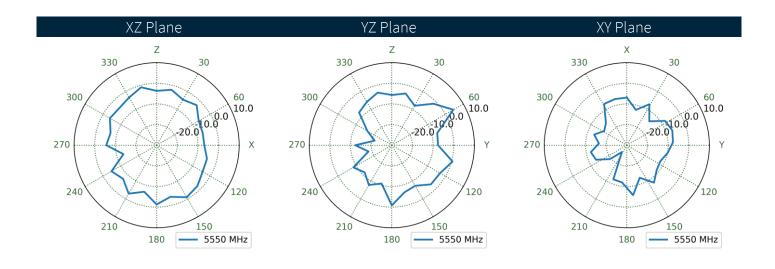




4.33 Free space - Patterns at 5550 MHz

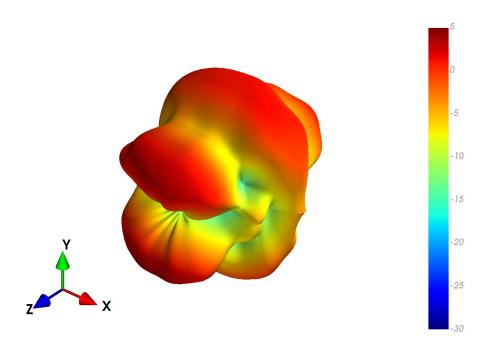


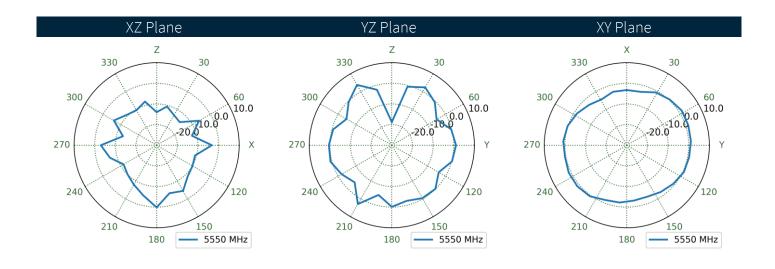




4.34 30x30cm Ground plane (Edge) - Patterns at 5550 MHz

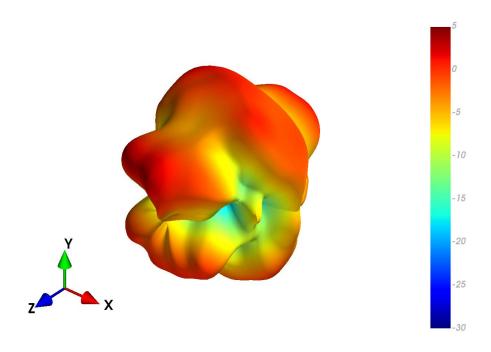

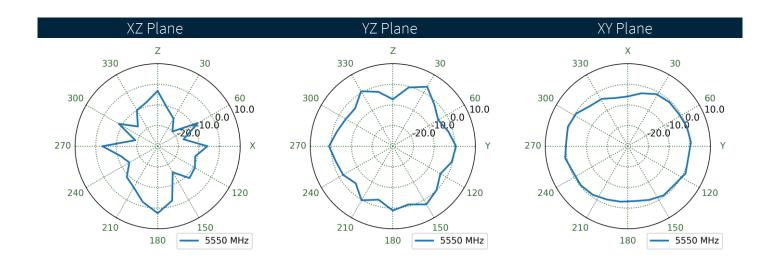



. Mechanical Drawing

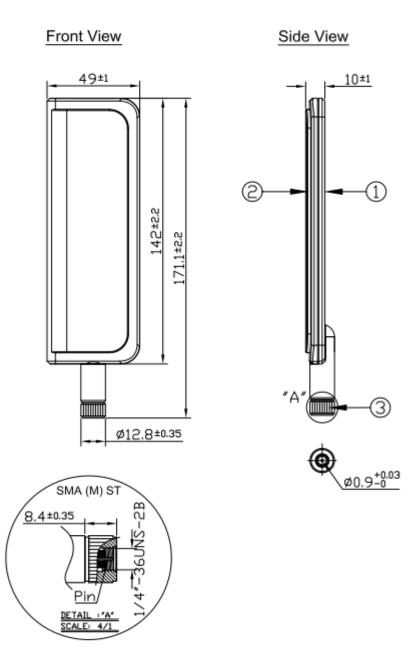




6. Packaging

1pc TG.30.8111W per Small PE Bag Small PE Bag Dimensions - 230*130mm Weight - 127g

50pcs TG.30.8111W per Large PE Bag Large PE Bag Dimensions - 395*338mm Weight - 6.35Kg

200pcs TG.30.8111W per carton Carton Dimensions - 315*380*290mm Weight - 6.5Kg

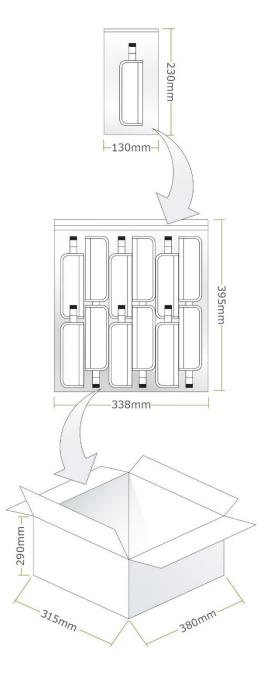



Changelog for the datasheet

SPE-12-8-119 - TG.30.0111W

| Revision: J (Current Version) | | |
|-------------------------------|--------------------|--|
| Date: | 2023-11-15 | |
| Changes: | Updated band table | |
| Changes Made by: | Cesar Sousa | |

Previous Revisions

| Revision: I | | | | |
|------------------|---|--|--|--|
| Date: | 2023-01-18 | | | |
| Changes: | Adding band 40 to spec table (full datasheet update). | | | |
| Changes Made by: | Gary West | | | |

| Revision: D | | | | |
|------------------|-----------------------------|--|--|--|
| Date: | 2017-03-30 | | | |
| Changes: | Updated Spec with LTE table | | | |
| Changes Made by: | Andy Mahoney | | | |

| Revision: H | | | | |
|------------------|------------------------|--|--|--|
| Date: | 2022-09-26 | | | |
| Changes: | Updated specifications | | | |
| Changes Made by: | Cesar Sousa | | | |

| Revision: C | | | | |
|------------------|------------------|--|--|--|
| Date: | 2017-01-13 | | | |
| Changes: | | | | |
| Changes Made by: | Technical Writer | | | |

| Revision: G | | | | |
|------------------|--|--|--|--|
| Date: | 2022-05-17 | | | |
| Changes: | Full datasheet template update and show data 600-6000. | | | |
| Changes Made by: | Gary West | | | |

| Revision: B | | | |
|------------------|------------------|--|--|
| Date: | 2012-10-02 | | |
| Changes: | | | |
| Changes Made by: | Technical Writer | | |

| Revision: F | |
|------------------|-------------------|
| Date: | 2018-11-30 |
| Changes: | Removed IP rating |
| Changes Made by: | Jack Conroy |

| Revision: A (Original First Release) | |
|--------------------------------------|------------------|
| Date: | 2012-09-19 |
| Notes: | |
| Author: | Technical Writer |

| Revision: E | |
|------------------|------------------|
| Date: | Unknown |
| Changes: | |
| Changes Made by: | Technical Writer |





www.taoglas.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

TG.30.8111W