



Apex IV

Part No: TG.46.8113

Description:

Apex IV Wideband 5G/4G Dipole Terminal Antenna 450MHz – 6000MHz with 90° Hinged SMA(M) Connector

Features:

Highest efficiency for 450-6000MHz wideband applications

Worldwide 5G/4G Coverage

Dipole Antenna Design – No Ground Plane Required

Hinged 90° Termination with SMA(M) Connector

Robust Metal Hinge Design for Improved Connection Reliability.

Dimensions: 218 * 58mm

RoHS & Reach Compliant



	1.	Introduction	3
	2.	Specifications	5
	3.	Antenna Characteristics	8
	4.	Radiation Patterns	11
	5.	Mechanical Drawing	68
	6.	Installation Recommendations	69
_	7.	Packaging	70
		Changelog	71

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.











1. Introduction



The Taoglas Apex IV TG.46.8113 is a wideband 5G/4G dipole antenna that has been designed to cover all sub 6GHz 5G/4G Cellular, ISM and Wi-Fi bands with frequencies in the 450 to 6000MHz spectrum. Evolved from the highly successful Apex range of products, the TG.46 has the highest wideband efficiency of any terminal antenna on the market today. Designed specifically for optimum performance on 5G NR bands between 3.3-4.2GHz, the TG.46 exhibits a uniform omnidirectional radiation pattern that allows for truly uninterrupted 360° 5G connection reliability. Additionally, the extended lower frequency coverage at 450MHZ (Band 31), makes the TG.46 ideal for a range of IoT applications, such as remote monitoring of smart utilities.

This attractive slim-line antenna is ground plane independent, meaning it does not need to be connected to the ground-plane of a device to radiate efficiently and neither is it in any way detuned by connecting to a ground-plane, thus avoiding a problem that is synonymous with smaller terminal mount antennas. The TG.46 includes an SMA(M) connector as standard, and the swivel mechanism that allows the antenna to be rotated to fit in tight environments and positioned for optimum performance. The 90° metal hinge structure has been designed so that when the antenna is mounted in a 90° position, it retains its position if used in environments prone to vibration.

The Apex IV has been primarily designed for use with wideband 5G/4G modules and devices that require the highest possible efficiency and peak gain to deliver best in class throughput on all major worldwide cellular bands for access points, terminals and routers. High efficiency is vital for applications



such as high speed video and real-time streaming or high capacity MIMO networks on public transportation. The Apex IV is backward compatible with 3G and 2G cellular applications such as HSPA, GSM, GPRS, UMTS, Wi-Fi and even has GPS included for Assisted GPS and/or E911 applications.

In summary, the Apex IV is the ideal solution for any device requiring high, reliable performance. It will meet most types of approval or carrier certification requirements from an efficiency standpoint. The antenna also makes an excellent reference antenna for test purposes. It has been designed as an omnidirectional antenna and the radiation patterns prove this, being stable across all bands. The connector type is customizable and the housing is also available in white. Contact your regional Taoglas customer support team for more information.





2. Specifications

				Electri	cal				
Band	Frequency (MHz)		Efficiency (%)	Average Gain	Peak Gain (dBi)	Impedance	Max Input Power	Polarization	Radiation Pattern
		Straight FS	46.4	-3.34	1.84				Omni-Directional
LTE 450	450~470	Bent FS	45.7	-3.40	0.96				
		Straight GP	43.6	-3.61	1.52				
		Bent GP	43.6	-3.61	1.27				
	617~698	Straight FS	63.7	-1.96	1.70				
5GNR/4G		Bent FS	76.2	-1.18	2.19				
Band 71		Straight GP	64.9	-1.87	2.21				
		Bent GP	71.0	-1.49	1.90				
		Straight FS	50.0	-3.01	1.70				
4G/3G	600~006	Bent FS	55.9	-2.53	2.12				
Band 12,13,14,17,28,29	698~806	Straight GP	48.4	-3.15	1.97				
		Bent GP	50.5	-2.96	1.26				
		Straight FS	36.7	-4.35	1.76				
4G/3G/NB-IoT/Cat M	924~060	Bent FS	49.8	-3.03	2.57	50 Ω		Linear	
Band 5,8,18,19,20,26,27	824~960	Straight GP	50.1	-3.01	3.12		10W		
		Bent GP	57.0	-2.44	3.87				
	1427~1518	Straight FS	69.1	-1.60	2.11				
5GNR/4G		Bent FS	77.9	-1.09	3.15				
Band 21,32,74,75,76		Straight GP	66.6	-1.77	2.31				
		Bent GP	66.7	-1.76	2.84				
	1710~2200	Straight FS	79.6	-0.99	3.98				
4G/3G		Bent FS	87.3	-0.59	4.90				
Band 1,2,3,4,9,23,25,35,39,66		Straight GP	75.1	-1.24	3.67				
		Bent GP	76.0	-1.19	4.43				
	2300~2690	Straight FS	69.9	-1.55	3.77				
4G/3G		Bent FS	77.9	-1.09	5.05				
Band 7,30,38,40,41		Straight GP	64.7	-1.89	4.24				
		Bent GP	66.1	-1.80	4.34				
	3300~4200	Straight FS	52.0	-2.84	4.36				
5GNR/4G		Bent FS	58.2	-2.35	4.52				
Band 22,42,48,77,78,79		Straight GP	48.2	-3.17	3.70				
		Bent GP	47.1	-3.27	4.20				
		Straight FS	56.7	-2.46	3.92				
LTE5200/	F1F0~F03F	Bent FS	61.1	-2.14	4.45				
Wi-Fi 5800	5150~5925	Straight GP	41.1	-3.86	4.29				
		Bent GP	40.8	-3.90	4.64				

*Test ground plane size: 150*90mm



	Mechanical				
Enclosure	UV Resistant PC/ABS				
Connector	SMA Male Hinged 90°				
Weight	75g				
Dimensions	218 * 58mm				
Recommended Torque for Mounting	0.9N·m				
Max torque for Mounting	1.176N·m				
Environmental					
Storage & Usage Temperature Range	-40°C to 85°C				
Humidity	Non-condensing 65°C 95% RH				




	5G/40	Bands	
Band No			VCDMA / HSPA / HSPA+ / TD-SCDMA
Dalla IV	Uplink	Downlink	Covered
B1	1920 to 1980	2110 to 2170	✓
B2	1850 to 1910	1930 to 1990	✓
В3	1710 to 1785	1805 to 1880	✓
В4	1710 to 1755	2110 to 2155	✓
B5	824 to 849	869 to 894	✓
B7	2500 to 2570	2620 to 2690	✓
В8	880 to 915	925 to 960	✓
B9*	1749.9 to 1784.9	1844.9 to 1879.9	✓
B11	1427.9 to 1447.9	1475.9 to 1495.9	✓
B12	699 to 716	729 to 746	✓
B13	777 to 787	746 to 756	✓
B14	788 to 798	758 to 768	✓
B17	704 to 716	734 to 746	✓
B18	815 to 830	860 to 875	✓
B19	830 to 845	875 to 890	✓
B20	832 to 862	791 to 821	✓
B21	1447.9 to 1462.9	1495.9 to 1510.9	✓
B22*	3410 to 3490	3510 to 3590	✓
B23*	2000 to 2020	2180 to 2200	✓
B24	1626.5 to 1660.5	1525 to 1559	✓
B25	1850 to 1915	1930 to 1995	✓
B26	814 to 849	859 to 894	✓
B27*	807 to 824	852 to 869	✓
B28	703 to 748	758 to 803	· ✓
B29		' to 728	· ✓
B30	2305 to 2315	2350 to 2360	√
B31	452.5 to 457.5	462.5 to 467.5	✓
B32		to 1496	✓
B34		to 2025	✓
B35	1850	√	
B36		to 1990	✓
B37	1910	✓	
B38	2570	✓	
B39	1880	✓	
B40	2300	✓	
B41	2496	✓	
B42		to 3600	✓
B43		to 3800	✓
B45	1447	✓	
B46	5150	✓	
B47	5855	✓	
B48	3550	✓	
B49		to 3700	✓
B50		to 1517	✓
B51		' to 1432	✓
B52		to 3400	✓
B53		5 to 2495	✓
B65	1920 to 2010	2110 to 2200	✓
B66	1710 to 1780	2110 to 2200	✓
B68	698 to 728	753 to 783	✓
B69		to 2620	✓
В70	1695 to 1710	1995 to 2020	✓
B71	663 to 698	617 to 652	✓
B72	451 to 456	461 to 466	✓
B73	450 to 455	460 to 465	✓
B74	1427 to 1470	1475 to 1518	✓
B75		to 1517	✓
B76		' to 1432	✓
B77		to 4200	✓
B78		to 3800	✓
B79		to 5000	✓
B85	698 to 716	728 to 746	✓
B87	410 to 415	420 to 425	*
B88	412 to 417	422 to 427	×




3. Antenna Characteristics

3.1 Return Loss

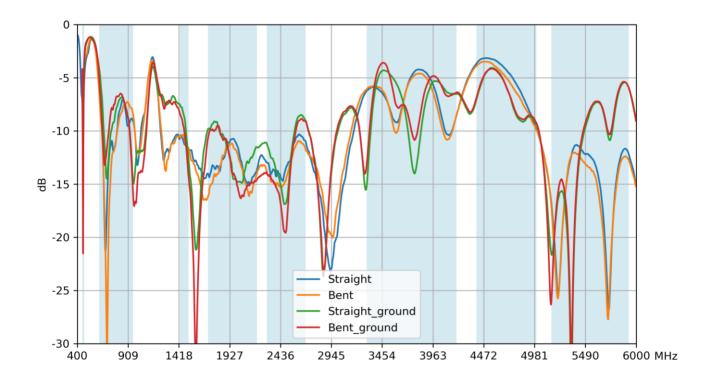


3.2 VSWR

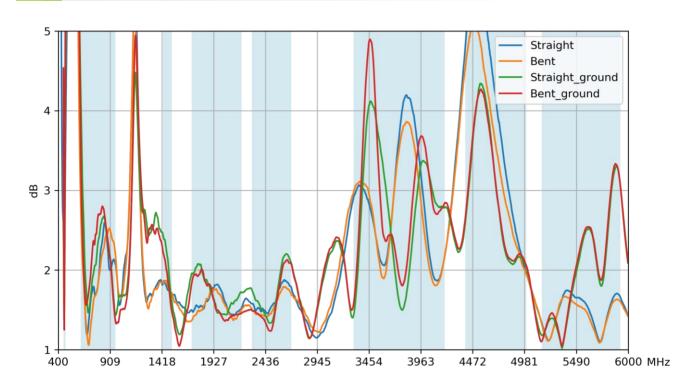




3.3 Efficiency

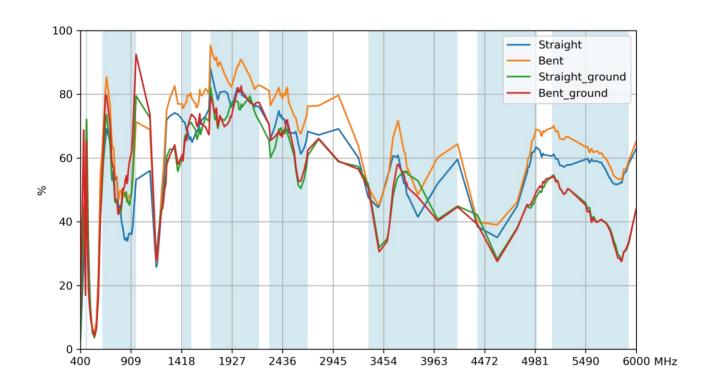


3.4 Peak Gain

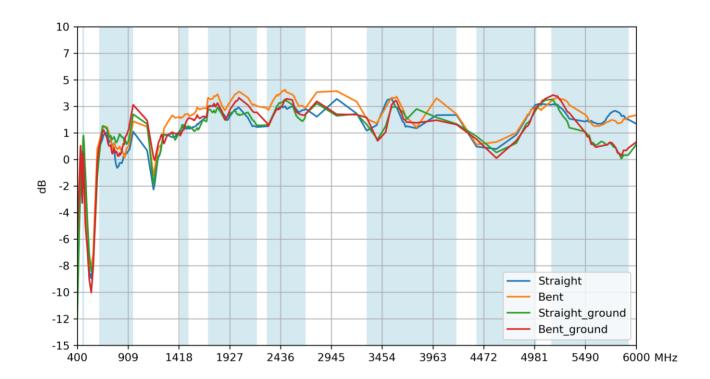




3.5 Average Gain

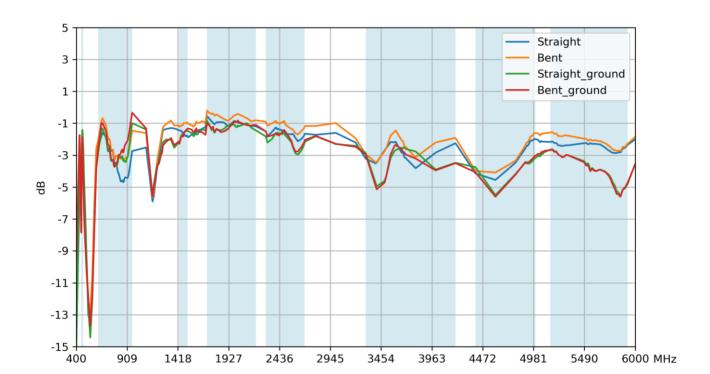





4. Radiation Patterns

4.1 Test Setup

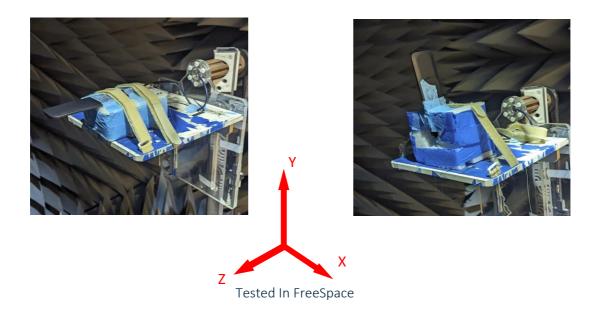






Tested on a 90x150mm GroundPlane




4.2

3D and 2D Radiation Patterns – Bent on Ground Plane

450MHz

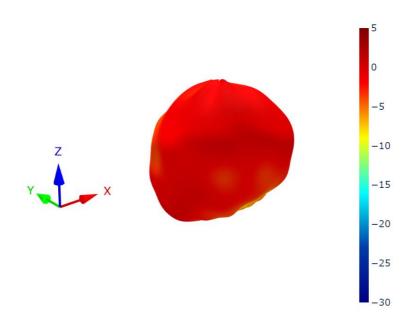

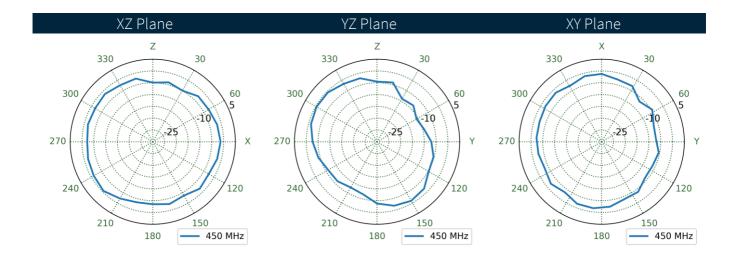





4.3

3D and 2D Radiation Patterns – Bent in Free Space

450MHz

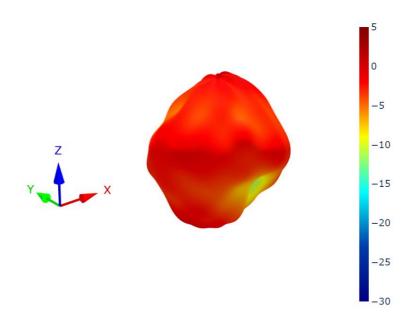

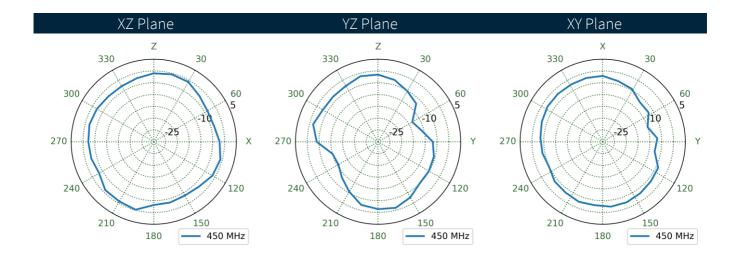





4.4

3D and 2D Radiation Patterns – Straight on Ground Plane

450MHz

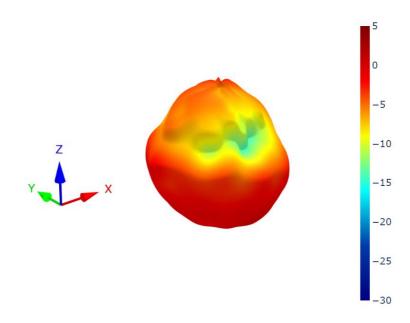

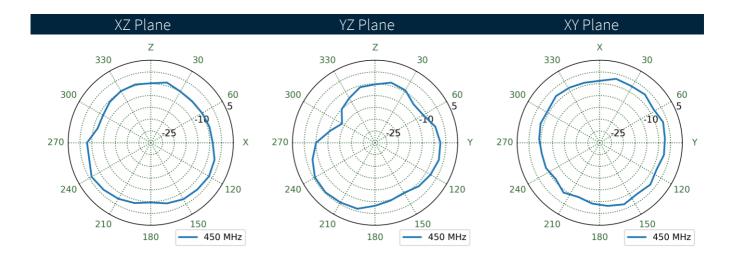





4.5

3D and 2D Radiation Patterns – Straight in Free Space

450MHz

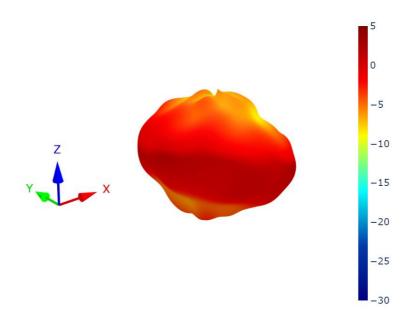

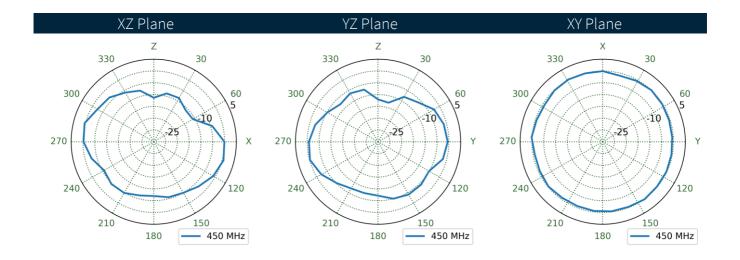





4.6

3D and 2D Radiation Patterns – Bent on Ground Plane

460MHz

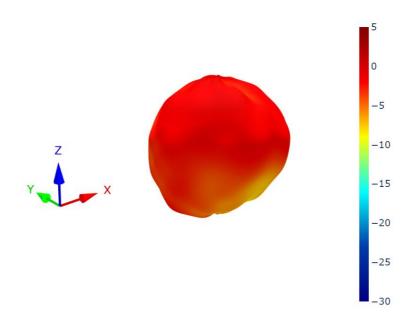

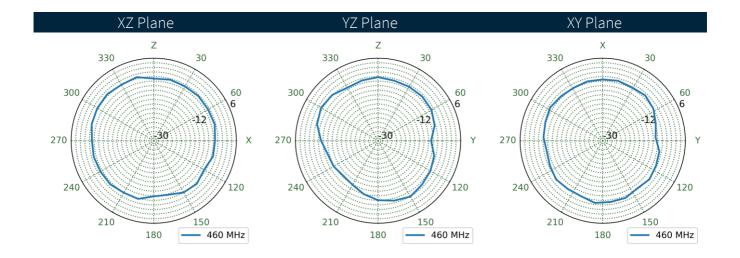





4.7

3D and 2D Radiation Patterns – Bent in Free Space

460MHz

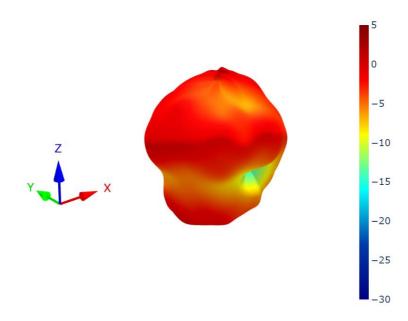

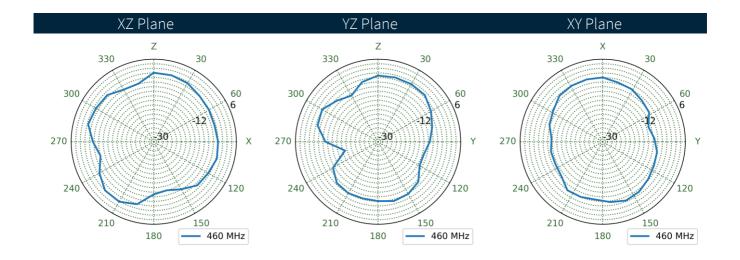





4.8

3D and 2D Radiation Patterns –Straight on Ground Plane

460MHz

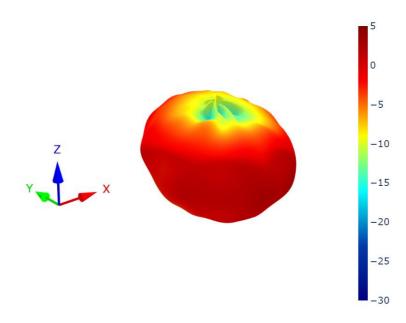

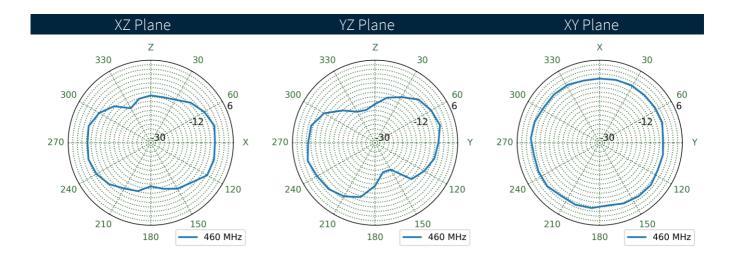





4.9

3D and 2D Radiation Patterns – Straight in Free Space

460MHz

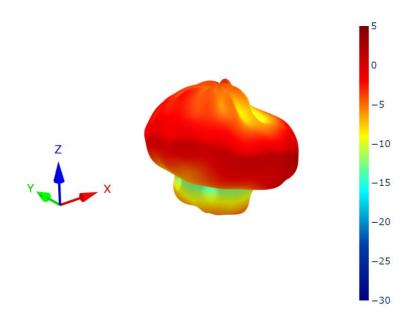

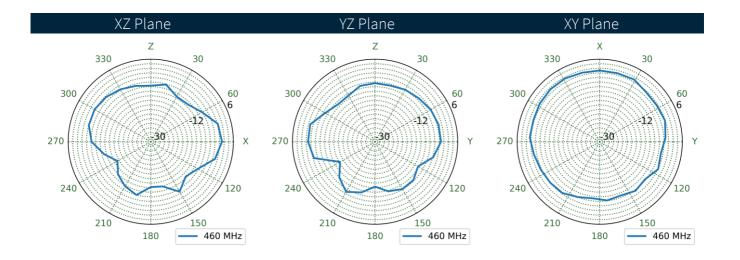





4.10

3D and 2D Radiation Patterns – Bent on Ground Plane

658MHz

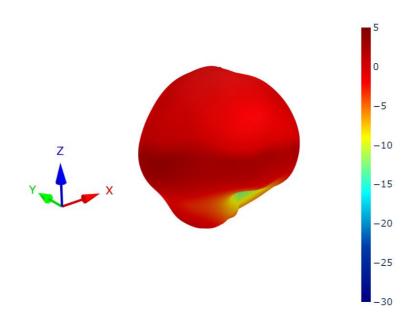


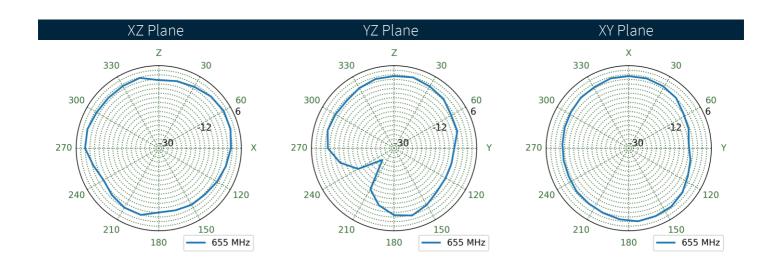




4.11 3D and 2D Radiation Patterns – Bent in Free Space

658MHz

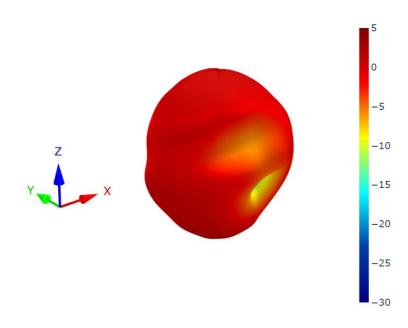


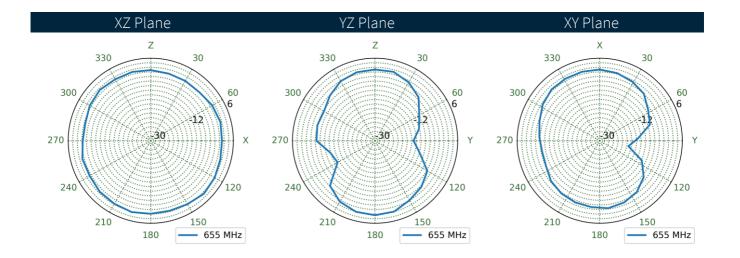




4.12 3D and 2D Radiation Patterns – Straight on Ground Plane

658MHz

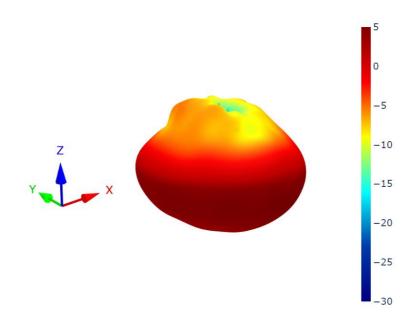


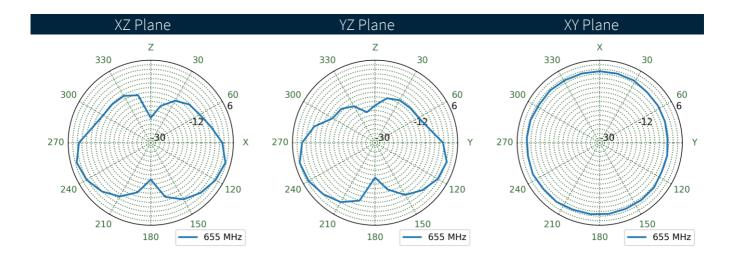




4.13 3D and 2D Radiation Patterns – Straight in Free Space

658MHz

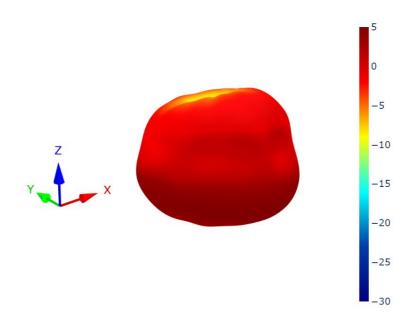


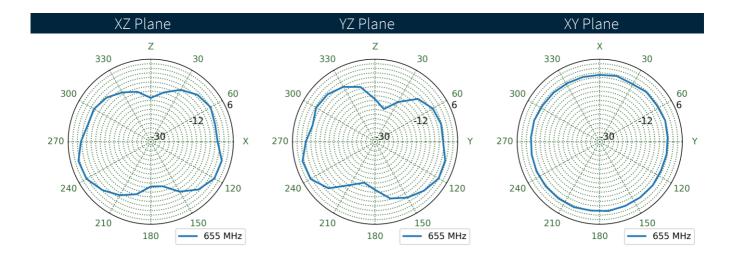




4.14 3D and 2D Radiation Patterns – Bent on Ground Plane

752MHz

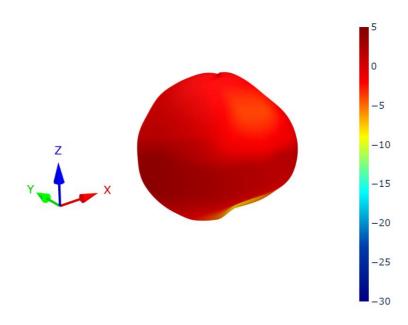


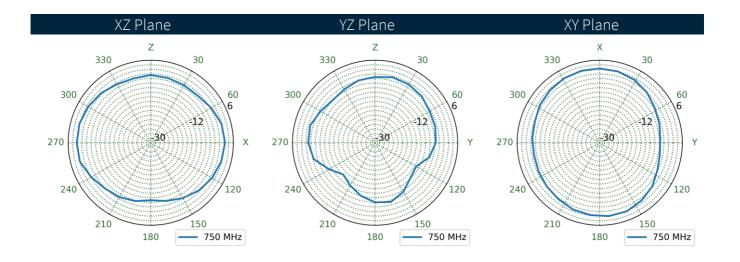




4.15 3D and 2D Radiation Patterns – Bent in Free Space

752MHz

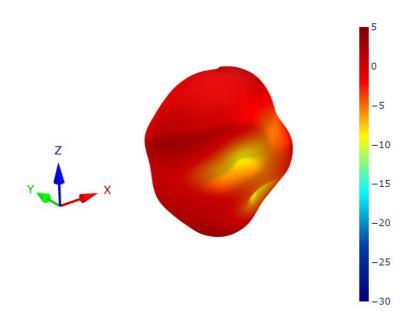

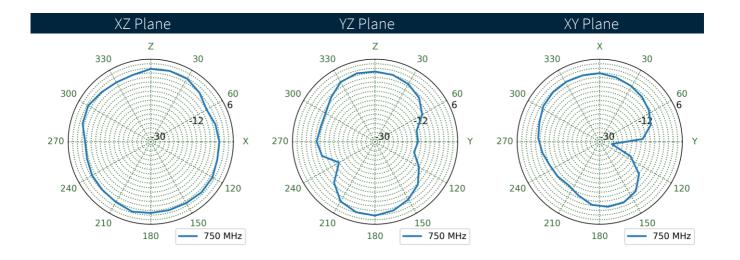





4.16

3D and 2D Radiation Patterns –Straight on Ground Plane

752MHz

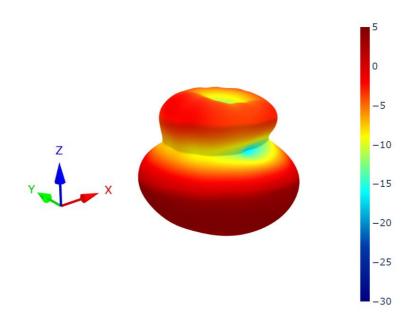

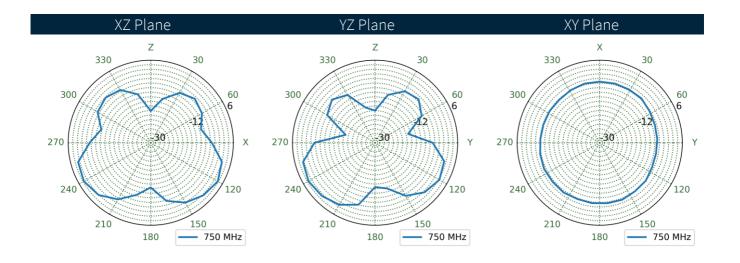



www.taoglas.com SPE-20-8-094-C



4.17 3D and 2D Radiation Patterns – Straight in Free Space

752MHz

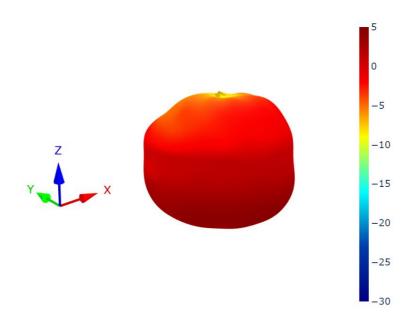


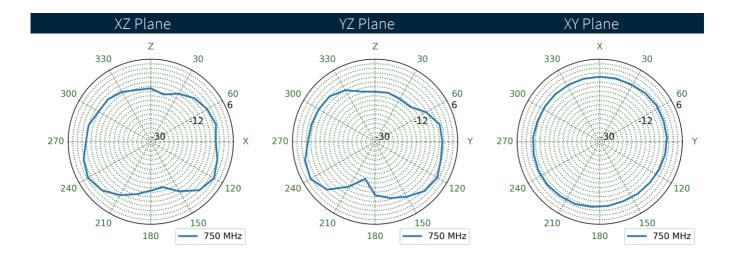




4.18 3D and 2D Radiation Patterns – Bent on Ground Plane

892MHz

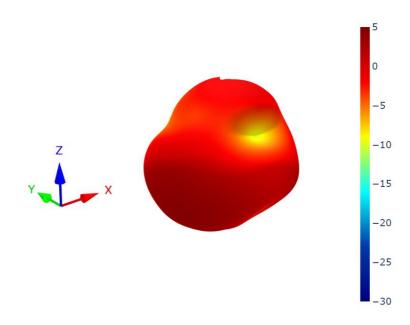

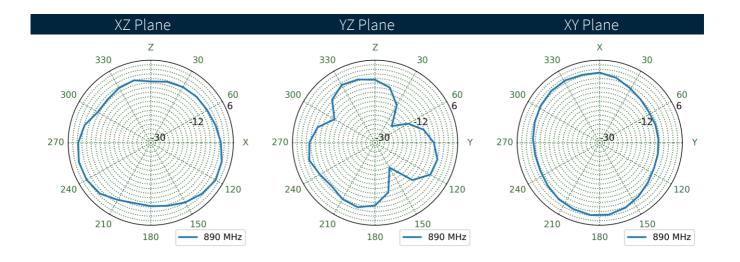





4.19 30

3D and 2D Radiation Patterns – Bent in Free Space

892MHz

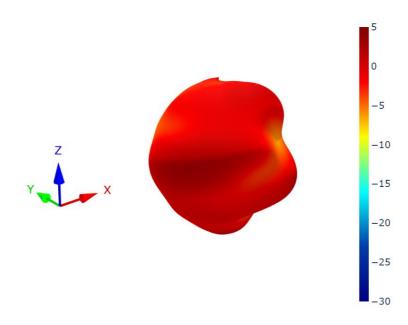

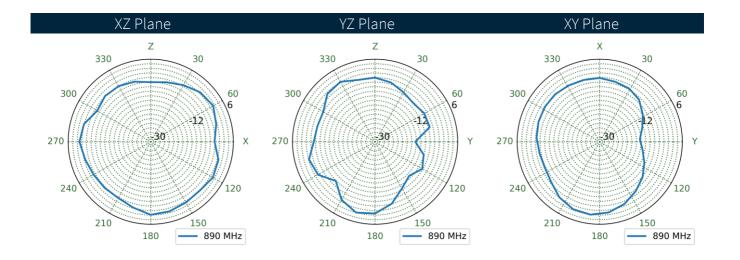





4.20

3D and 2D Radiation Patterns – Straight on Ground Plane

892MHz

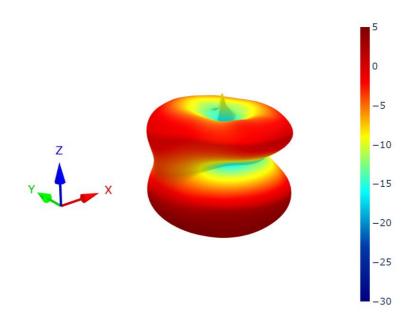


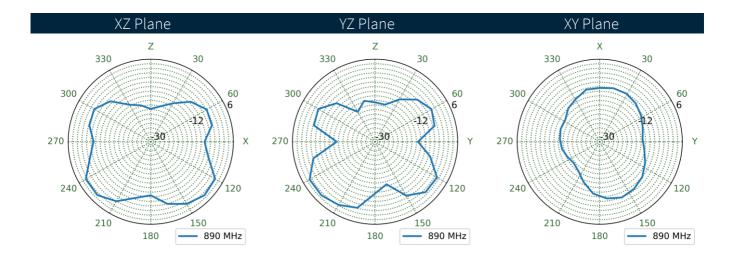




4.21 3D and 2D Radiation Patterns – Straight in Free Space

892MHz

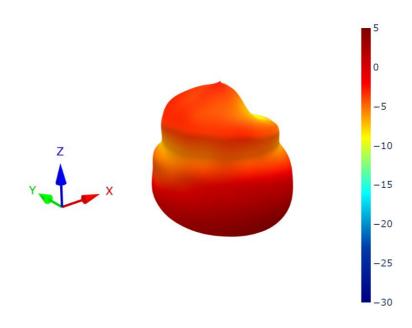


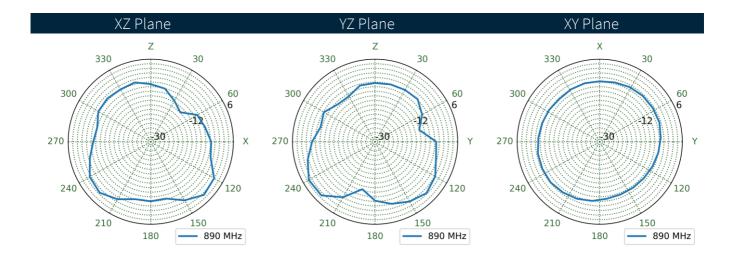




4.22 3D and 2D Radiation Patterns – Bent on Ground Plane

1473MHz

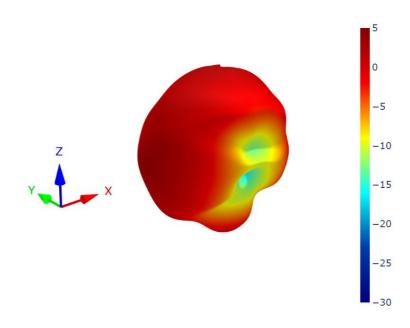

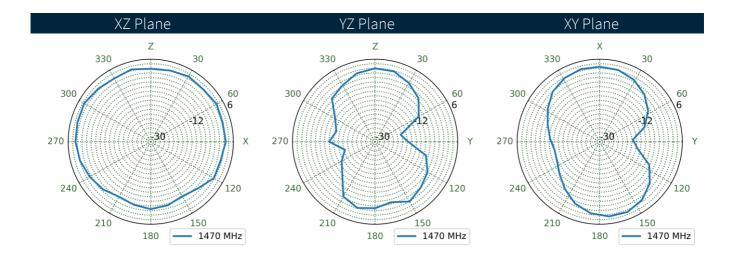





4.23

3D and 2D Radiation Patterns – Bent in Free Space

1473MHz

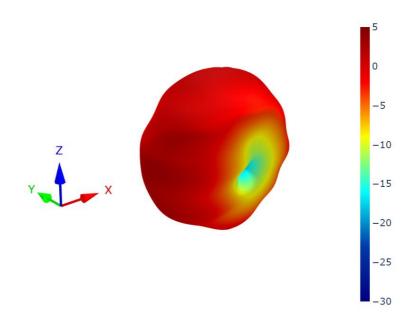

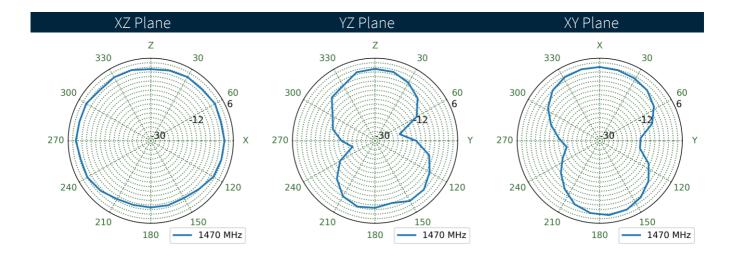





4.24

3D and 2D Radiation Patterns –Straight on Ground Plane

1473MHz

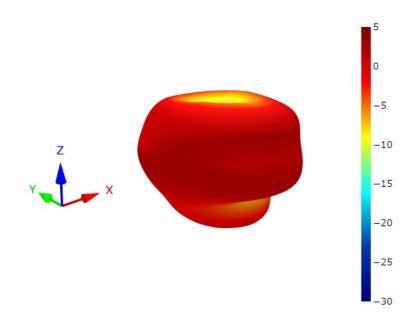


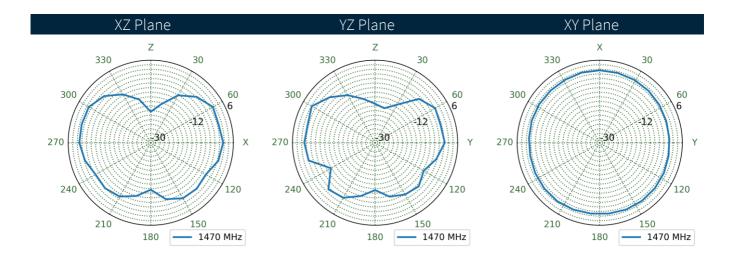




4.25 3D and 2D Radiation Patterns – Straight in Free Space

1473MHz

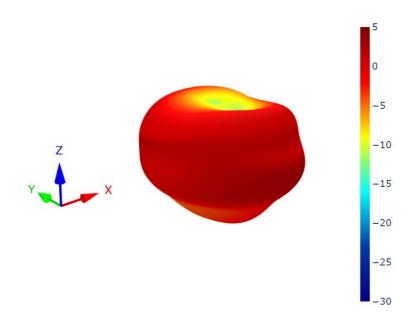

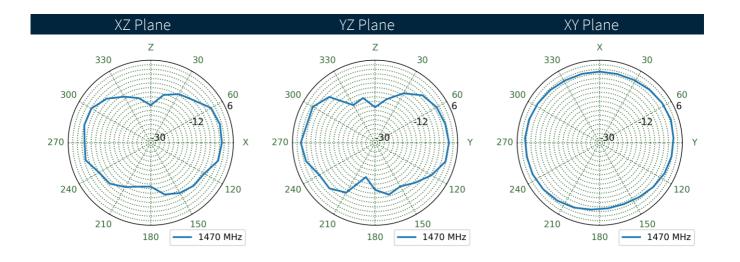





4.26

3D and 2D Radiation Patterns – Bent on Ground Plane

1582MHz

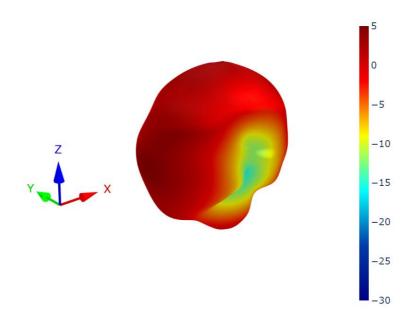

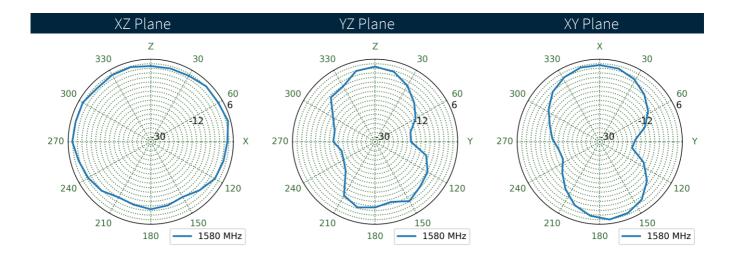





4.27

3D and 2D Radiation Patterns – Bent in Free Space

1582MHz

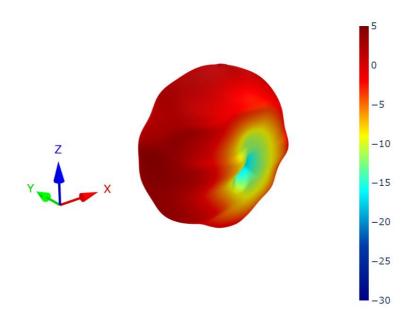

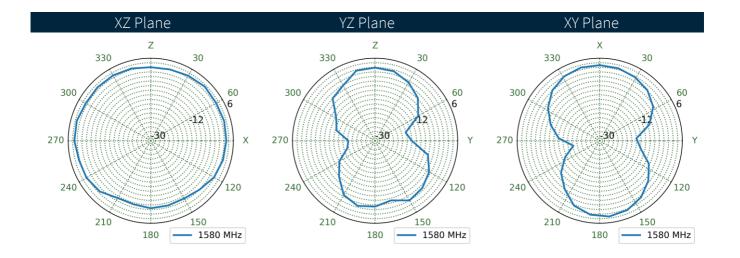





4.28

3D and 2D Radiation Patterns – Straight on Ground Plane

1582MHz

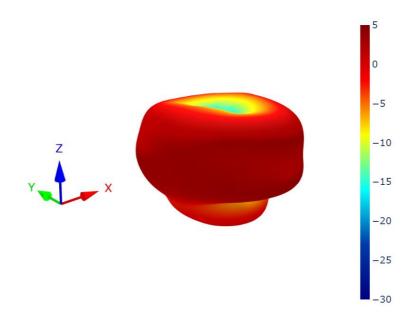

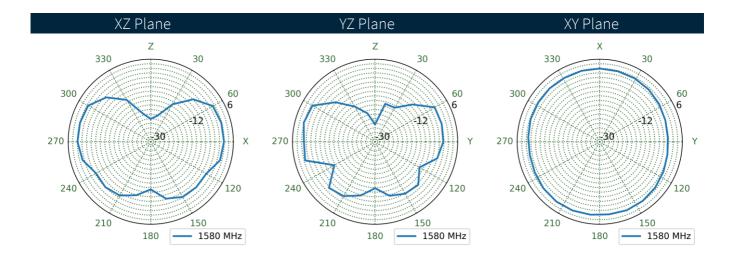





4.29

3D and 2D Radiation Patterns – Straight in Free Space

1582MHz

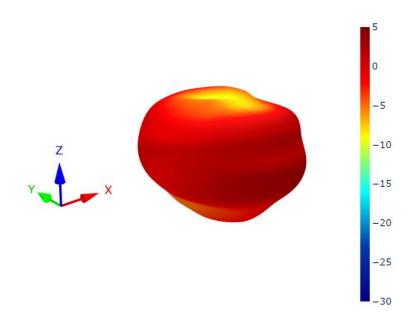

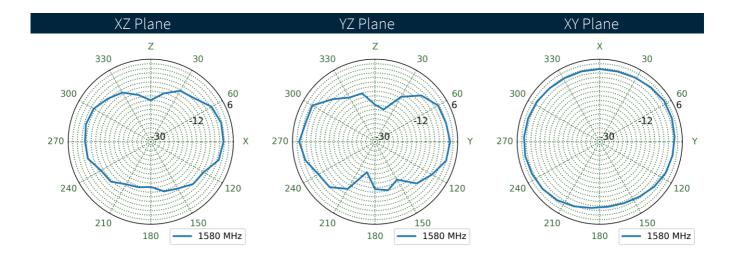





4.30

3D and 2D Radiation Patterns – Bent on Ground Plane

1795MHz

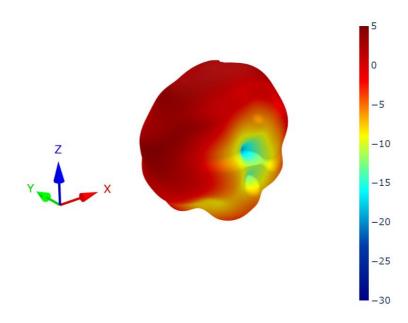

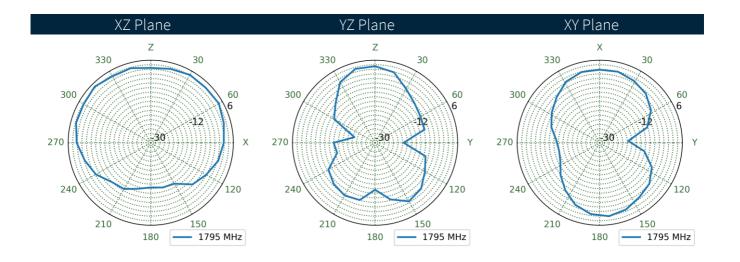





4.31

3D and 2D Radiation Patterns – Bent in Free Space

1795MHz

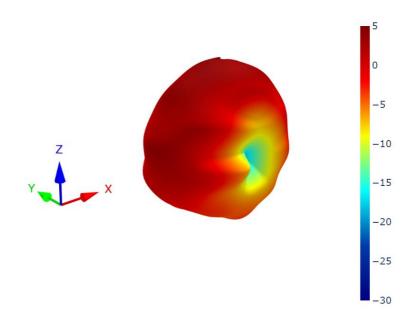


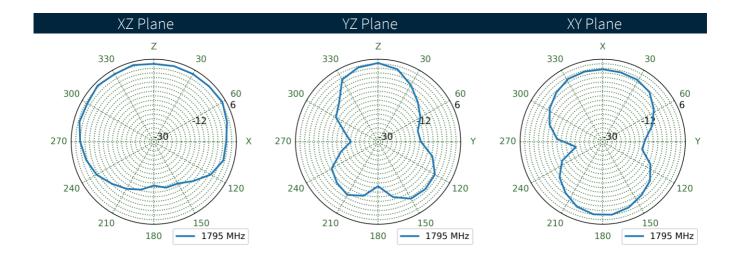




4.32 3D and 2D Radiation Patterns –Straight on Ground Plane

1795MHz

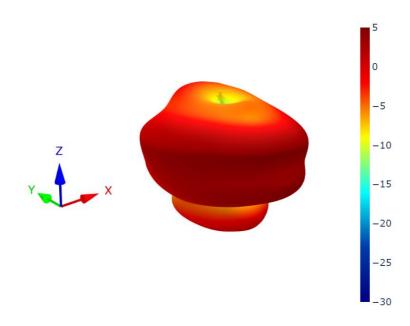


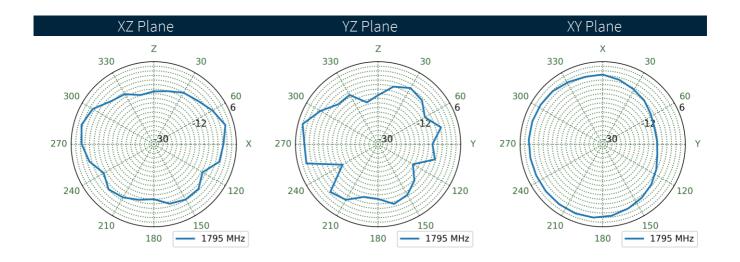




4.33 3D and 2D Radiation Patterns – Straight in Free Space

1795MHz

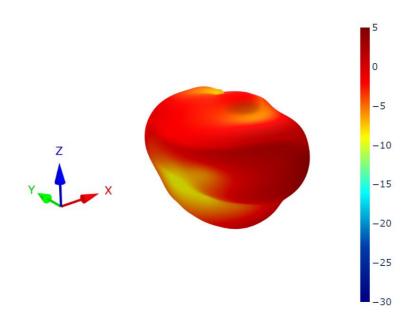

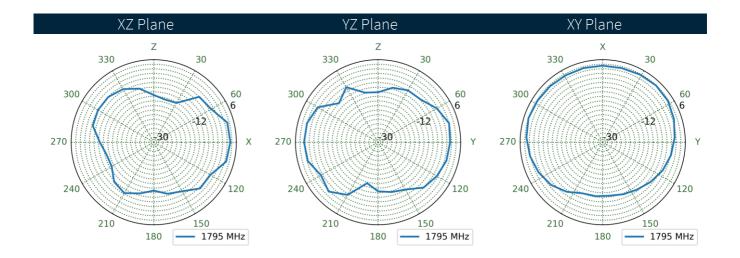





4.34

3D and 2D Radiation Patterns – Bent on Ground Plane

1920MHz

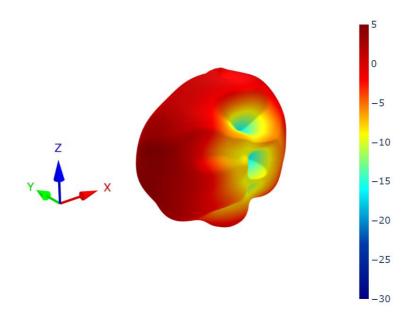


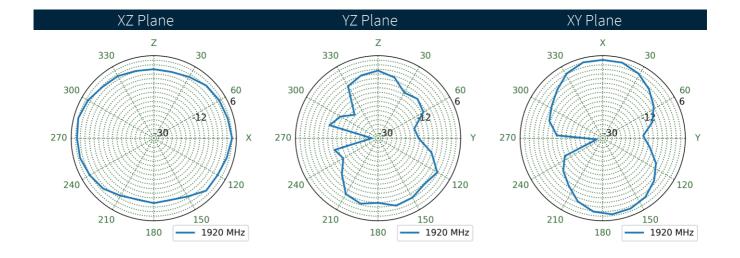




4.35 3D and 2D Radiation Patterns – Bent in Free Space

1920MHz

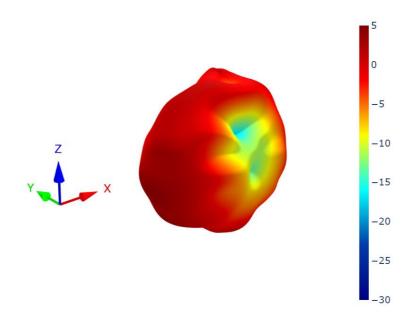


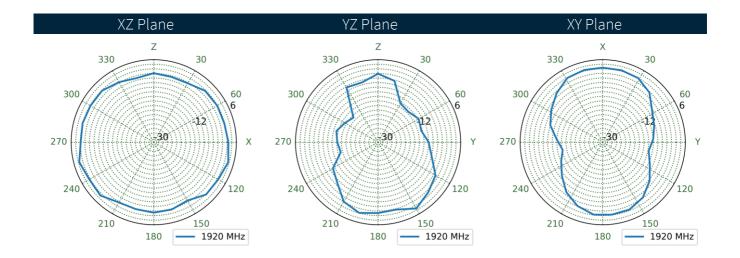




4.36 3D and 2D Radiation Patterns – Straight on Ground Plane

1920MHz

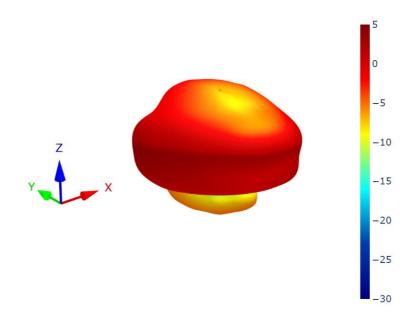


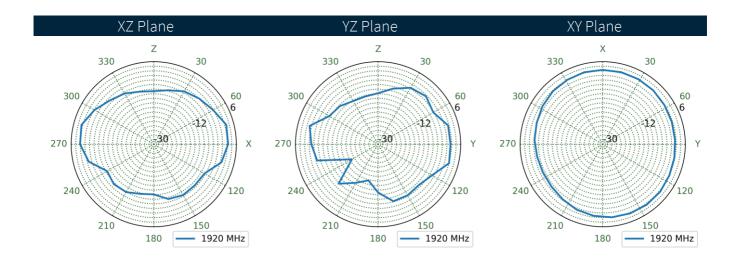




4.37 3D and 2D Radiation Patterns – Straight in Free Space

1920MHz

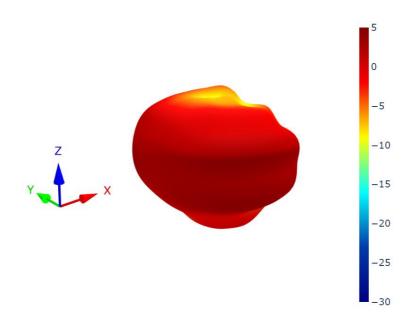

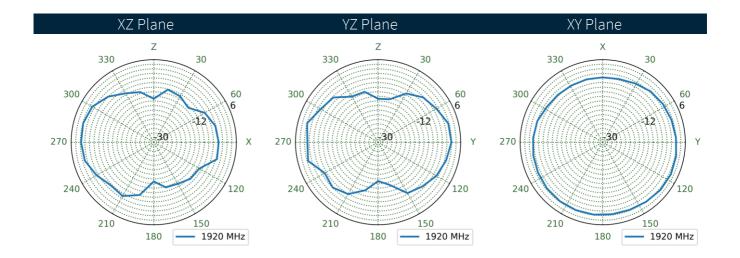





4.38

3D and 2D Radiation Patterns – Bent on Ground Plane

2045MHz

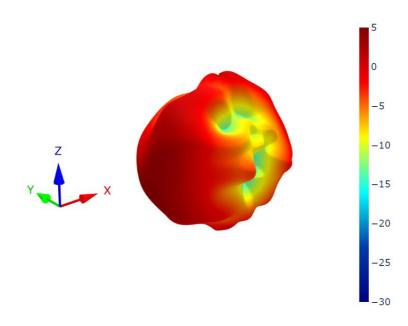

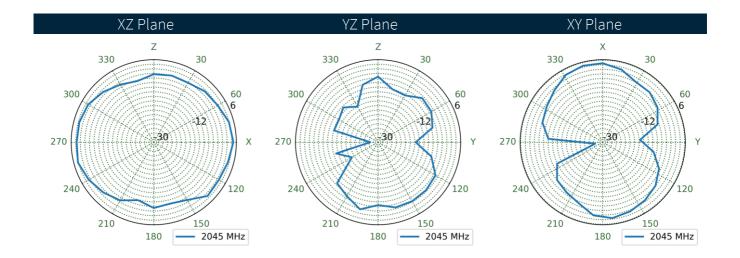





4.39

3D and 2D Radiation Patterns – Bent in Free Space

2045MHz

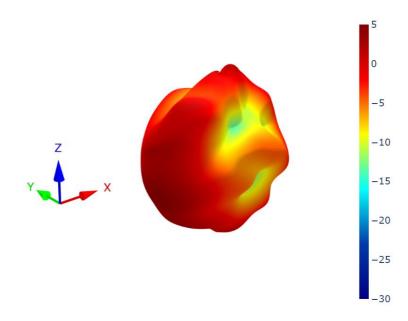

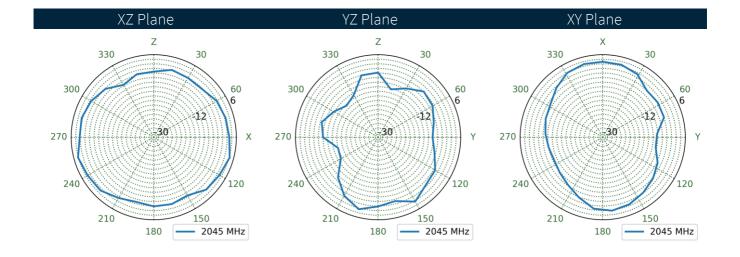





4.40

3D and 2D Radiation Patterns –Straight on Ground Plane

2045MHz

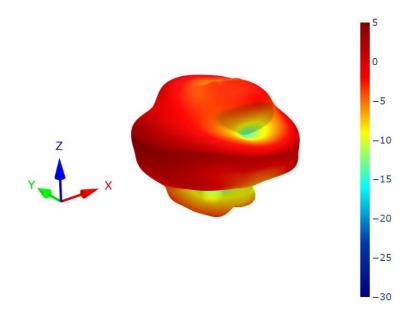


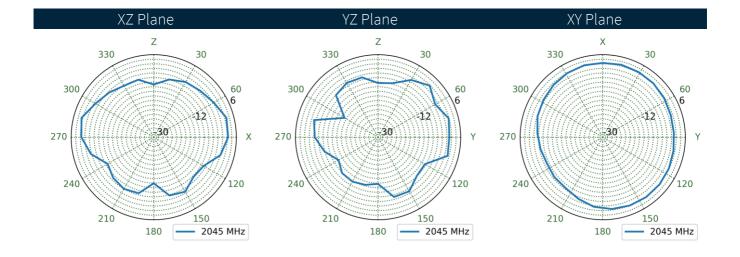




4.41 3D and 2D Radiation Patterns – Straight in Free Space

2045MHz

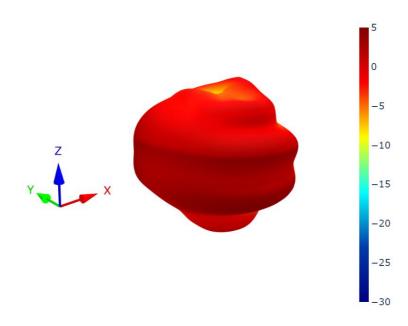

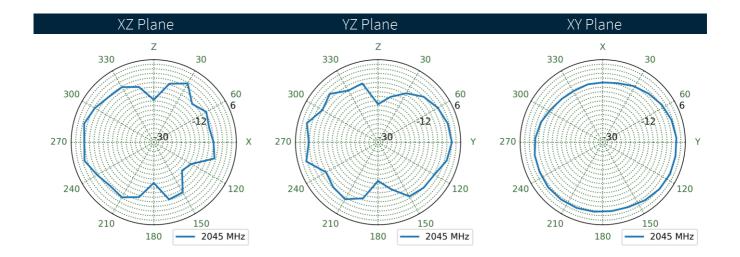





4.42 3D

3D and 2D Radiation Patterns – Bent on Ground Plane

2333MHz

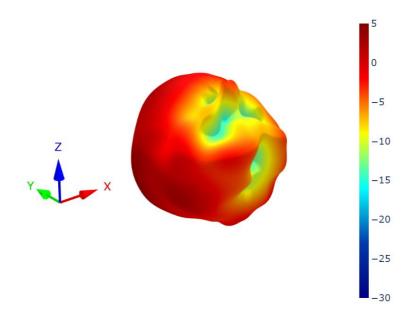

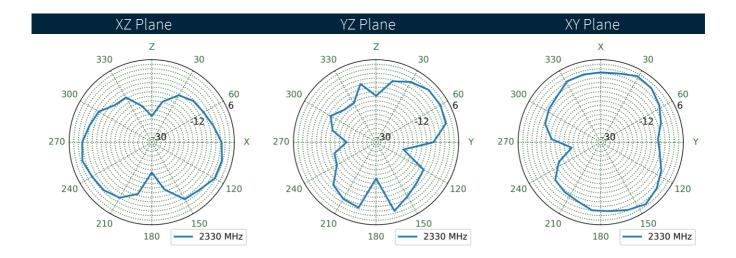





4.43

3D and 2D Radiation Patterns – Bent in Free Space

2333MHz

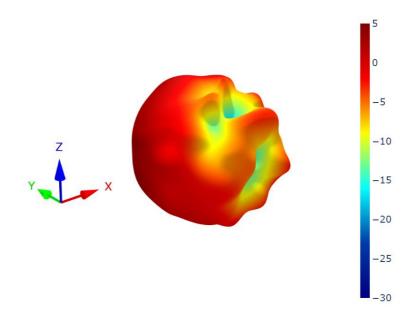

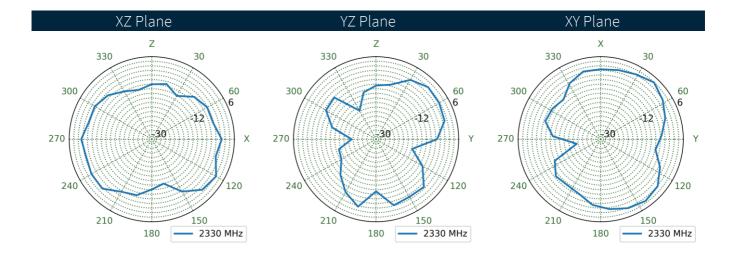





4.44

3D and 2D Radiation Patterns – Straight on Ground Plane

2333MHz

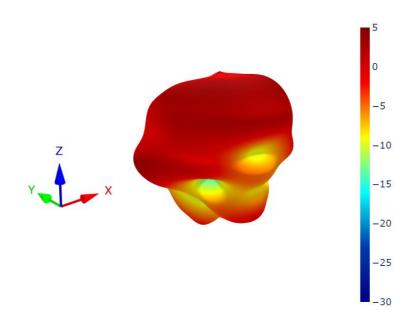


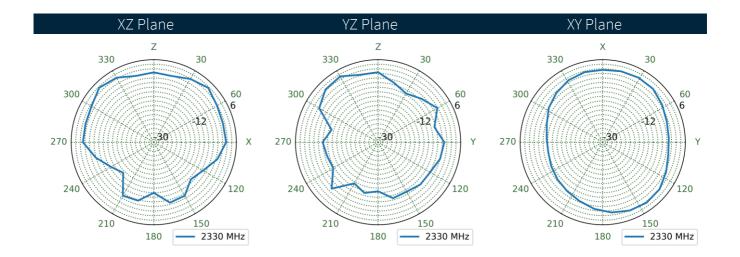




4.45 3D and 2D Radiation Patterns – Straight in Free Space

2333MHz

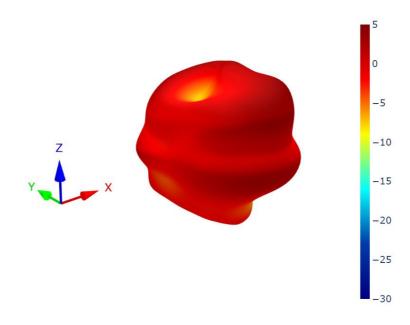

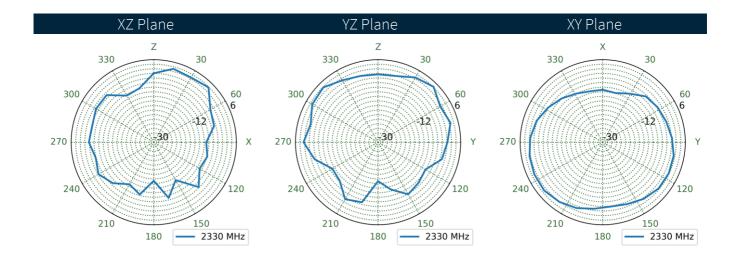





4.46

3D and 2D Radiation Patterns – Bent on Ground Plane

2590MHz

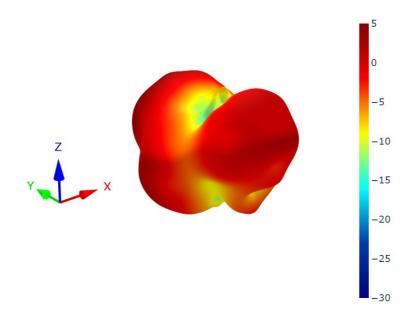


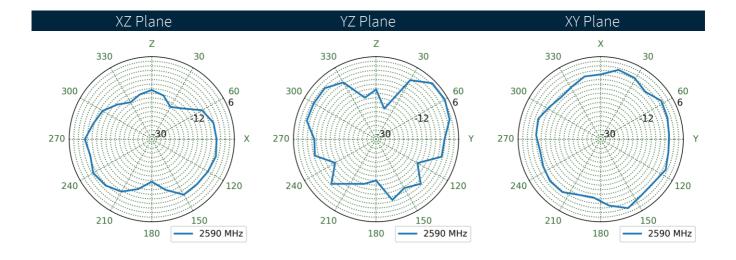




4.47 3D and 2D Radiation Patterns – Bent in Free Space

2590MHz

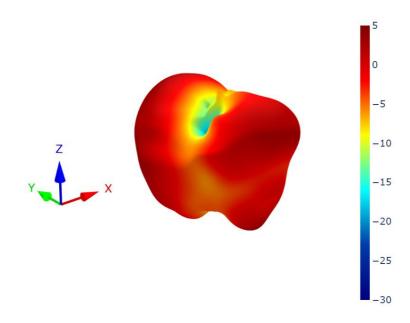

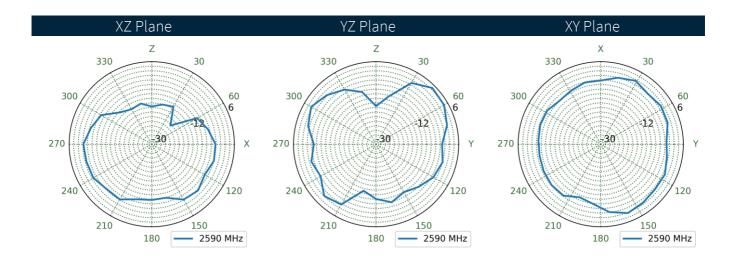





4.47

3D and 2D Radiation Patterns –Straight on Ground Plane

2333MHz

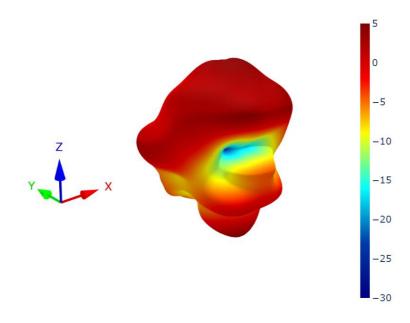

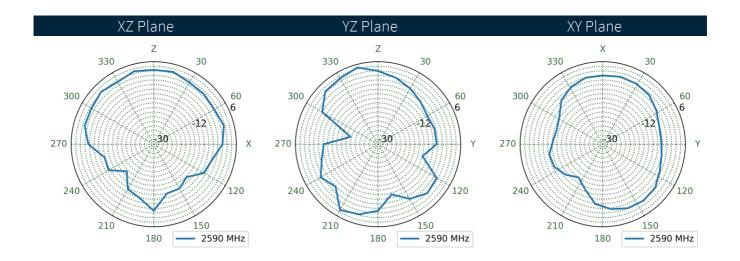


www.taoglas.com SPE-20-8-094-C




4.48

3D and 2D Radiation Patterns – Straight in Free Space

2590MHz

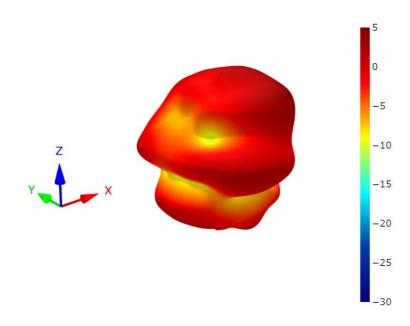

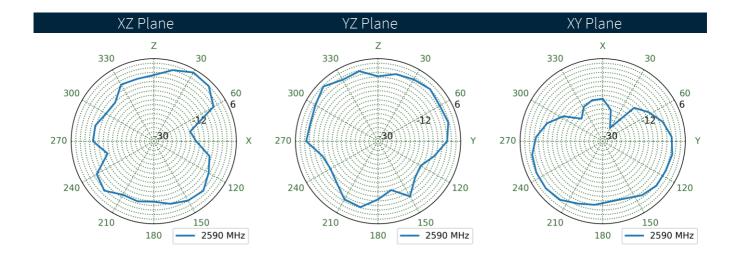





4.49

3D and 2D Radiation Patterns – Bent on Ground Plane

3550MHz

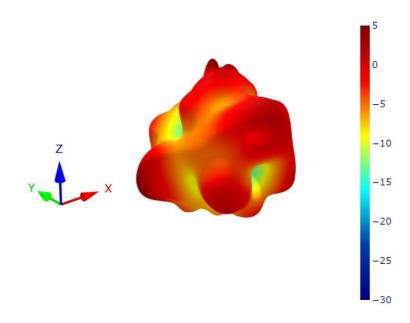

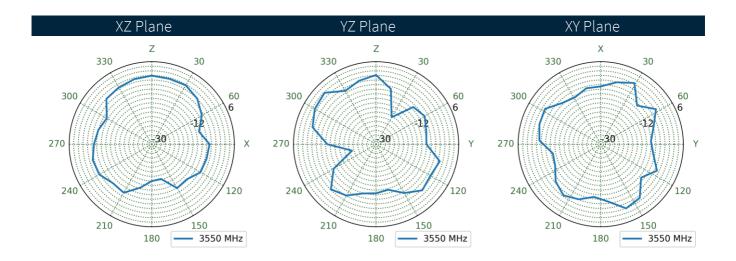





4.50

3D and 2D Radiation Patterns – Bent in Free Space

3550MHz

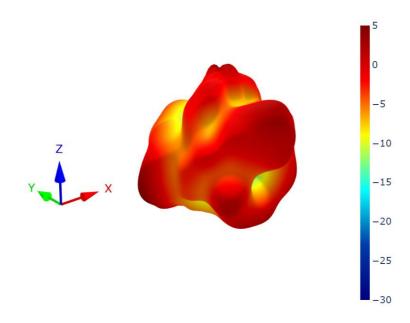


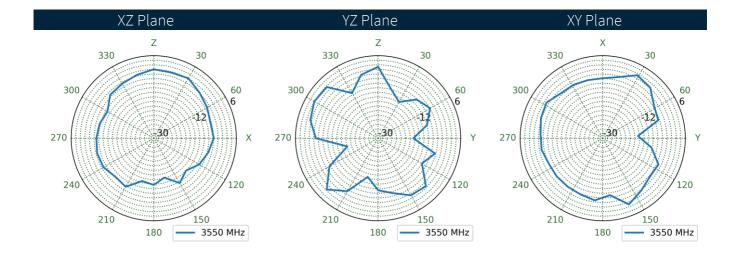




4.51 3D and 2D Radiation Patterns – Straight on Ground Plane

3550MHz

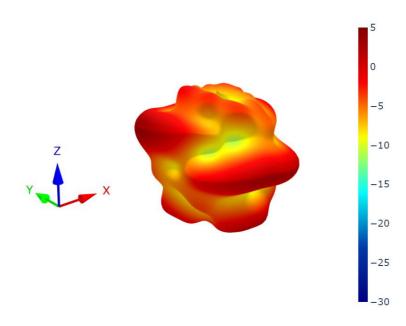


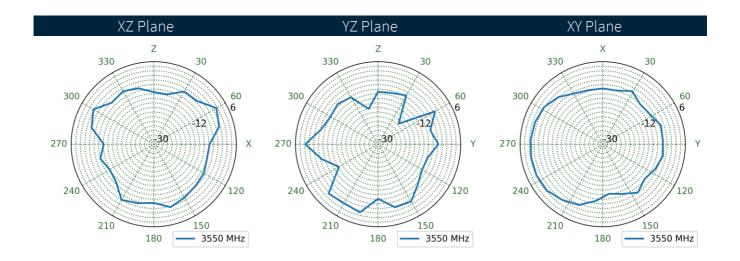




4.52 3D and 2D Radiation Patterns – Straight in Free Space

3550MHz

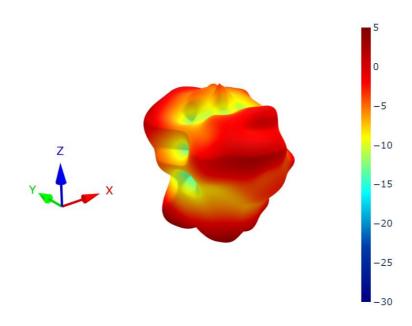

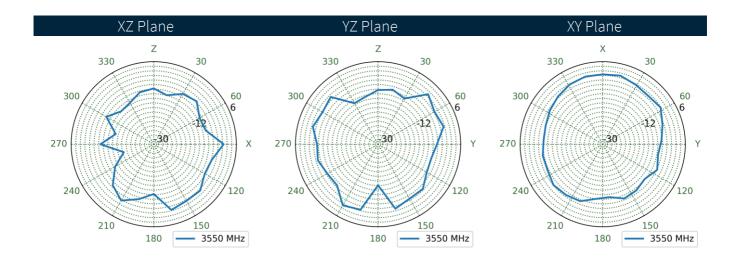





4.53

3D and 2D Radiation Patterns – Bent on Ground Plane

5538MHz

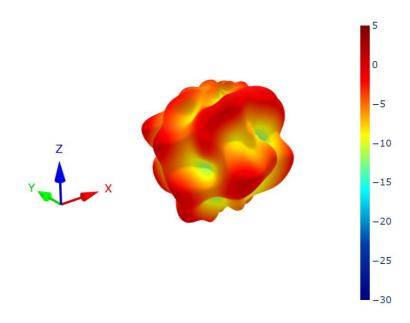

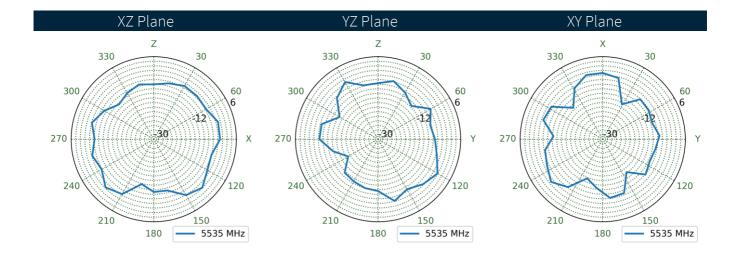





4.54

3D and 2D Radiation Patterns – Bent in Free Space

5538MHz

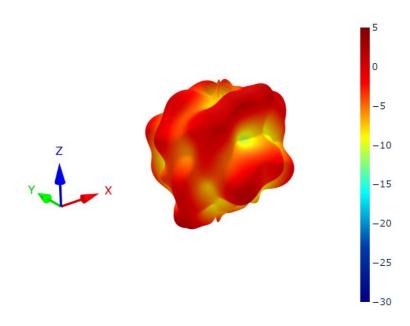

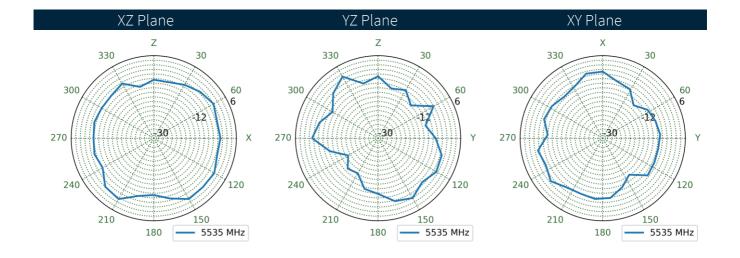





4.55

3D and 2D Radiation Patterns –Straight on Ground Plane

5538MHz

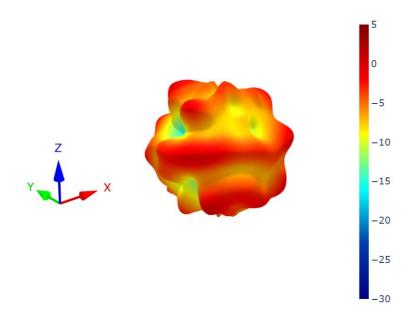

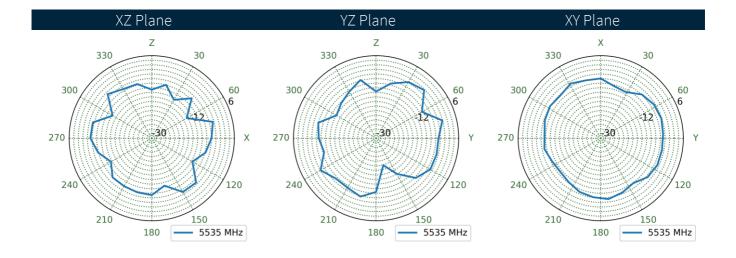





4.56

3D and 2D Radiation Patterns – Straight in Free Space

5538MHz

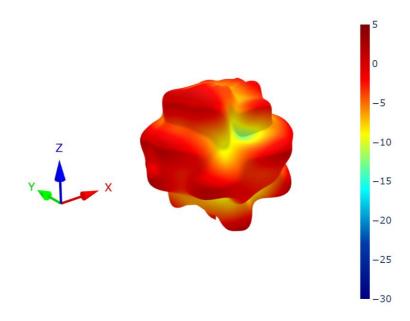

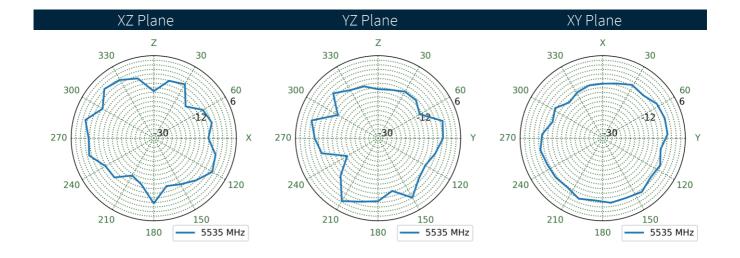





Mechanical Drawing (Units: mm)


ISO NO.: EDW-20-8-0090

STATE: Release

REV.	DESCRIPTION	ENG.	APPROVED	DATE
2001	Initial Design	Rachel Di	Aaron	2020/02/11
<u>1</u> 002	Change text description	Aron Yan	Aaron	2020/06/11



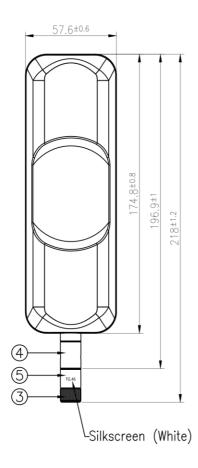

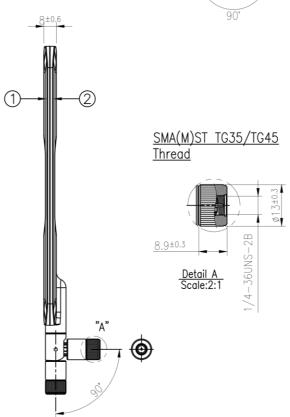

		Name	Material	Finish	QTY
	1	Housing Top TG35/TG45	ABS	Black	1
	2	Housing Bottom TG35/TG45	ABS	Black	1
	3	SMA(M)ST TG35/TG45 Thread	Brass	Black	1
	4	Hinge Top TG35/TG45 Type2	PP 8681	Black	1
rôn.	5	Bottom hinge with TC46 silkscreen	No.5 Zinc Alloy	Black	1

APPROVED BY: Clark					4		
CHECK BY:	Aaron	TAOGLAS.			TW Design Centre		
DRAWN BY:	Rachel Di	This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas				perty of Taoglas. Not	
DATE:	2020/02/11	TITLE: Apex IV WideBand 5G/4G Dipole Ten					
UNLESS OTHERWISE X.±0.5 SPECFIED X.±0.2				• ,	(M) - with 45	OMHz	
TOLERANCES ON:	TOLERANCES ON: .XX±0.1 .XX±0.05		PART NO. : TG.46.8113				
THIRD ANGLE PROJECTION	⊕ 母	UNIT:	mm	SCALE: 1:2	PAGES: 1/1	REV. DO2	

www.taoglas.com SPE-20-8-094-C 68



6. TG.46 Installation Instructions

The TG.46 antenna has an independent rotating SMA connector which enables the user to install the antenna in their preferred orientation. Once tightened, the SMA connector will hold the antenna in place. The following illustrations show the TG.46 used on a wall mounted device as an example.


Step 1:

Adjust the antenna to the preferred orientation having placed it on the SMA(F) connector of the device.

Step 2:

While holding the antenna with on hand, rotate the SMA(M) connector with the other until it is fully tightened. When tightened with the required force, the antenna will hold it's position without shifting, even when exposed to high vibration environments.



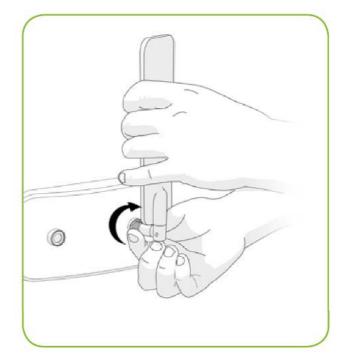

Note:

If using a torque wrench, the recommended force for mounting the antenna is 0.9Nm, maximum torque to prevent damage to the antenna is 1.17Nm.




7. Packaging

1pc TG.46.8113 per Small PE Bag with Video Link label

Dimensions: 100*280mm

Weight: 73.5g




25pcs per Large PE Bag Dimensions: 280*430mm

Weight: 1.85Kg



75pcs TG.46.8113 per Carton Carton Dimensions: 320*250*290mm

Weight: 6.1Kg





Changelog for the datasheet

SPE-20-8-094 - TG.46.8113

Revision: B (Current Version)					
Revision. B (Current	version)				
Date:	2024-02-02				
Notes:	Updated Spec Table to remove Band 87.				
Author:	Gary West				

Previous Revisions

Previous Revisions		
Revision: B		
Date:	2023-10-04	
Notes:	Updated Spec Table to include Band 87.	
Notes.	Opuateu Spec Table to include band 67.	
Author:	Aswin Biju	
Revision: A (Origina	l First Release)	
Date:	2020-09-15	
Notes:		
Author:	Jack Conroy	





www.taoglas.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

TG.46.8113