



#### LAN Transformer 10G Base-T PoE++

Part No: TMUG24C02Q

**Description:** 

10G Base-T transformer Single Port and 24pin SMT

Features:

PoE++ Transformer + CMC Industrial grade

Datasheet

www.taoglas.com




1.	Introduction	3
2.	Specifications	4
3.	Mechanical	5
4.	Electrical	6
5.	Packaging	7
	Changelog	8

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.





### 1.





Featuring a compatible footprint with industry LAN transformers, and designed to work in demanding industrial environmental conditions, the Taoglas TMUG24C02Q is a 10G Base-T Single Port of 24pin with Transformer and Common Mode Choke which makes it suitable for PoE+ (720mA) applications in Industrial environments.

Typical applications for this cost-effective part are:

- Industrial Automation
- Hubs
- Routers
- Switches
- Wireless Access Points

The Taoglas Magnetics Product Team have over fifteen years of LAN magnetics design and high-quality manufacturing. With an ever-expanding portfolio, we provide trusted products and services to customers within a wide range of applications such as: Networking and Interconnect Devices, Servers, Switches, Router, Communication systems and any Digital Consumer electronics.

The Taoglas Exos Series offer an extensive product line of LAN Transformers designed for commercial and industrial grade applications, supporting 10/100 Base-T (Exos100 Series), 1G Base-T (Exos10G Series) and 10G Base-T (Exos10G Series). These products include Single, Dual, and Quad configurations not only for standard applications but also for Power over Ethernet (PoE, PoE+, PoE++).

For more information on the range of products or for assistance with integration, contact your regional Taoglas customer support team.



### Specifications

Electrical Performance @25°C				
Inductance OCL	120uH Min. @100KHz/0.1V with 10.8mA DC Bias			
Turns Ratio (±3%)	TX=1CT: 1CT	RX=1CT: 1CT		
Insertion Loss	n Loss -1.5dB Max@1-250MHz	@1-250MHz		
	-3.0dB Max@250-500MHz			
Return Loss	-16dB Min	@1-40MHz		
	-16+10log(f/40) dB Min@40-500MHz			
Crosstalk	Crosstalk -35dB Min@1-100MHz	@1-100MHz		
	-30dB Min@100-500MHz			
CMRR	ARR -30dB Min@1-250MHz	@1-250MHz		
	-20dB Min@	250-500MHz		
DC Current Rating	720mA DC	Max @57V		
Hi-Pot	1500Vr	rms Min		

#### **Environmental Specifications**

**Operating Temperature** 

-40°C TO +85°C

Compliance

UL recognized - FILE NO. E528697

**RoHS** Compliant

#### Storage requirements

Humidity Storage Temperature MSL - 1 -40°C TO +125°C

2.




### Mechanical



3.

**Mechanical Drawings** 

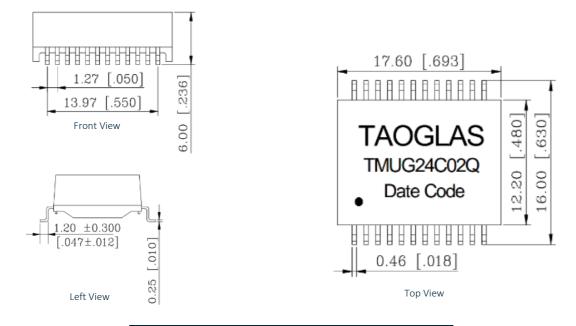


Mechanical Specifications				
17.6 mm				
16 mm				
6 mm				
Surface Mount (SMT)				

Dimensions are in millimeters with the following tolerances: X.XX =  $\pm 0.25$ 

#### 3.2


Pad Layout

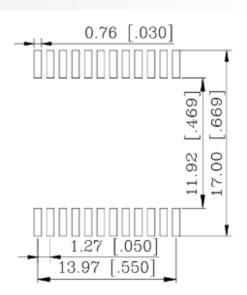







### Electrical



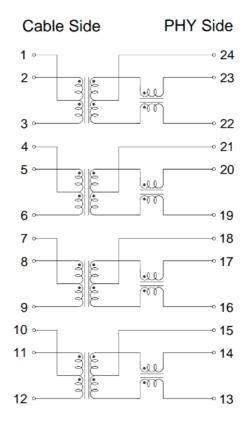



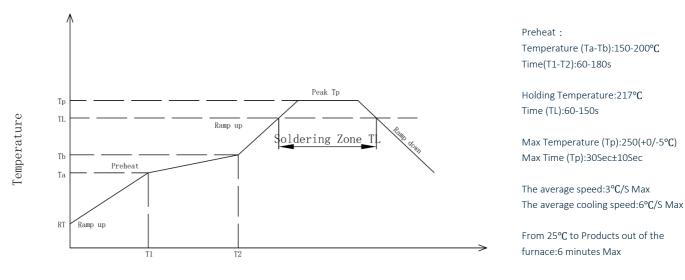


4.

4.1



## Packaging

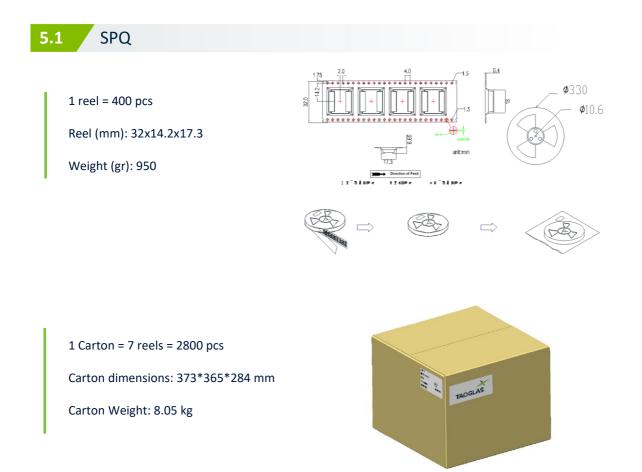

#### 5.2 Label

Taogl	as Limited	
P/N NO: XXXXXXXX		
QYT: XXX PCS	DC: XXXX	SPQ Label (8x5cm)
DATE: XXXX-XX-XX		
Taog	las Limited	7
P/N NO: XXXXXXXX		
PO: XXXXXXXX	B/N: XXXXXXXX	Carton Label (8x5cm)
QYT: XXX PCS	DC: XXXX	
DATE: XXXX-XX-XX		

5.




# Changelog

Changelog for the datasheet

SPE-23-8-052 – TMUG24C02Q

Revision: A (Original First Release)			
Date:	2023-03-30		
Notes:			
Author:	Javier Vasena		

#### **Previous Revisions**







# www.taoglas.com

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

TMUG24C02Q