

SPECIFICATION

Part No.	:	WCM.01.0151
Product Name:	:	2.4GHz Button Antenna
Features	:	Tiny Size - 19.8mm*14.3mm*16.4mm
		2400MHz to 2500MHz Antenna
		Wi-Fi / Bluetooth
		60%+ Efficiency
		RP SMA(M) Connector
		IP67
		Omnidirectional
		ROHS Compliant

Photo:





1. Introduction

The WCM.01 2.4GHz antenna is the smallest RP-SMA(M) external antenna in the market, fitting into spaces no other traditional monopole, dipole or rubber ducky antenna can go. A unique PIFA design ensures omnidirectional gain across 2.4GHz to 2.5GHz ensuring constant reception and transmission to make it a great Wi-Fi antenna for 2.4GHz Wi-Fi and Bluetooth applications.

This antenna features greater than 60% efficiency when connected directly to the ground plane of the device.

Typical Applications

- Application Points
- Routers
- IoT M2M devices
- Smart home applications

This antenna comes with a RP SMA(M) to be compatible with most Wi-Fi applications and routers in the market. The WCM.01 antenna is also IP67 water resistant. The ideal position for the antenna to radiate is mounted clear of metal. Connector is customizable.

Contact Taoglas regional sales office for more information.



2. Specification

ELECTRICAL									
Frequen	2400	2450	2500						
Efficiency (%)									
In free	e space	33.30	30.36	29.65					
	Ground plane(center)	63.43	71.44	66.85					
On the 10*10cm	Ground plane(edge)	55.85	68.43	61.73					
On the 20*20cm	Ground plane(center)	64.20	71.40	63.97					
	Ground plane(edge)	62.55 58.31	81.30 70.49	69.73 60.87					
On the 30*30cm	Ground plane(center) Ground plane(edge)	62.11	73.46	61.90					
Average gain (dBi)									
In free	e space	-4.78	-5.18	-5.28					
	Ground plane(center)	-1.98	-1.46	-1.75					
On the 10*10cm	Ground plane(edge)	-2.53	-1.65	-2.10					
On the 20*20cm	Ground plane(center)	-1.92	-1.46	-1.94					
	Ground plane(edge)	-2.04	-0.90	-1.57					
	Ground plane(center)	-2.34	-1.52	-2.16					
On the 30*30cm	Ground plane(edge)	-2.07	-1.34	-2.08					
	Peak gain (dBi)								
In free space		0.89	0.40	0.12					
On the 10*10cm	Ground plane(center)	2.02	2.45	2.37					
On the 10*10cm	Ground plane(edge)	3.46	4.09	3.47					
On the 20*20cm	Ground plane(center)	4.26	4.54	3.69					
On the 20*20cm	Ground plane(edge)	4.02	5.40	4.65					
On the 30*30cm	Ground plane(center)	3.64	4.85	4.06					
On the 30*30cm	Ground plane(edge)	3.79	4.23	3.15					
Radiation	Omnidirectional								
Polarization	Linear								
Impedance	50 Ω								
Input Power	10								
	MECHANICAL								
Antenna Dimension	19.8*14.3*16.4mm								
Casing	ABS								
Casing	, (1								
Connector	RP-SN	1A(M)							



ENVIRONMENTAL				
Operation Temperature	-40°C ~ + 85°C			
Storage Temperature	-40°C ~ + 85°C			
Humidity	Non-condensing 65°C 95% RH			



3. Antenna Characteristics

3.1 Testing Setup



a) In free space



b) With 10*10cm ground plane center



c) With 10*10cm ground plane edge



d) With 20*20cm ground plane center



e) With 20*20cm ground plane edge




f) With 30*30cm ground plane center



g) With 30*30cm ground plane edge


Figure.1 Antenna Measurement Setup



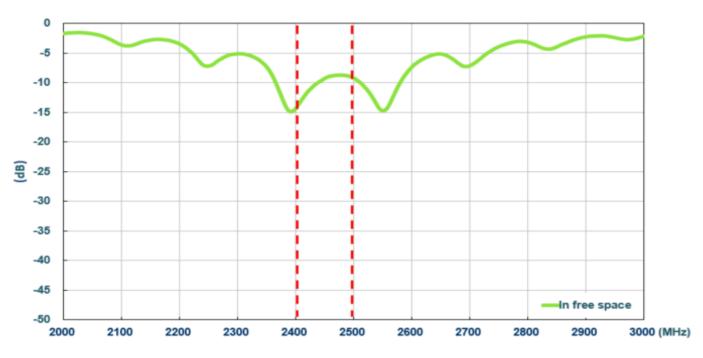

3.2 Return Loss (In free space)


Figure 2. Return loss of WCM.01 antenna

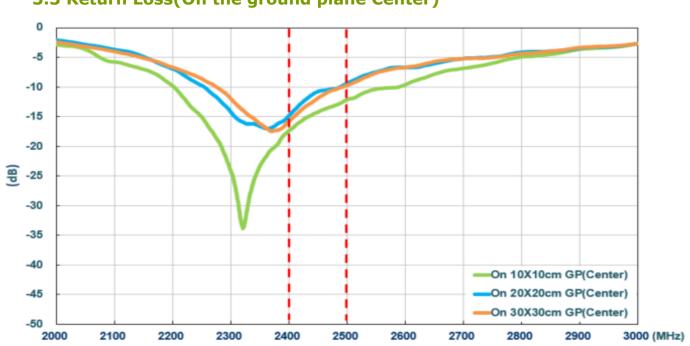

3.3 Return Loss(On the ground plane Center)


Figure 3. Return loss of WCM.01 antenna with different ground plane size



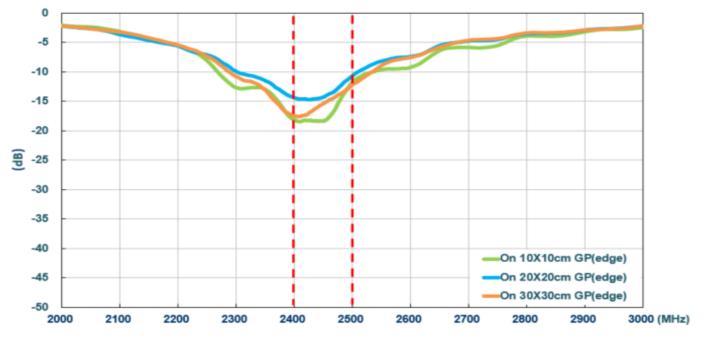

3.4 Return Loss (On the ground plane Edge)


Figure 4. Return loss of WCM.01 antenna with different ground plane size

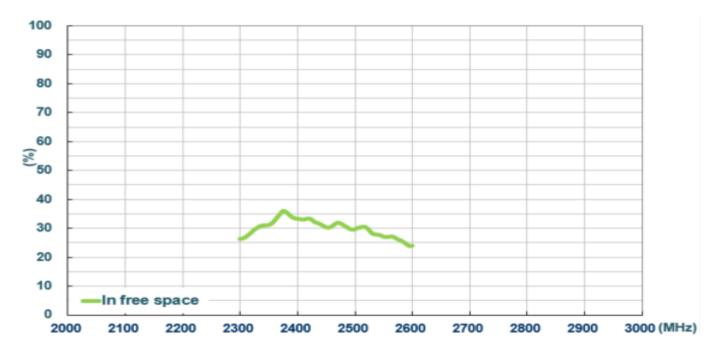

3.5 Efficiency (In free space)


Figure 5. Efficiency of WCM.01 antenna



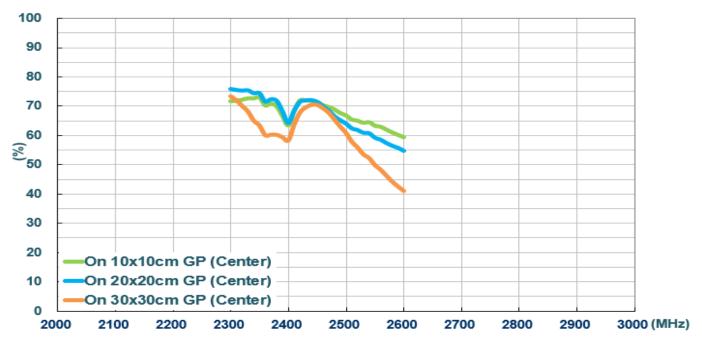

3.6 Efficiency (On the ground plane Center)


Figure 6. Return loss of WCM.01 antenna with different ground plane size

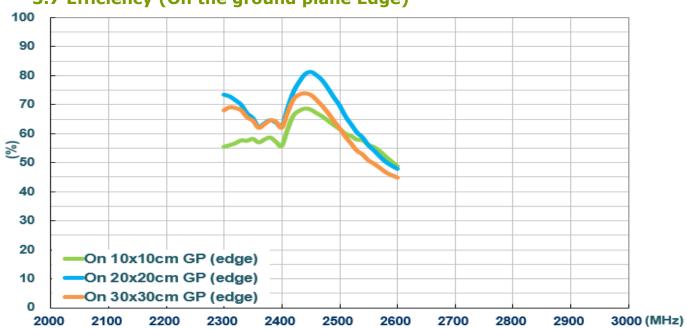

3.7 Efficiency (On the ground plane Edge)

Figure 7. Return loss of WCM.01 antenna with different ground plane size



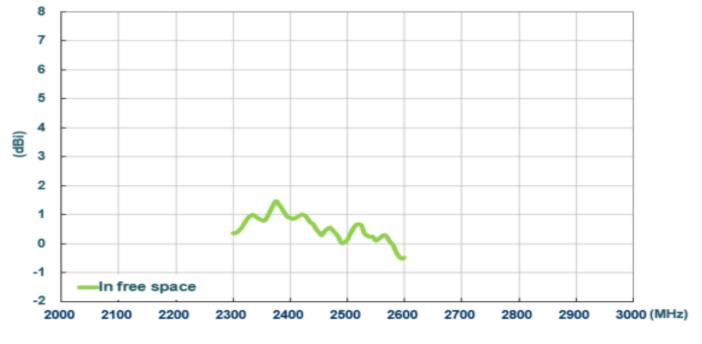

3.8 Peak Gain (In free space)





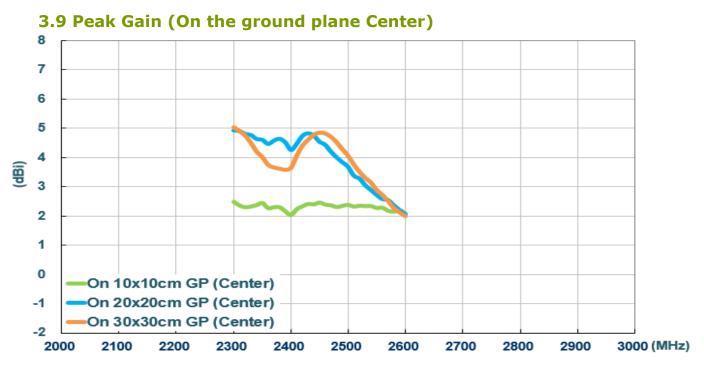



Figure 9. Peak gain of WCM.01 antenna with different ground plane size



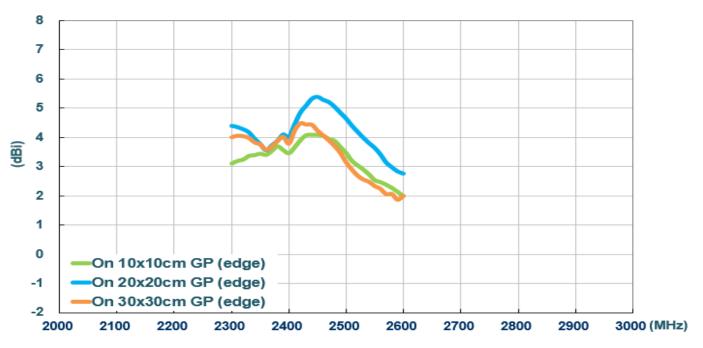

3.10 Peak Gain (On the ground plane Edge)




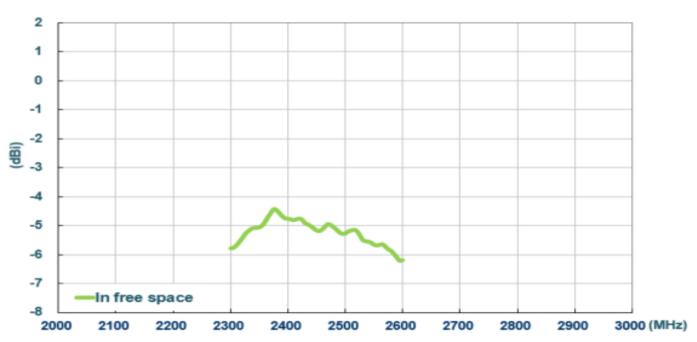

3.11 Average Gain (In free space)


Figure 11. Average gain of WCM.01



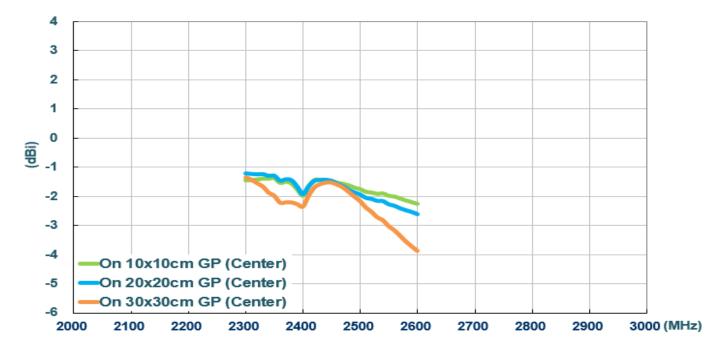

3.12 Average Gain (On the ground plane Center)

Figure 12. Average gain of WCM.01 antenna with different ground plane size

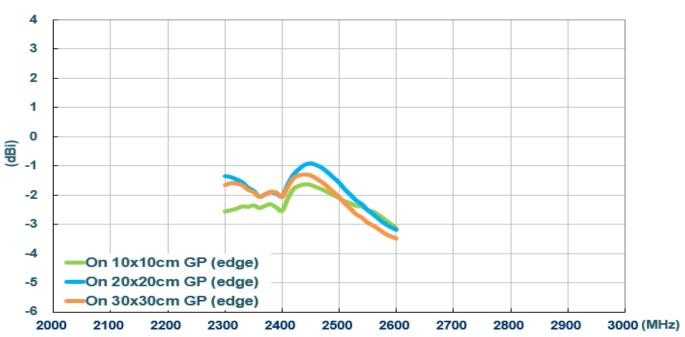

3.13 Average Gain (On the ground plane Edge)

Figure 13. Average gain of WCM.01 antenna with different ground plane size



4. Antenna Radiation Patterns


The antenna radiation patterns were measured in CTIA certified ETS Anechoic Chamber. The measurement setup as below,



In Free Space




On 10*10cm ground plane (Center)

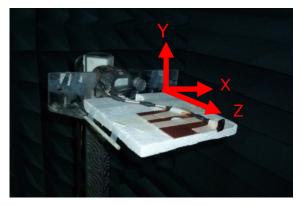


On 10*10cm ground plane (Edge)



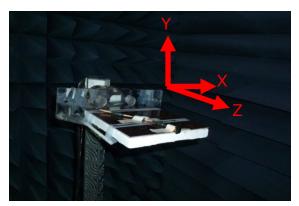


On 20*20cm ground plane (Center)

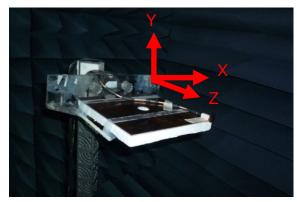

On 20*20cm ground plane (Edge)



On 30*30cm ground plane (Center)

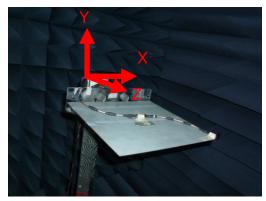


On 30*30cm ground plane (Edge)

Figure.14. Testing Setup in ETS Anechoic Chamber




4.1 2D Radiation Pattern (In free space) XY Plane

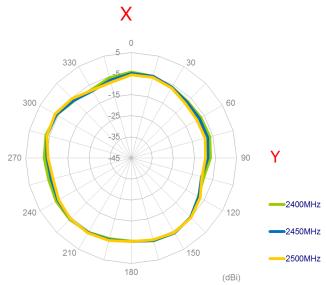


XZ Plane

YZ Plane

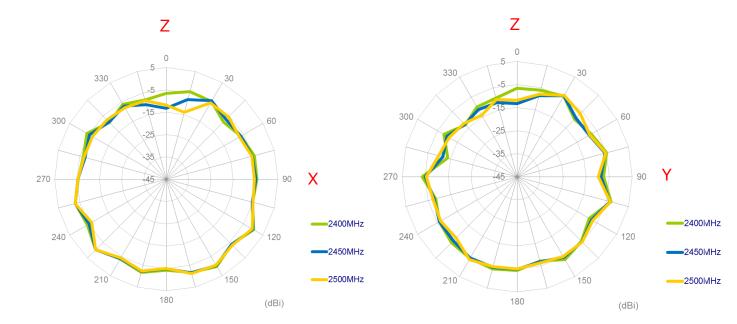




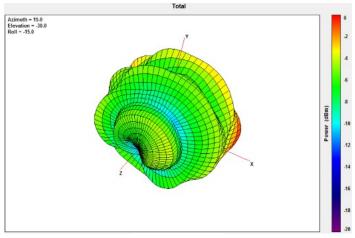


4.2 3D Radiation Pattern (In free space)



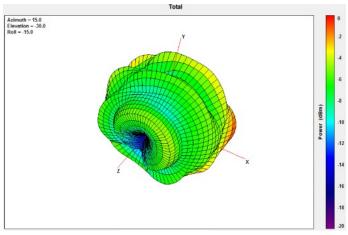


2450MHz

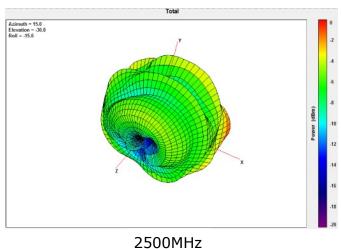




4.3 2D Radiation Pattern (On the 10*10cm ground plane Center)

XY Plane

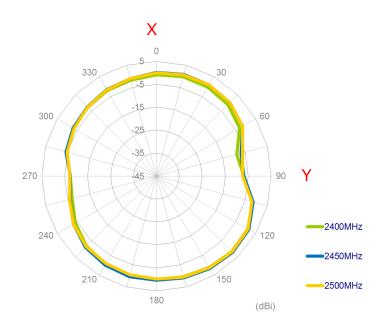


XZ Plane



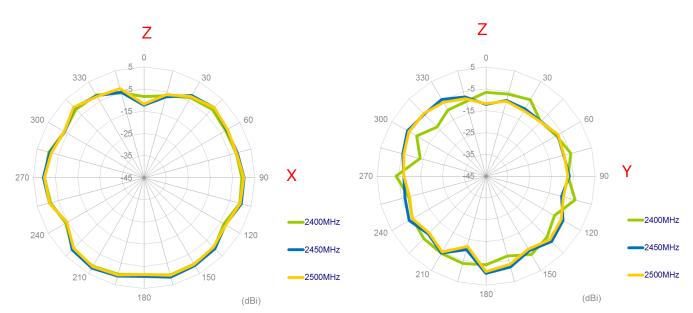




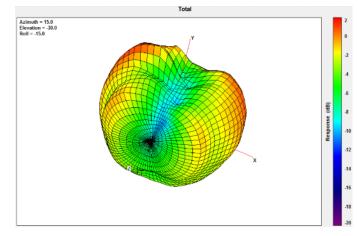


4.4 3D Radiation Pattern (On the 10*10cm ground plane Center)

2400MHz

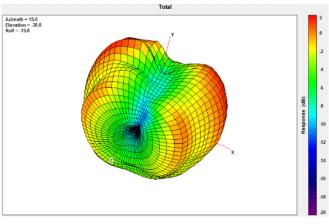


2450MHz

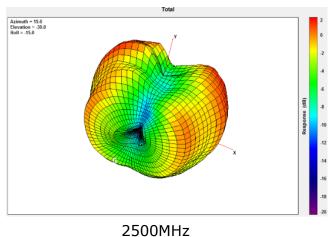




4.5 2D Radiation Pattern (On the 10*10cm ground plane Edge)


XY Plane

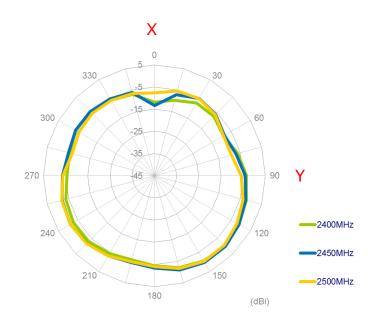


XZ Plane



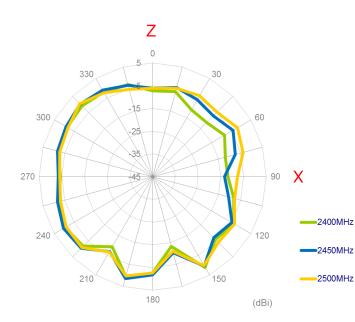

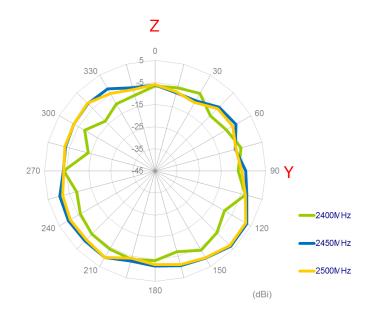




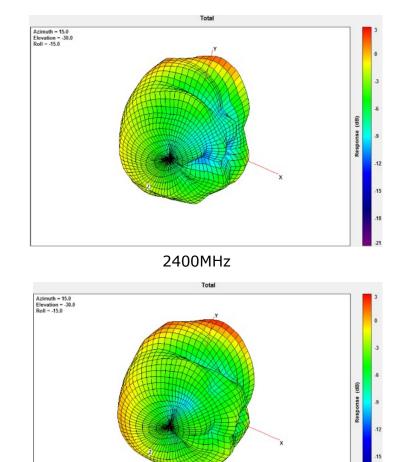

4.6 3D Radiation Pattern (On the 10*10cm ground plane Edge)



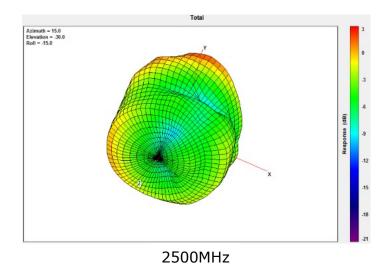


-18




4.7 2D Radiation Pattern (On the 20*20cm ground plane Center)


XY Plane

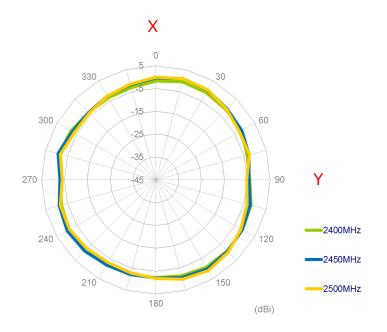

XZ Plane

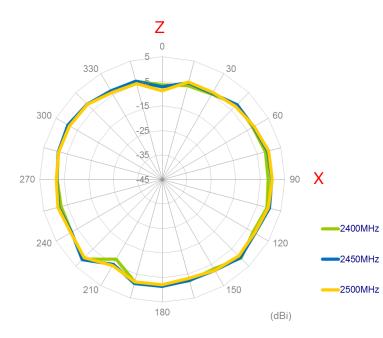


YZ Plane

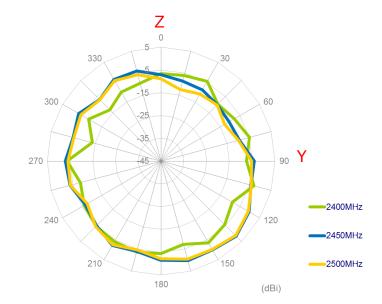





4.8 3D Radiation Pattern (On the 20*20cm ground plane Center)

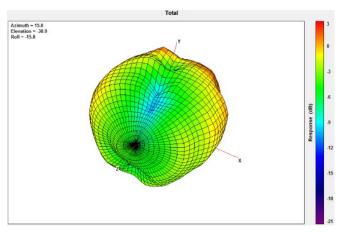

2400MHz

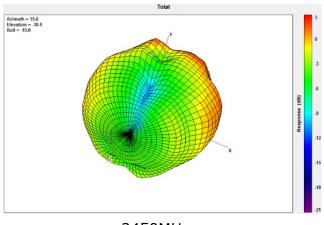


2450MHz

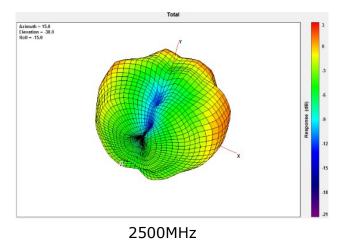



4.9 2D Radiation Pattern (On the 20*20cm ground plane Edge)


XY Plane

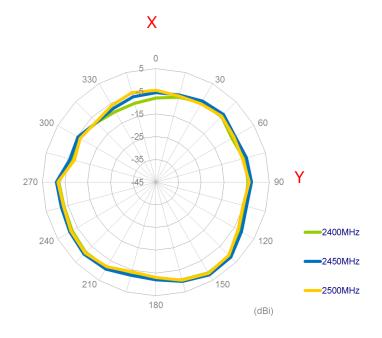


XZ Plane

Z 0 5 330 30 -15 300 60 -25 -35 270 45 90 X 2400MHz 240 120 2450MHz 210 150 2500MHz 180 (dBi)


YZ Plane

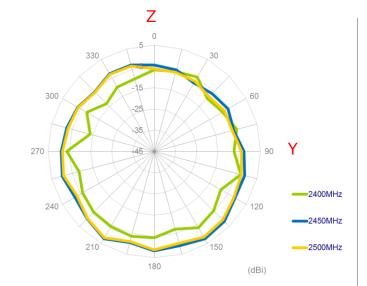



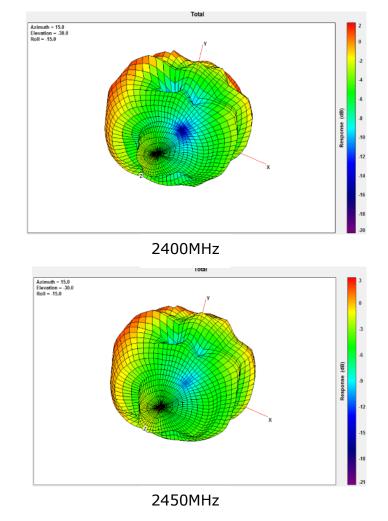


4.10 3D Radiation Pattern (On the 20*20cm ground plane Edge)

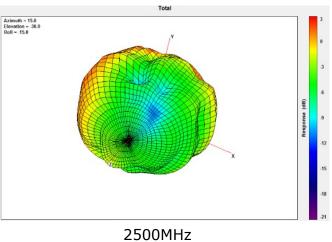




4.11 2D Radiation Pattern (On the 30*30cm ground plane Center)


XY Plane

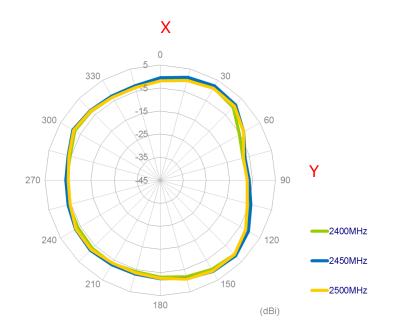

XZ Plane


YZ Plane

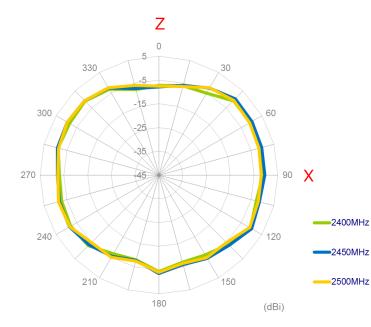

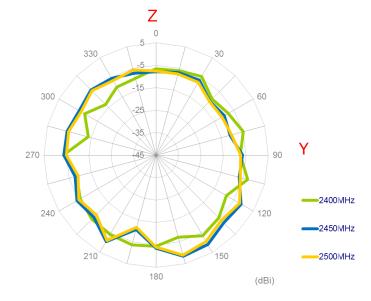





4.12 3D Radiation Pattern (On the 30*30cm ground plane Center)

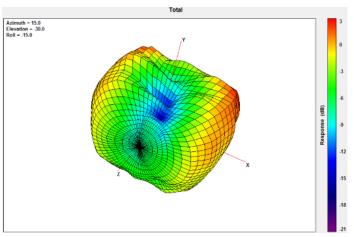

2400MHz

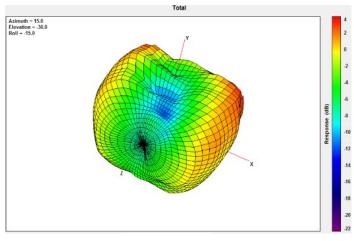

2450MHz

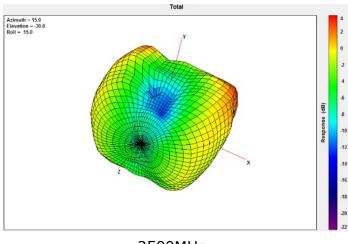


2500MHz




4.13 2D Radiation Pattern (On the 30*30cm ground plane Edge)

XY Plane

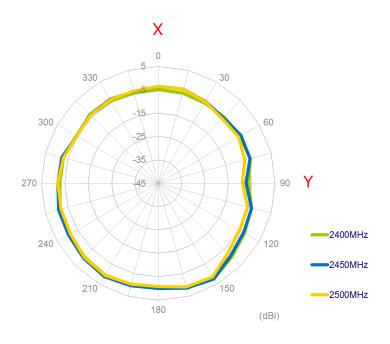






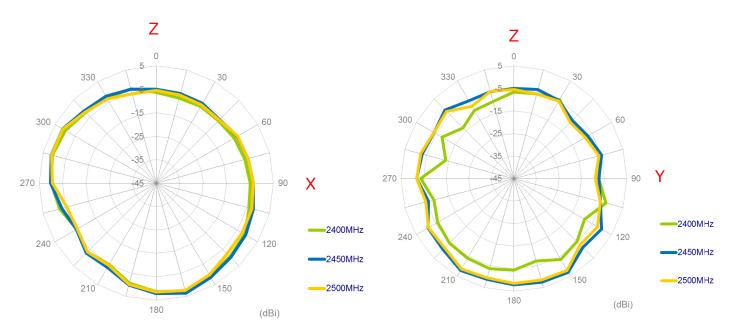




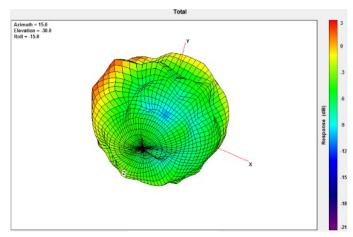


4.14 3D Radiation Pattern (On the 30*30cm ground plane Edge)



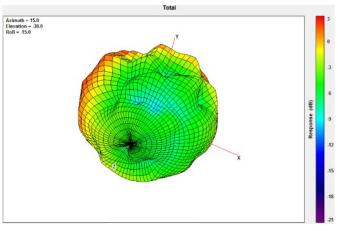


2450MHz

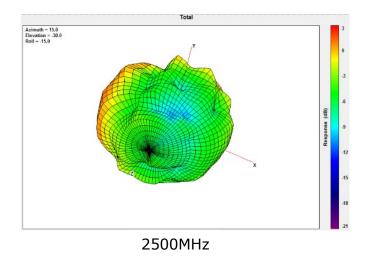



5. Drawing(Unit: mm)

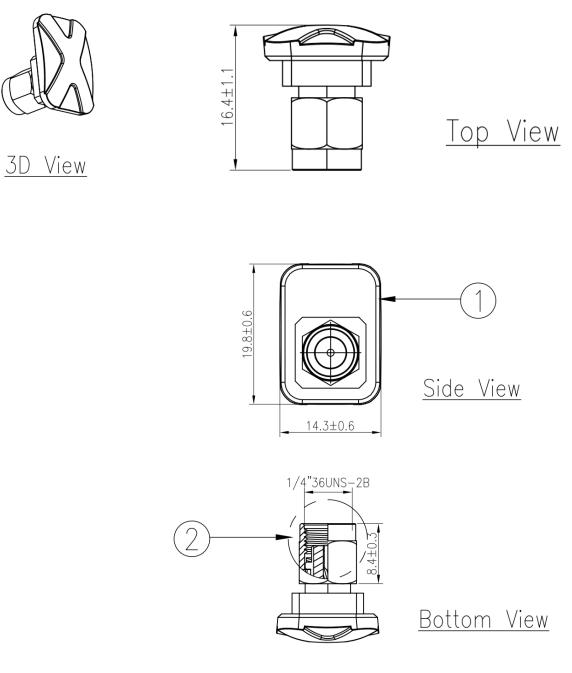

	Name	Material	Finish	QTY
1	External housing	ABS	Black	1
2	RP-SMA(M)	Brass	Gold	1



6. Packaging

80 mm 40 mm 1 pcs WCM.01.0151 per PE Bag PE Bag Dimensions - 80*40mm Weight - .007g 100 PE Bags per Large PE Bag 240 mm 100 pcs WCM.01.0151 per Large PE Bag Large Polybag Dimensions - 240*170mm Weight - 0.7kg 170 mm 15 Large PE bags per carton 1500 pcs WCM.01.0151 per carton Carton Dimensions - 360*310*160mm 160mm Weight - 11kg 310mm 360mm Pallet Dimensions 1080mm*930m*1430mm 930mm 72 Cartons per Pallet 12 Cartons per layer 6 Layers 1080mm 1430mm



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

WCM.01.0151