

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECN# T-9604	88 FEB 17	Z. TEMAN
C	REVISED AND REDRAWN ON CAD PER ECN# T-16516	91 JUL 25	Z. TEMAN
D	REVISED AND REDRAWN ON CAD PER ECN# T-30838	02 APR 26	M. HIGGY

NOTES:


1 PART DESCRIPTION: BRAID TERMINATOR ASSEMBLY

A. MATERIAL:

1. INSULATION SLEEVE: HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE
2. SOLDER RING: COMPOSITION Sn63 PER QQ-S-571
3. TERMINATOR SHELL: BRASS ALLOY PER ASTM B16
4. INSERT: IMMERSION RESISTANT THERMOPLASTIC

B. FINISH:

1. TERMINATOR SHELL: SOLDER PLATED PER MIL-P-81728A OVER NICKEL PER QQ-N-290

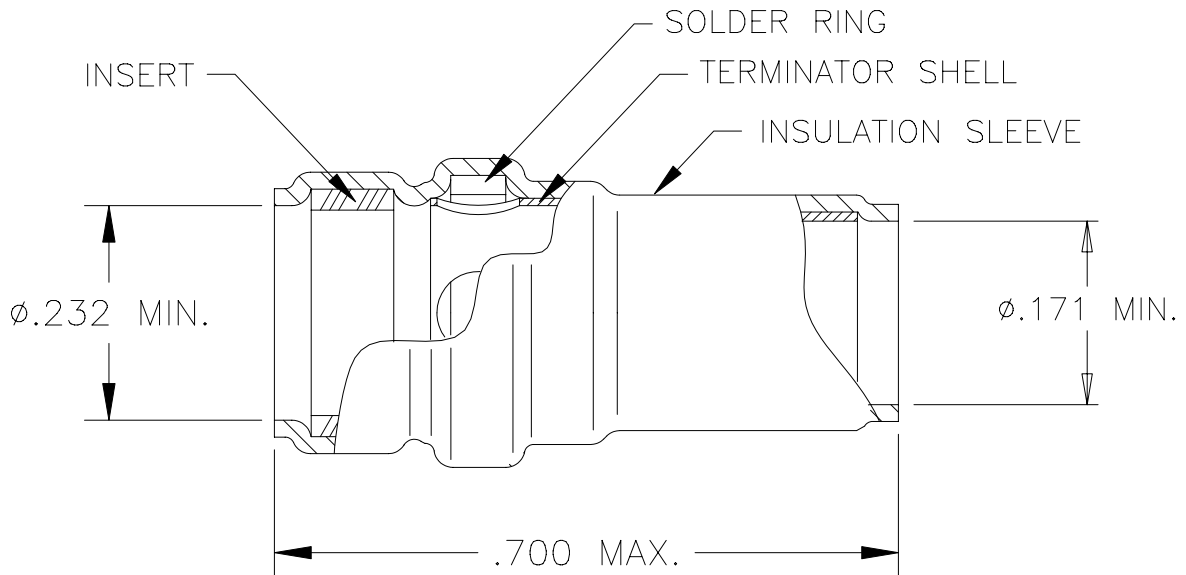

SPECIFICATION CONTROL DRAWING

If this document is printed it becomes uncontrolled.  
Check for the latest revision.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE IN BRACKETS.  DECIMALS .XXX ± ——— .XX ± ——— ANGLES .X ± ———	REDRAWN terry DATE 85 SEPT 30		Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA. 94025 U.S.A.			
	CHECKED J.B.K. DATE 91 JUL 22				TITLE BRAID TERMINATOR ASSEMBLY WITH SEAL	
	APPROVED  APPROVED Z.E.T. DATE 91 JUL 25	CAD NAME T30838	SIZE A	CODE IDENT. NO. 06090	DWG. NO. D-600-0030	REV D
	WEIGHT _____ lbs ( _____ lbs)	THIRD ANGLE PROJECTION 	DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-600-0030](#)