

**SPECIFICATION CONTROL DRAWING**

**2022H4424**

**CHEMINAX**

120 OHM, AWG 22, 19 STRANDS OF AWG 34,  
TWINAXIAL CABLE

Date: 4-5-19  
Revision: F


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

**CONSTRUCTION DETAILS**

**ELECTRICAL CHARACTERISTICS**

DIMENSIONS ARE NOMINAL VALUES IN INCHES, UNLESS OTHERWISE DESIGNATED.

CHARACTERISTIC IMPEDANCE	120 ± 12 ohms, Method D at 1 MHz with shield grounded
MUTUAL CAPACITANCE	12.7 pF/ft. (nominal) 18.2 (maximum)
VELOCITY OF PROPAGATION	77% (nominal)
ATTENUATION	0.8 dB/100 ft. (maximum) at 1 MHz 1.7 dB/100 ft. (maximum) at 6 MHz 2.2 dB/100 ft. (maximum) at 10 MHz 6.1 dB/100 ft. (maximum) at 100 MHz

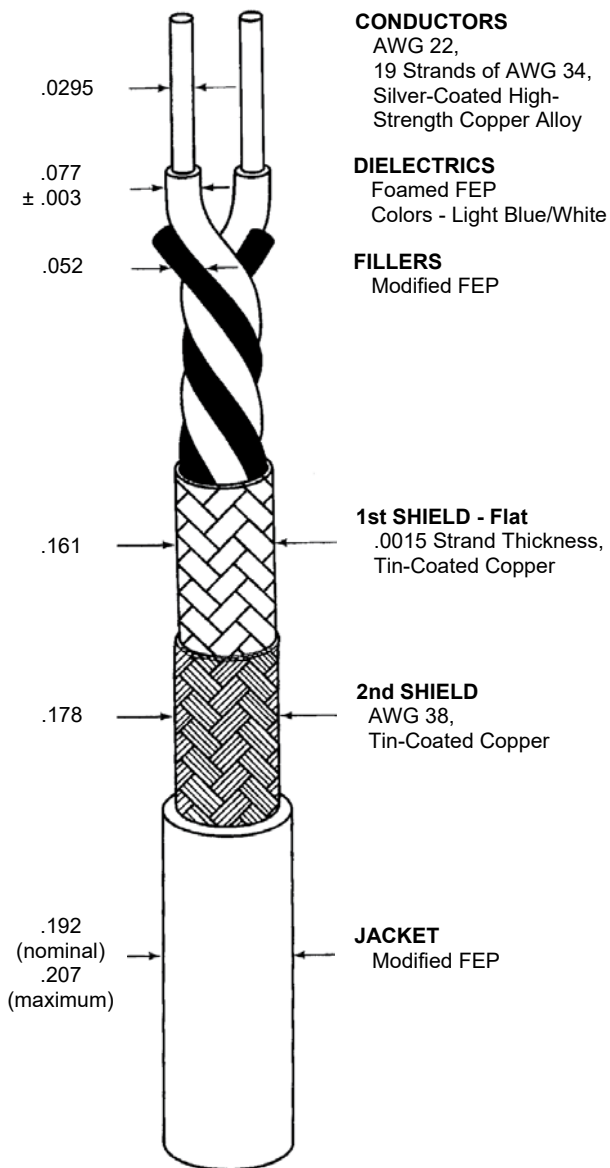

**ADDITIONAL REQUIREMENTS**

**ELECTRICAL**

CONDUCTOR RESISTANCE (prior to cabling)	17.3 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000 ft.
JACKET FLAWS SPARK TEST IMPULSE TEST	1.0 kV (rms) 6.0 kV (peak)
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)

**ENVIRONMENTAL**

FLAMMABILITY	Method B
HEAT SHOCK	225°C
LOW TEMPERATURE-COLD BEND	-55°C/5.50 inch mandrel
UV LASER MARK CONTRAST FULL MASK LASER DOT MATRIX LASER	For 2022H4424-9LM only: 67% (minimum) 60% (minimum)
VOLTAGE WITHSTAND (Post Environmental)	1000 volts (rms), 1 minute

**PHYSICAL**

INSULATION (DIELECTRIC) (prior to cabling) ELONGATION TENSILE STRENGTH	50% (minimum) 600 lbf/in <sup>2</sup> (minimum)
JACKET ELONGATION TENSILE STRENGTH	200% (minimum) 2000 lbf/in <sup>2</sup> (minimum)
JACKET THICKNESS	.007 inch (nominal)

SHIELD COVERAGE 1st SHIELD 2nd SHIELD	92% (minimum) 85% (minimum)
---	--------------------------------

WEIGHT	31.7 lbs/1000 ft. (maximum)
--------	-----------------------------

**ENGINEERING REFERENCE**

TEMPERATURE RATING	150°C (maximum)
--------------------	-----------------

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Unless otherwise specified, outer jacket color will be translucent white designated by a "-9X" appended to the part number, e.g. 2022H4424-9X.

A white laser markable outer jacket will be designated by a "-9LM" appended to the part number, e.g. 2022H4424-9LM.

Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2022H4424-9](#)