


CUSTOMER DRAWING

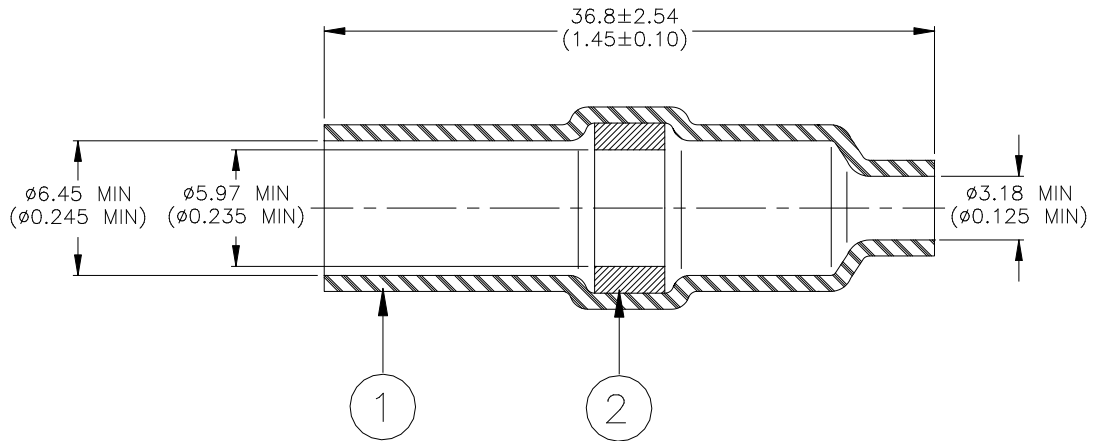


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL0 per ANSI-J-STD-004.

APPLICATION

1. This part is designed to make a stub or an in-line splice between two tin or silver plated wires having a combined CMA between 11700 and 18900 circular mils. Wires are to be stripped 25.4 to 28.58 (1 to 1-1/8) and overlapped under the solder preform. Wire insulation rating must be at least 125°C.
2. Sleeve will recover to 2.54 (0.10) maximum I.D.
3. Sleeve may be installed with Raychem IR-500 RG-2 reflector. Ends of sleeve are to be recovered before solder is melted.
The use of a Raychem AD-1319 Wire Holder is recommended to hold wires in proper alignment during installation of sleeve.
4. Maximum weight of sleeve: 1.9 lbs/mpc.

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem DEVICES	TITLE: SOLDERSLEEVE, IN-LINE SPLICE, HIGH TEMPERATURE WIRE (11700 – 18900 CMA)			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.					DOCUMENT NO.: D-110-55	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			Revision: 2	Issue Date: March 2020
DRAWN BY: M. FORONDA	DATE: 22-Mar-00	ECO: ECO-20-003569		SCALE: None	SIZE: A	SHEET: 1 of 1

Print Date: 17-Mar-20 If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-110-55CS1290](#)