SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, # 0,0.4,8 VOE APPROVEO: EN 133 200

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREDUENCY:

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND:

2.1 µA @ 120V 60Hz

3.65 µA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS: 100 - To Io=Ir -

RELIABILITY SPECIFICATIONS:

STURAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONDS

CUSTOMER DRAWING CATALOG # 15SRB8-Q APPRVD. DATE PJO 08NDV07

TEST SPECIFICATIONS:

INDUCTANCE: N/A mH

CAPACITANCE: (MEASURED @ IKHz, 0.250VAC MAX., 25°C±1°E)

33pF ± 25% N/A

LINE TO GROUND: LINE TO LINE:

DISCHARGE RESISTOR: N/A I/G AND I/I T.R

NO DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDC,


20°€ AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

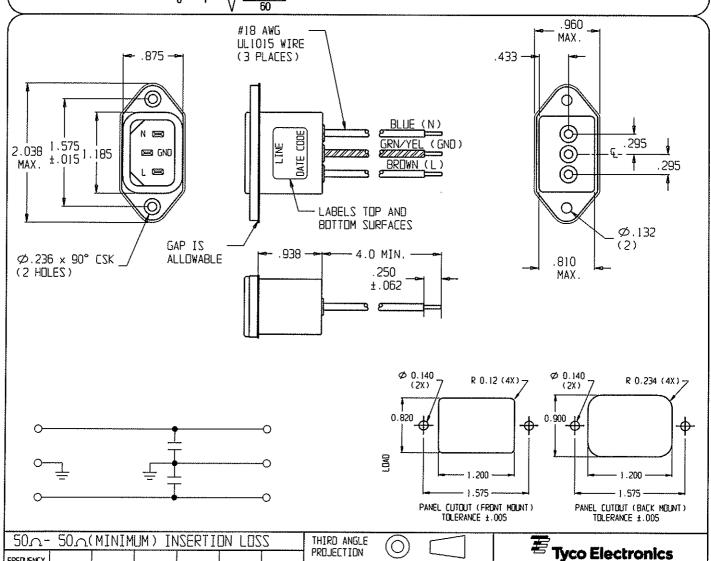

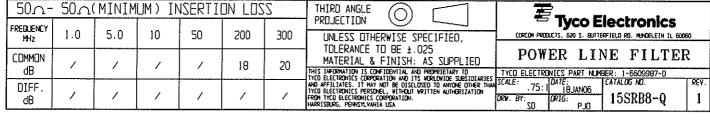

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: