ACT24JB05SE [V001] V ACTIVE

DEUTSCH | DEUTSCH 38999 Series III Composite Connectors

TE Internal #: YACT24JB05SEV00100 DEUTSCH 38999 Series III Composite Connectors, Standard Circular Connectors, Cable-to-Panel, 5 Position, Sealable, Wire & Cable

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Cable-to-Panel Number of Positions: 5 Sealable: Yes Connector & Contact Terminates To: Wire & Cable Contact Current Rating (Max): 7.5 A

Features

Product Type Features

Product Type

Assembly Type

Connector

Electrical Connector

Connector System	Cable-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Jam Nut Receptacle
Configuration Features	
Keying & Polarized Position Locations	E
Factory Installed Backshell	No
Keying	Keyway Polarization E
Number of Positions	5
Number of Power Positions	0
Number of Power Positions Number of Signal Positions	0 5
Number of Signal Positions	5

DEUTSCH 38999 Series III Composite Connectors, Standard Circular Connectors, Cable-to-Panel, 5 Position, Sealable, Wire & Cable



Operating Voltage	600 VAC
Body Features	
Feedthrough Type	No
Environmental Protection Type	Elastomer Sealed
Entry Style	Rear Insertion
Peripheral Seal Material	Silicone
Environmental Protection	Yes
Weight	13.3 g[.0294 lb]
O-Ring Material	Silicone
Fluid Type	Coolanol 25, M2-V, MIL-DTL-5624 (JP-4,JF 5), MIL-DTL-83133 (JP-8), MIL-PRF-23699, MIL-PRF-5606, MIL-PRF-7808, SEA- AMS1424 Type I
Shell Plating Material	Cadmium, O.D.
Shell Base Material	Composite
Circular Connector Insulation Material Type	Hard Dielectric/Silicone
Hermetically Sealed	No
Contact Features	
Contact Quantity (Size 20)	5
Contact Current Rating (Max)	7.5 A
Reverse Gender	No
Contact Layout Arrangement	B05
Circular Connector Contact Type	Socket
Mechanical Attachment	
Mating Retention Type	Triple Start Threaded
Panel Mount Feature	With
Panel Mount Feature Type	Jam Nut
Connector Mounting Type	Panel Mount
Polarization Code	E
Mating Alignment Type	Keyed
Mating Retention	With
Housing Features	
Circular Connector Shell Size	11
Alignment Keyed	Clocking

C For support call+1 800 522 6752

DEUTSCH 38999 Series III Composite Connectors, Standard Circular Connectors, Cable-to-Panel, 5 Position, Sealable, Wire & Cable



Dimensions

Panel Thickness	1.58 – 3.2 mm[.062 – .126 in]
Accepts Wire Insulation Diameter Range	1.02 – 2.11 mm[.04 – .083 in]
Assembly Length	33 mm[1.3 in]
Wire Size	.2 – .52 mm²
Usage Conditions	
Fluid Resistance	Yes
Operating Temperature Range	-65 – 200 °C[-85 – 392 °F]
Operation/Application	
Durability Rating	500 Cycles
Circuit Application	Signal
Shielded	Yes
Packaging Features	
Packaging Quantity	1
Other	
Position Locations Omitted	All

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Cd (3.45% in Plating) Pb (1.2% in Contact Lead-Coper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert Subassembly) Atile Safe Usage Statements Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

DEUTSCH 38999 Series III Composite Connectors, Standard Circular Connectors, Cable-to-Panel, 5 Position, Sealable, Wire & Cable



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | DEUTSCH 38999 Series III Composite Connectors







Customers Also Bought



DEUTSCH 38999 Series III Composite Connectors, Standard Circular Connectors, Cable-to-Panel, 5 Position, Sealable, Wire & Cable



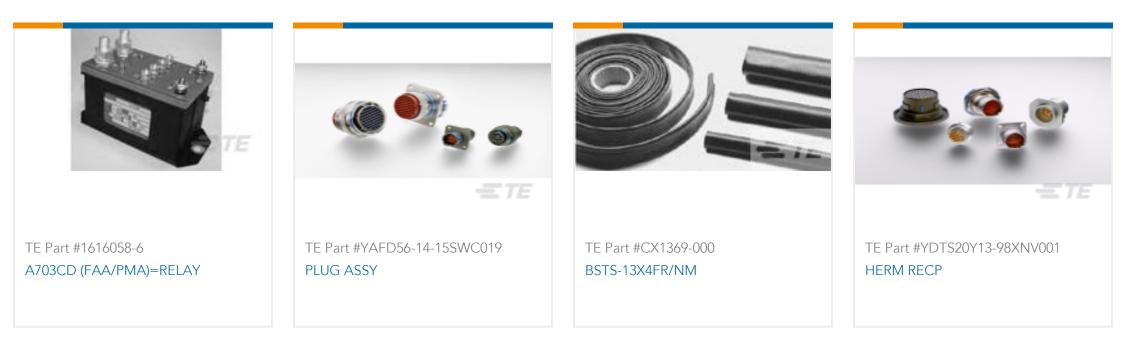

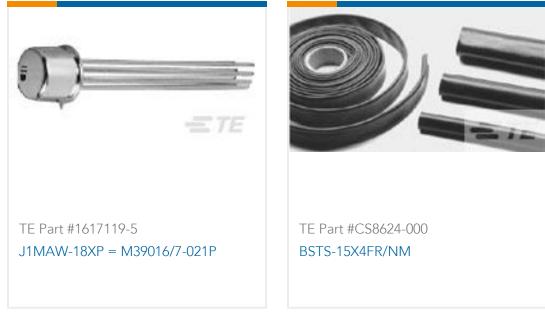

Documents

Product Drawings JAM NUT RECEPTACLE

English

Datasheets & Catalog Pages DEUTSCH MIL-DTL-38999 Connectors Quick Reference Guide

English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: D38999/24JB05SE