DTS26G13-35SD [V001] ACTIVE

DEUTSCH | DEUTSCH 38999 Series III

TE Internal #: YDTS26G13-35SDV001

DEUTSCH 38999 Series III, Standard Circular Connectors, Cable-to-

Panel, 22 Position, Sealable, Wire & Cable, 5A Contact Current

Rating (Max), Signal

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors > D38999: Straight Plug, 13-35 Insert



Connector System: Cable-to-Panel

Number of Positions: 22

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 5 A

All D38999: Straight Plug, 13-35 Insert (84)

Features

Product Type Features

Shell Plating Material

Circular Connector Insulation Material Type

Shell Base Material

Hermetically Sealed

Product Type	Connector
Connector System	Cable-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Straight Plug
Configuration Features	
Number of Positions	22
Number of Power Positions	0
Number of Signal Positions	22
Contacts Preloaded	Yes
Body Features	

Space-Grade Electroless

Hard Dielectric/Silicone

Aluminum

No



Contact Features

Contact Current Rating (Max)	5 A
Contact Layout Arrangement	13 – 35
Circular Connector Contact Type	Socket

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
Polarization Code	D
Mating Alignment Type	Keyed
Mating Retention	With

Housing Features

Circular Connector Shell Size	13
Alignment Keyed	Clocking

Dimensions

Wire Size	$.0833 \text{ mm}^2$

Usage Conditions

Operation/Application

Circuit Application	Signal
Shielded	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC Compliant with Exemptions China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in Contact Lead-Copper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert subassembly) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling, Recycle fipossible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.		
China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in Contact Lead-Copper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert subassembly) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable	EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in Contact Lead-Copper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert subassembly) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable	EU ELV Directive 2000/53/EC	Compliant with Exemptions
(219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in Contact Lead-Copper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert subassembly) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
	EU REACH Regulation (EC) No. 1907/2006	(219) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (1.2% in Contact Lead-Copper Alloy) Decamethylcyclopentasiloxane (D5) (5% in Insert subassembly) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable



Halogen Content

Not Yet Reviewed for halogen content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # CAT-D38999-DTS2X D38999: Square Flange, 13-35 insert



TE Part # CAT-D38999-DTS11R D38999: Jam Nut, 13-35 Insert

Also in the Series DEUTSCH 38999 Series III



Customers Also Bought












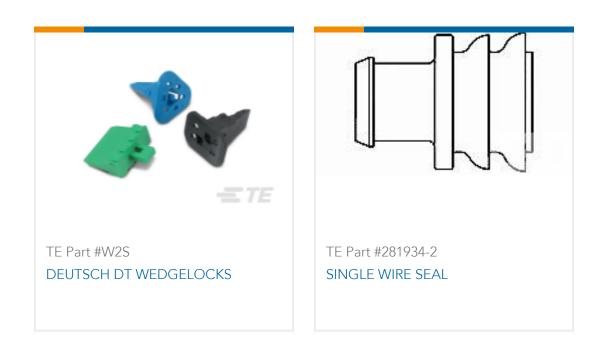

Documents

Product Drawings

PLUG ASSY

English

Datasheets & Catalog Pages

DEUTSCH MIL-DTL-38999 CIRCULAR CONNECTORS

English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: D38999/26GC35SD