



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	D	REVISED PER ECO-05-013873	16NOV05	BM JL

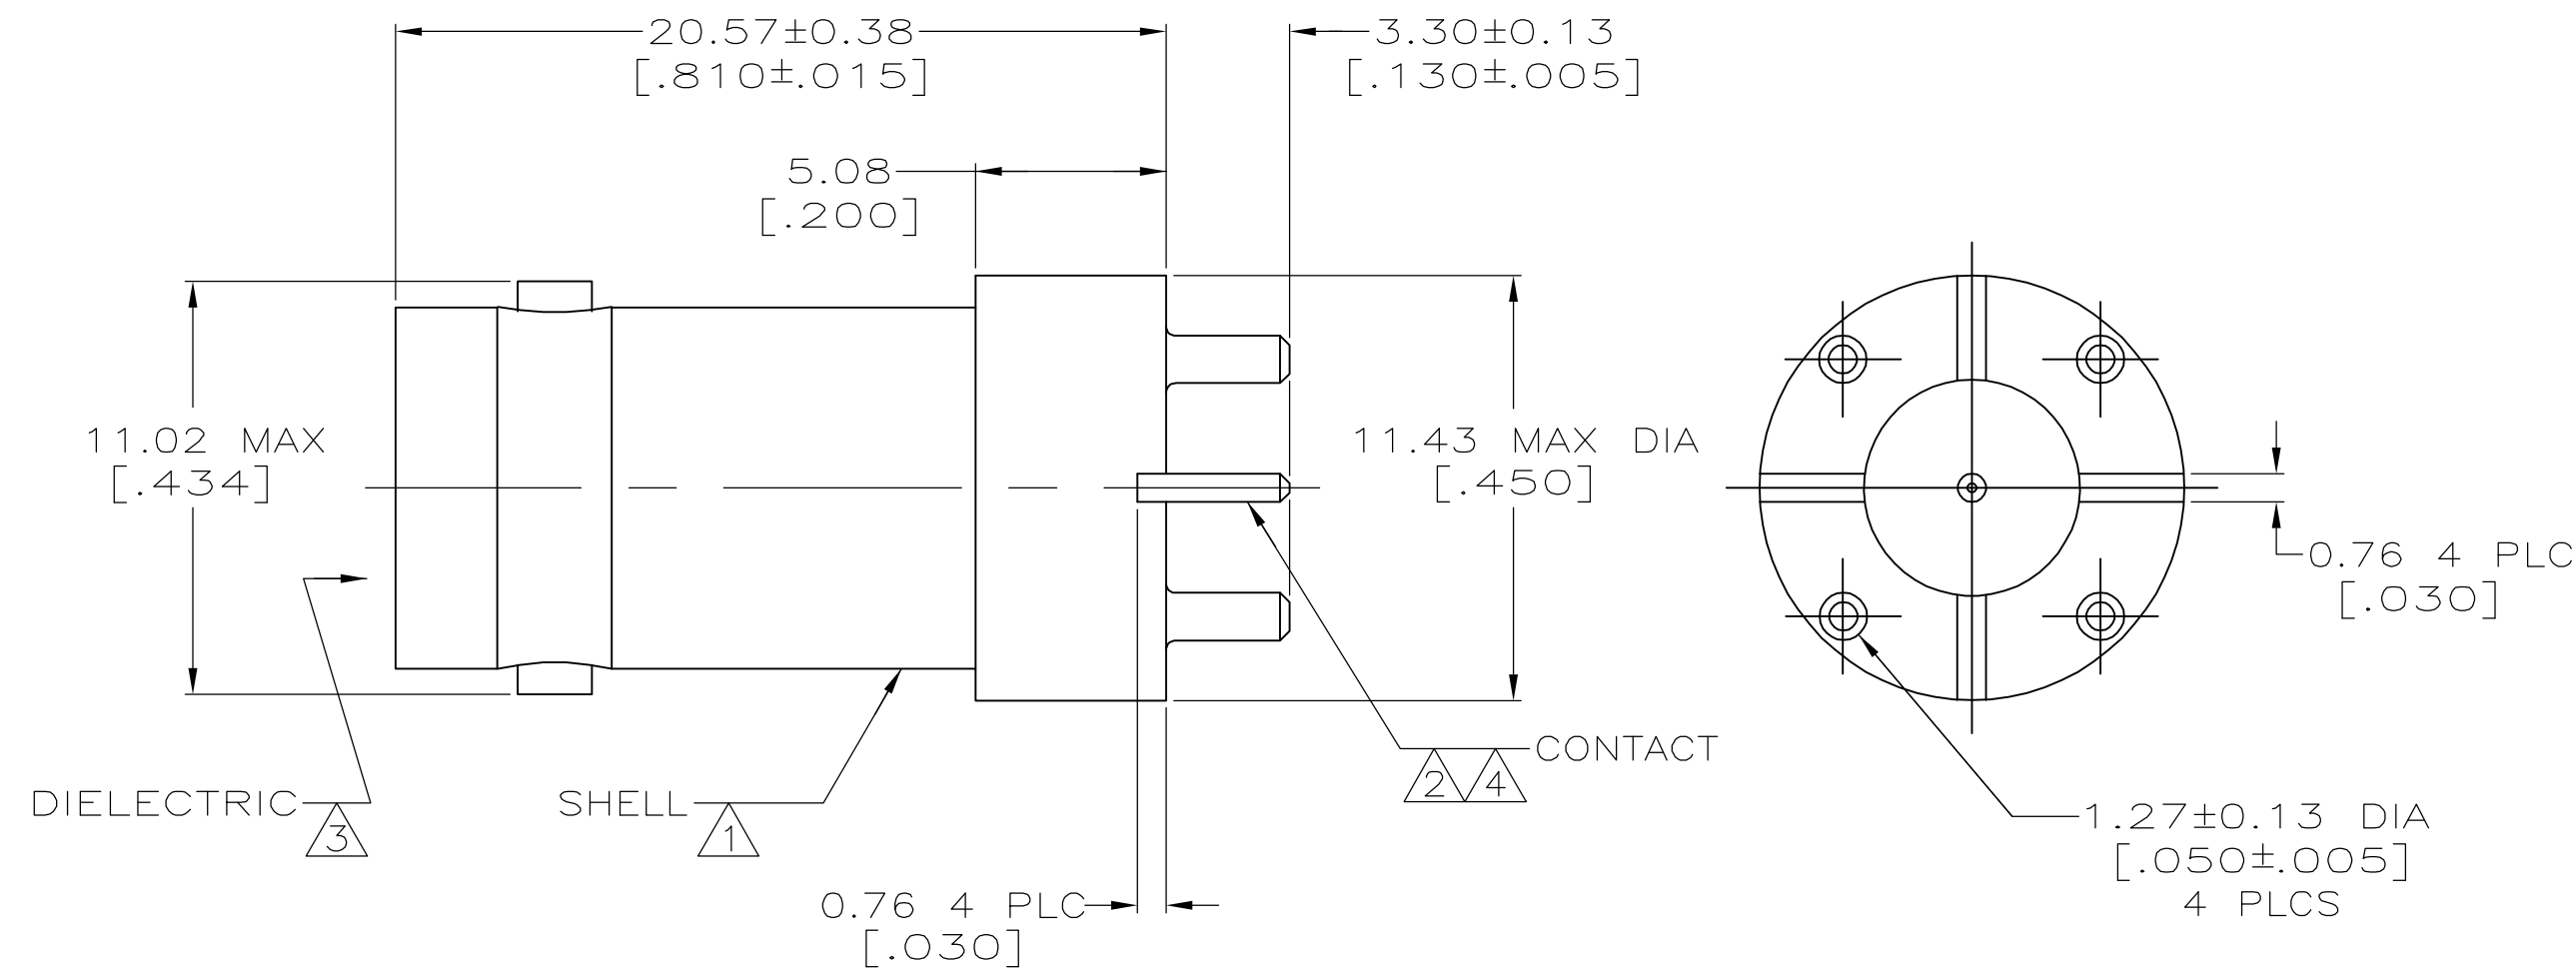

- 1 ZINC PER QQ-Z-363
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 PTFE PER MIL-P-19468
- 4 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 5 TIN-LEAD PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.
- 7. SEE INSTRUCTION SHEET 408-9889.

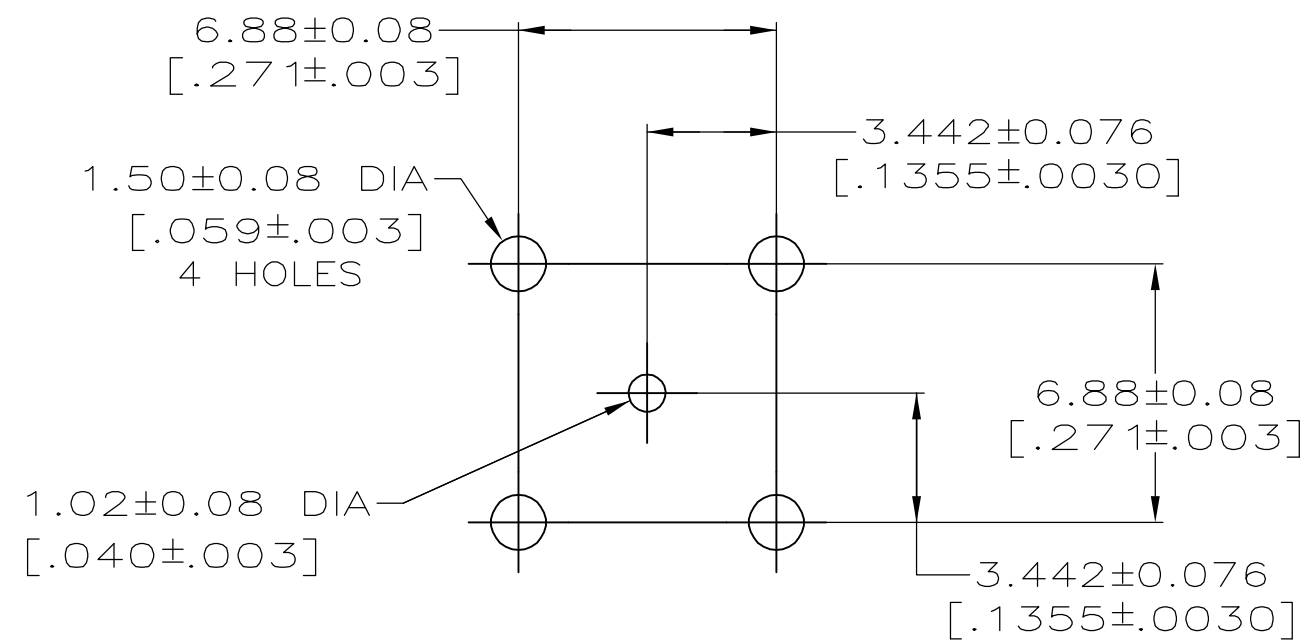

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 1-19-99	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK J. LIPPERT 3-11-99	NAME JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT 3-11-99	SIZE A2	
0 PLC ± -		PRODUCT SPEC 108-12078	CAGE CODE 00779	DRAWING NO C=1274291
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO	
2 PLC ± 0.20 [.008]		WEIGHT -	SCALE 5:1	
3 PLC ± -		SHEET 1 of 1		
4 PLC ± -		REV D		
ANGLES ± -		RESTRICTED CUSTOMER		
FINISH SEE NOTES 1 - 3		SEE NOTES 4, 5		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1274291-1](#)