

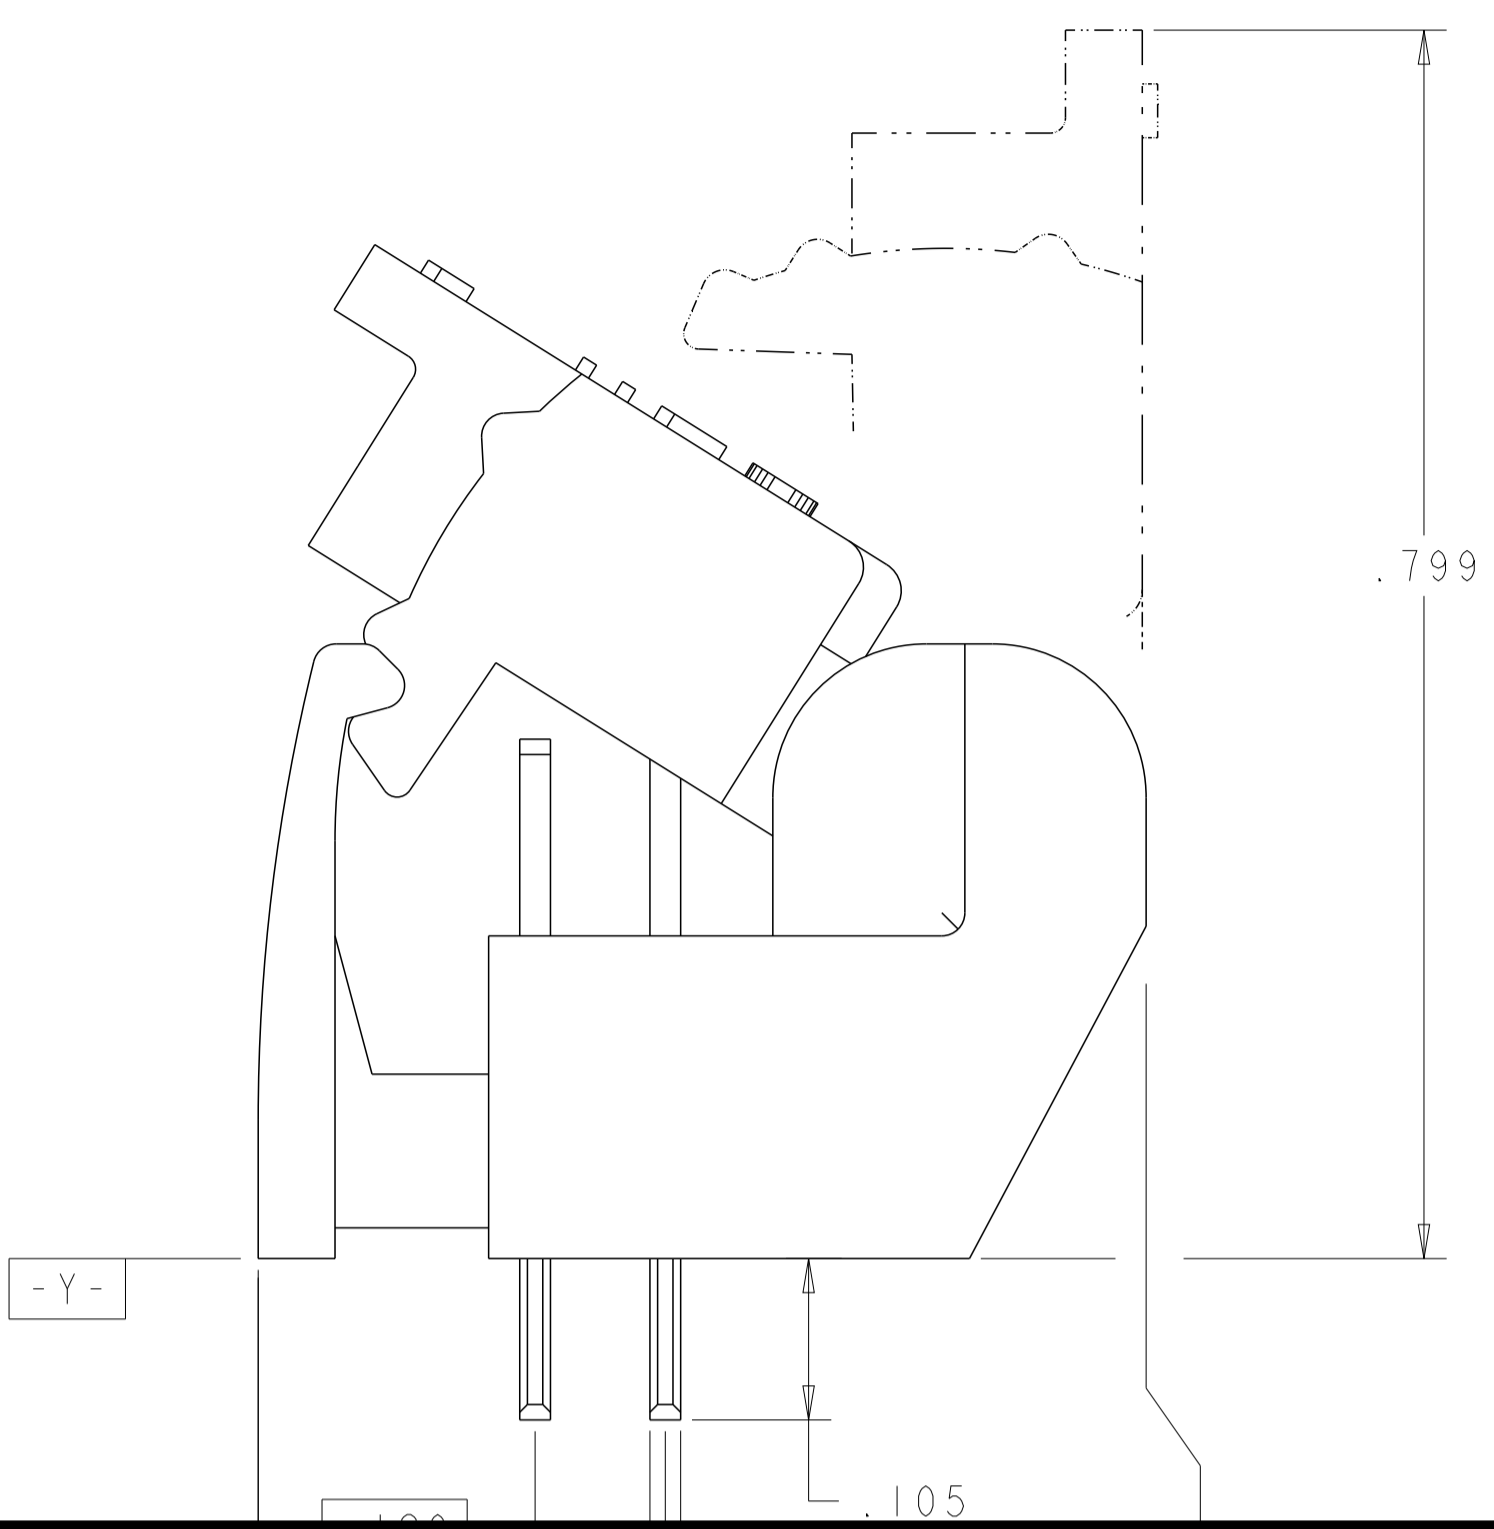
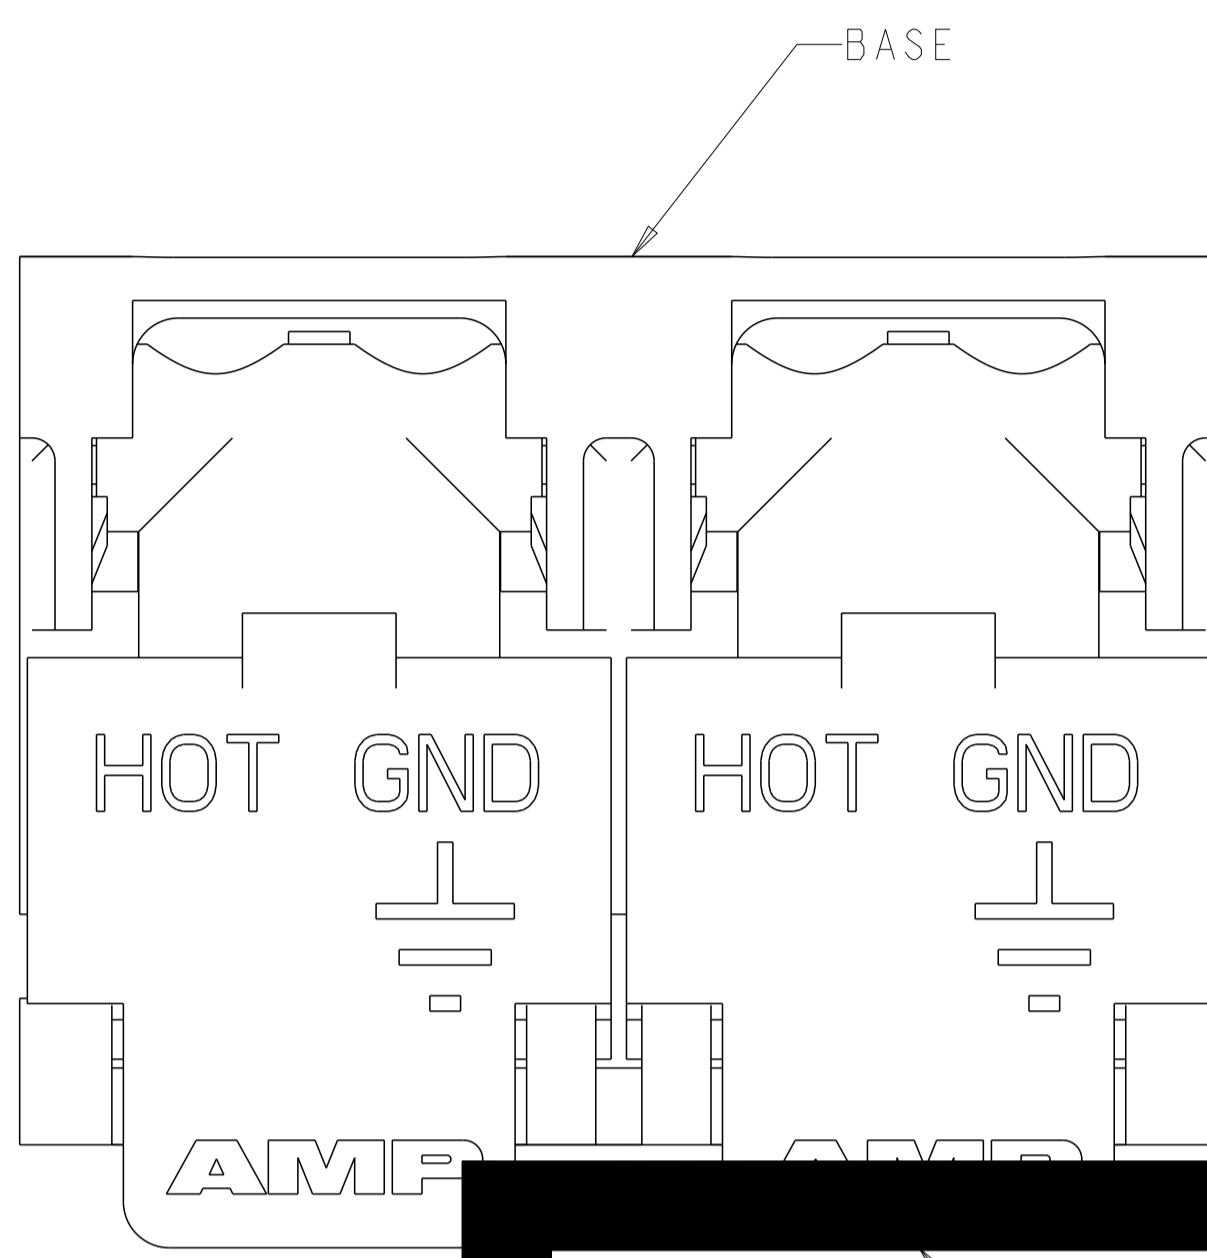


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
D1		REVISED ECR-19-019743	02JUN2020	J. J. W. H.

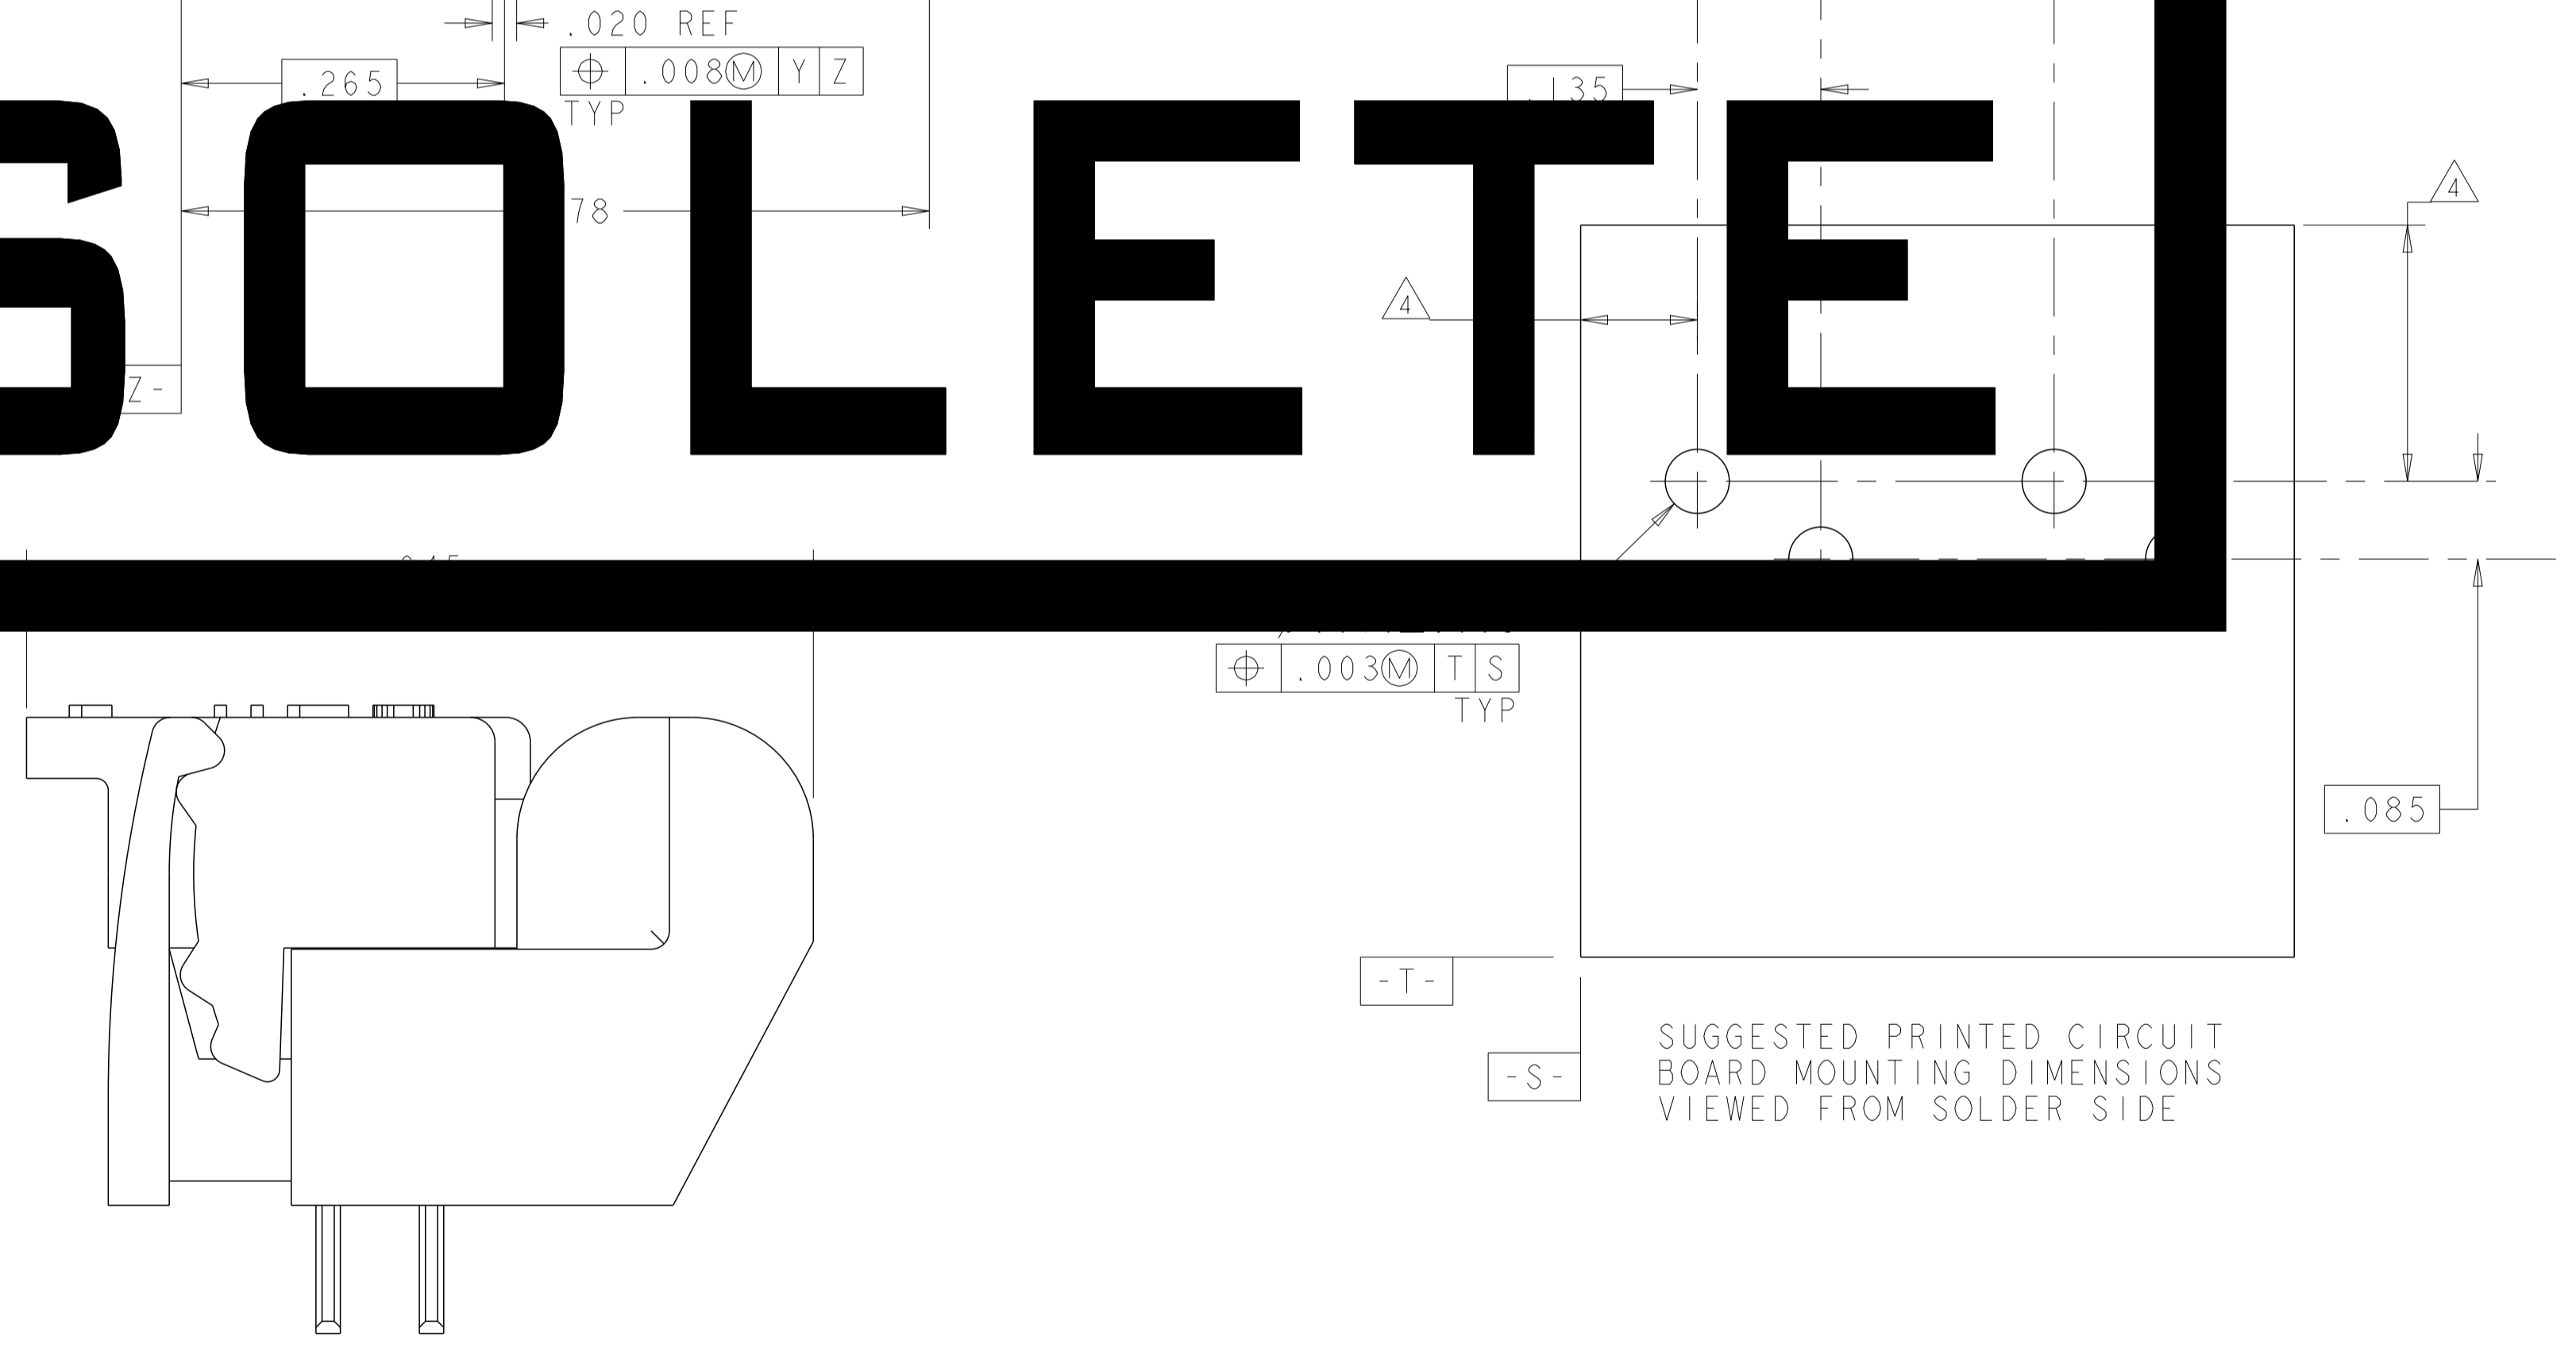

- ⚠ MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK.
WIRE STUFFER: - POLYESTER MOLDING COMPOUND, BLACK.
TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER 22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM .060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
- 3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- ⚠ LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER REQUIREMENTS.

OBSOLETE

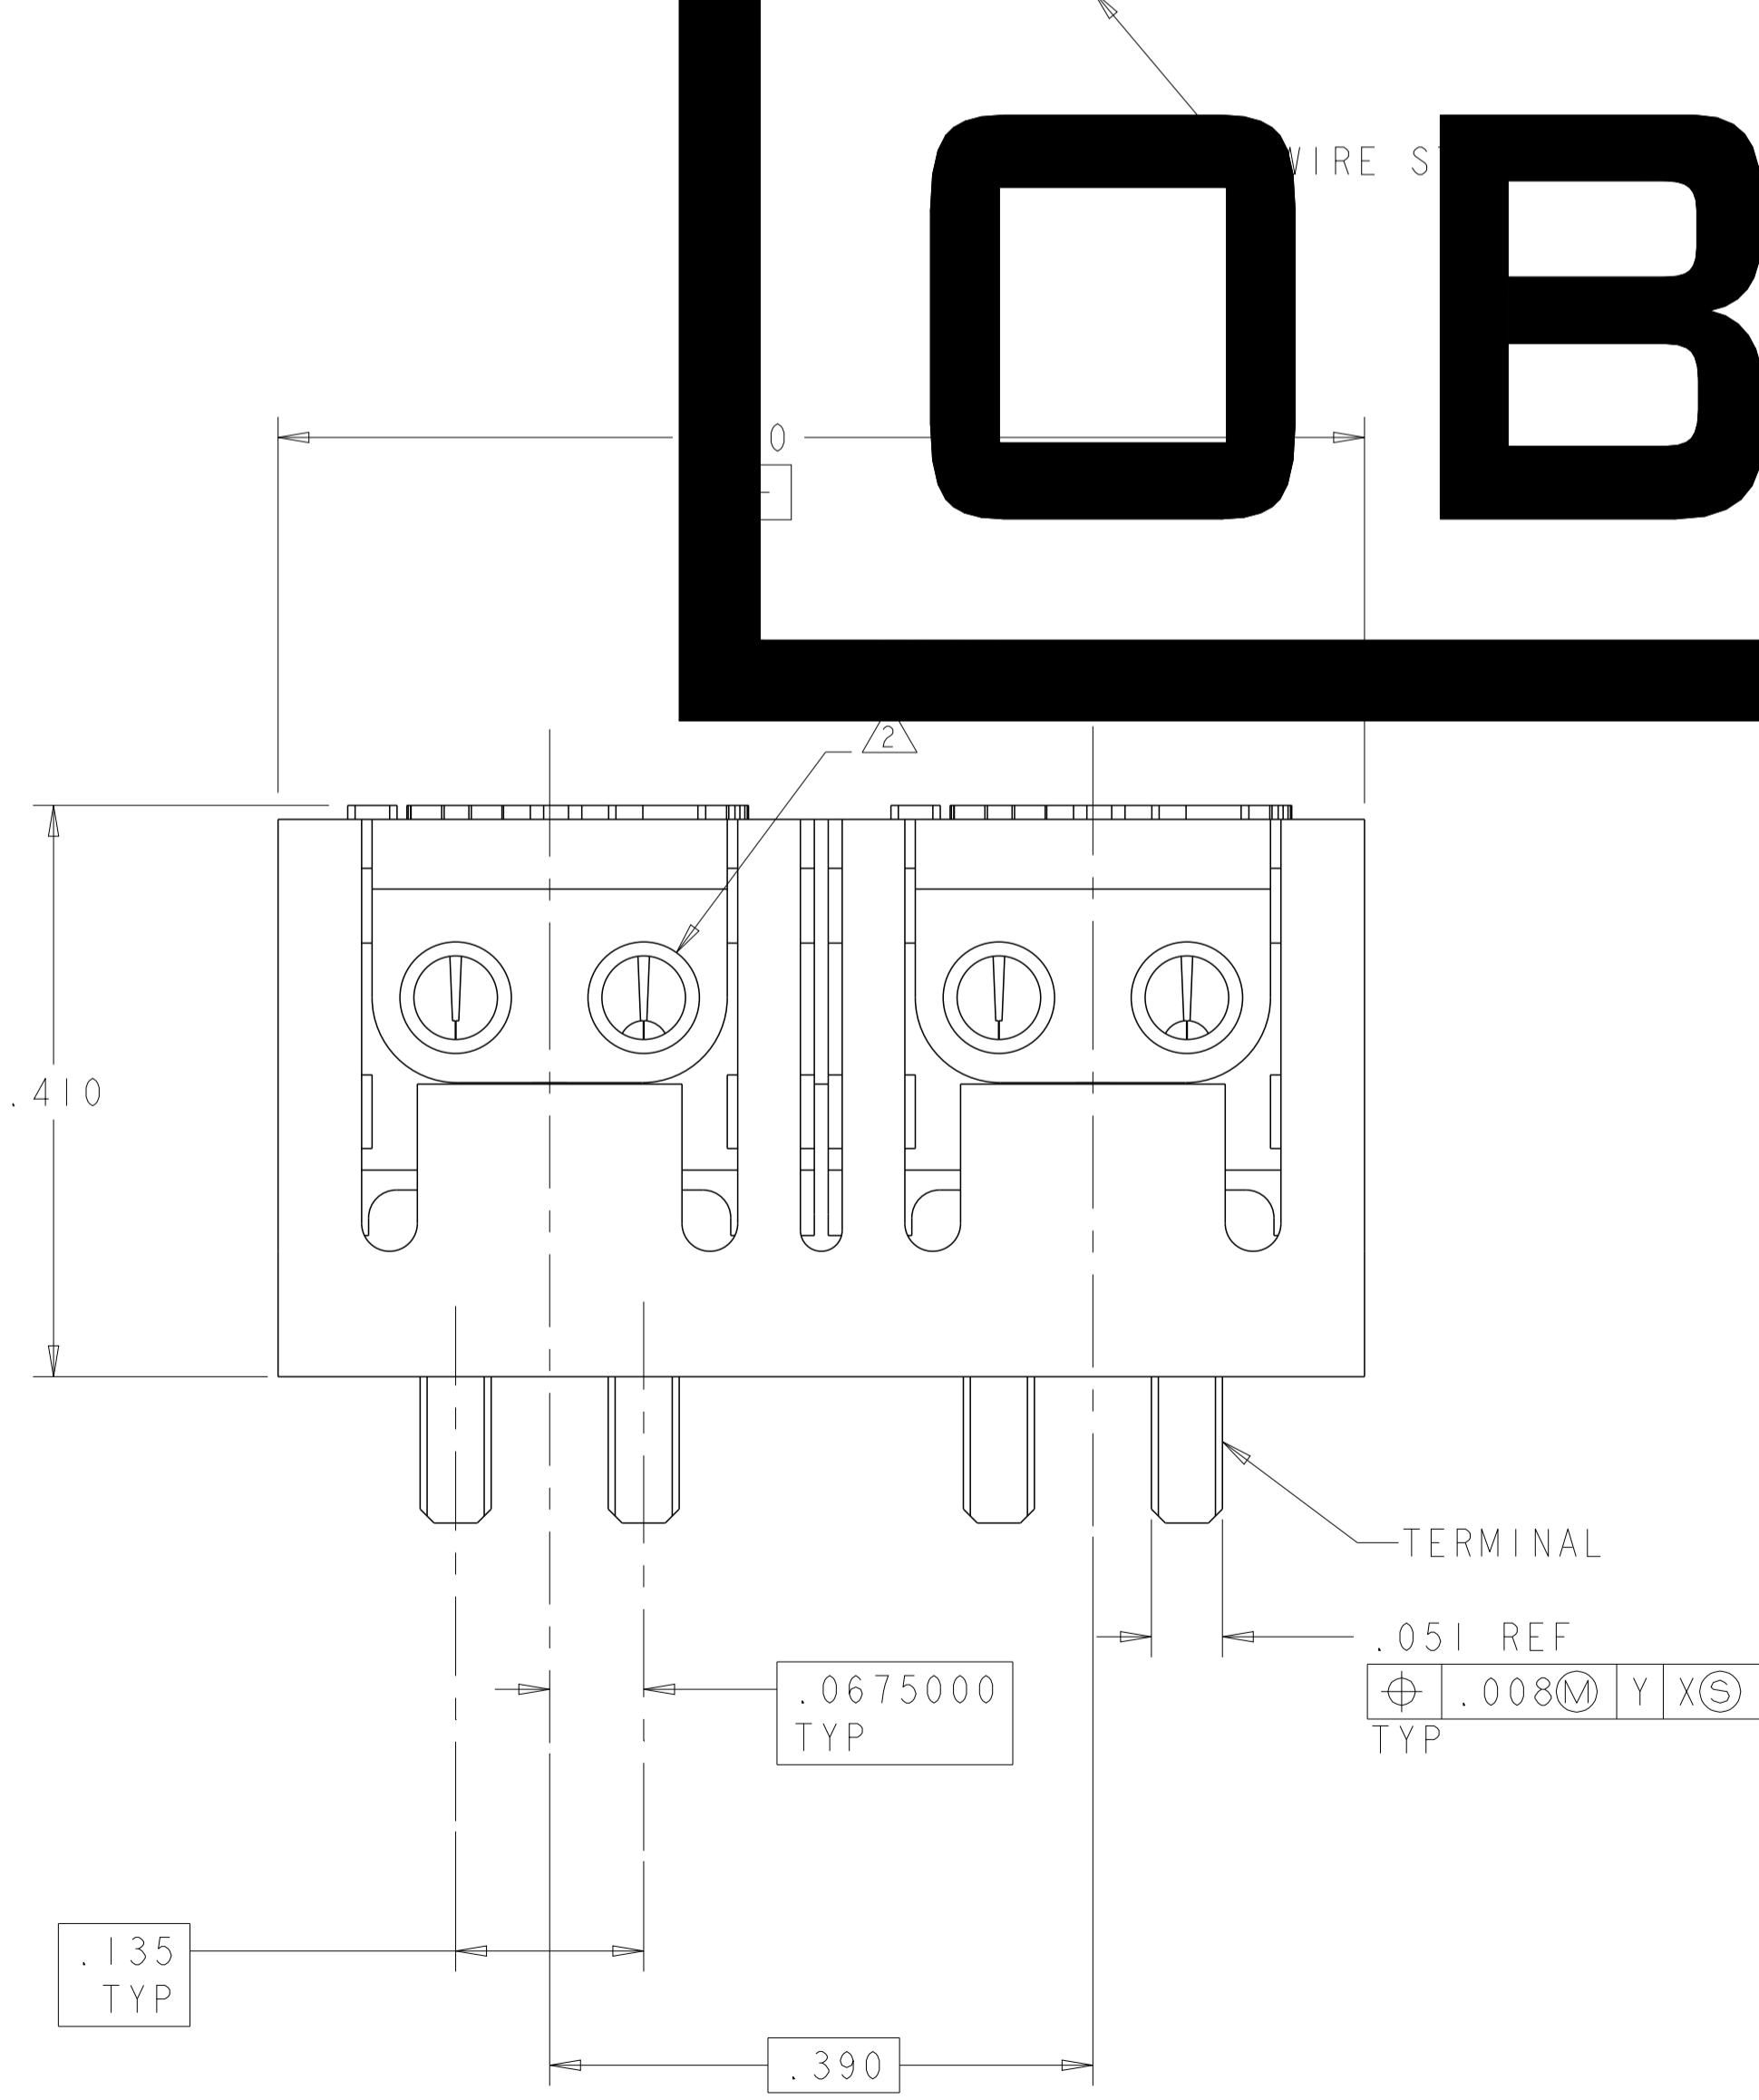

SUGGESTED PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS VIEWED FROM SOLDER SIDE

CLOSED POSITION

1339313-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. ZARBOCK 28APR00	TE TE Connectivity	
DIMENSIONS: INCHES		CHK M. DERSTINE 28APR00		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. DERSTINE 28APR00	NAME ASSEMBLY, DOUBLE PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR	
0 PLC ±	1 PLC ±.01	PRODUCT SPEC	SIZE A 00779 C=1339313	
2 PLC ±.01	3 PLC ±.005	APPLICATION SPEC	RESTRICTED TO	
4 PLC ±	ANGLES ±	WEIGHT	SCALE 8:1 SHEET 1 OF 1 REV D1	
MATERIAL	FINISH	CUSTOMER DRAWING		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1339313-1](#)