
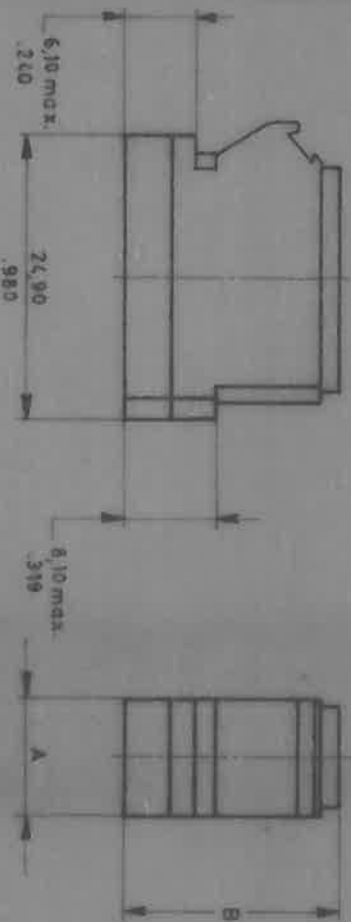


RENSEIGNEMENTS SUR LES CONTACTS

RÉFÉRENCE	JAUGE	JAUGE DU CABLE(AWG)	SECTION DES CABLES(mm ²)	ÉTANCHÉITÉ ASSURÉE POUR			C +0,08		D max.		E max.		Poids		
				∅ extér. min. in.	∅ extér. min. mm	∅ extér. max. in.	∅ extér. max. mm	in.	mm	in.	mm	lbs	g.		
1000.50.56	22	26.24.22	0.18 - 0.30	.033	0.84	.049	1.25	.057	1.44	.320	8.32	.155	3.95	.00013	0.06
1841.1.5620	20	24.22.20	0.21 - 0.93	.040	1.05	.083	2.10	.100	2.54	.288	7.31	.165	4.20	.00287	0.13
1841.1.5615	16	20.18.16	0.60 - 1.34	.068	1.75	.103	2.50	.130	3.30	.388	9.85	.250	6.35	.00685	0.31
1841.1.5612	12	14.12	1.91 - 3.39	.106	2.70	.158	4.00	.187	4.75	.428	10.85	.252	6.40	.0165	0.75

RÉFÉRENCE	A max.		B max.		Poids	
	in.	mm	in.	mm	lbs	g.
FMJ 11E.22.***	.396	10.05	.806	20.47	.0143	6.5
FMJ 11E.20.***	.386	10.05	.765	19.42	.0118	6.7
FMJ 11E.16.***	.475	12.05	.765	19.42	.0172	7.8
FMJ 11E.12.***	.583	15.05	.947	24.05	.0224	10.2



Compagnie DEUTSCH

Vises

MODULES DE JONCTION ET CONTACTS

Tailles 22, 20, 16, 12



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[ZPF00000000020140](#)