



Wi-Fi 6/ 6E TRIPLE BAND EMBEDDED ANTENNA

Part Numbers: 2118907-1, 2118907-2 2118907-3, 2118907-4, 2118907-5 2118907-6, 2118907-7, 2118907-8 2118907-9


FEATURES & BENEFITS

- Wi-Fi 6, also including WiFi 6E new 6GHz band, Bluetooth, ZigBee
- Flexible PCB antenna assembly
- Adhesive backing on the flexible PCB simplifies mounting within the device
- Global Frequency coverage
- Different cable length and connector options available

SPECIFICATIONS (Shown as 2118907-1: Others can vary with different cable lengths.)

VSWR < 1.4:1 < 1.6:1 < 1.9:1 Average Efficiency 82% 73% 66% Peak Gain 3.3 dBi 3.2 dBi 4.4 dBi Average Gain -0.9dBi -1.4dBi -1.8dBi Power Handling 10 Watt cw Feed Point Impedance 50 ohms unbalanced Polarization Linear Size 29.60 mm x 41.24 mm x 0.34 mm Weight < 3.3 g Mounting Adhesive Tape Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable : 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C						
Average Efficiency 82% 73% 66% Peak Gain 3.3 dBi 3.2 dBi 4.4 dBi Average Gain -0.9dBi -1.4dBi -1.8dBi Power Handling 10 Watt cw Feed Point Impedance 50 ohms unbalanced Polarization Linear Size 29.60 mm x 41.24 mm x 0.34 mm Weight < 3.3 g	Frequency Range (MHz)	2400-2500	5150-5875	5925-7125		
Peak Gain 3.3 dBi 3.2 dBi 4.4 dBi Average Gain -0.9dBi -1.4dBi -1.8dBi Power Handling 10 Watt cw 50 ohms unbalanced Linear 29.60 mm x 41.24 mm x 0.34 mm Weight < 3.3 g Mounting Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature A certificate of conformance is available from the	VSWR	< 1.4:1	< 1.6:1	< 1.9:1		
Average Gain -0.9dBi -1.4dBi -1.8dBi 10 Watt cw Feed Point Impedance 50 ohms unbalanced Linear Size 29.60 mm x 41.24 mm x 0.34 mm Veight Adhesive Tape Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable : 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature Average Gain -1.4dBi -1.8dBi -1.8dB	Average Efficiency	82%	73%	66%		
Power Handling Feed Point Impedance Foo ohms unbalanced Linear Size 29.60 mm x 41.24 mm x 0.34 mm Veight < 3.3 g Mounting Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature A certificate of conformance is available from the	Peak Gain	3.3 dBi	3.2 dBi	4.4 dBi		
Feed Point Impedance Polarization Linear 29.60 mm x 41.24 mm x 0.34 mm Veight < 3.3 g Mounting Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature A certificate of conformance is available from the	Average Gain	-0.9dBi	-1.4dBi	-1.8dBi		
Polarization Linear 29.60 mm x 41.24 mm x 0.34 mm Weight < 3.3 g Mounting Adhesive Tape Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C A certificate of conformance is available from the	Power Handling	10 Watt cw				
Size 29.60 mm x 41.24 mm x 0.34 mm < 3.3 g Mounting Adhesive Tape MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C A certificate of conformance is available from the	Feed Point Impedance	50 ohms unbalanced				
Weight < 3.3 g Mounting Adhesive Tape Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C Hazardous Materials A certificate of conformance is available from the	Polarization	Linear				
Mounting Adhesive Tape MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable : 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C A certificate of conformance is available from the	Size	29.60 mm x 41.24 mm x 0.34 mm				
Mating Connector MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable: 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C A certificate of conformance is available from the	Weight	< 3.3 g				
MHF4L-type receptacle (TE PN: 2334884-1) Cable Coaxial Cable : 1.13mm Dia. Operating Temperature -40 to +85°C Storage Temperature -40 to +85°C Hazardous Materials A certificate of conformance is available from the	Mounting	Adhesive Tape				
Operating Temperature -40 to +85°C -40 to +85°C Hazardous Materials A certificate of conformance is available from the	Mating Connector					
Storage Temperature -40 to +85°C Hazardous Materials A certificate of conformance is available from the	Cable	Coaxial Cable : 1.13mm Dia.				
Hazardous Materials A certificate of conformance is available from the	Operating Temperature	-40 to +85°C				
	Storage Temperature	-40 to +85°C				
	Hazardous Materials					

RF DATA (Shown as 2118907-1 : Others can vary with different cable lengths.)

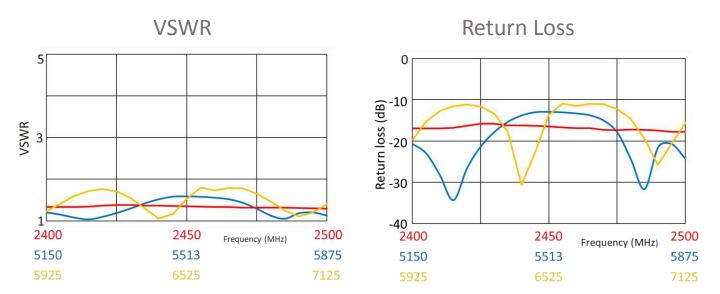




Data measured in free space and on plastic device enclosure


RADIATION PATTERN

(Shown as 2118907-1: Others can vary with different cable lengths.)

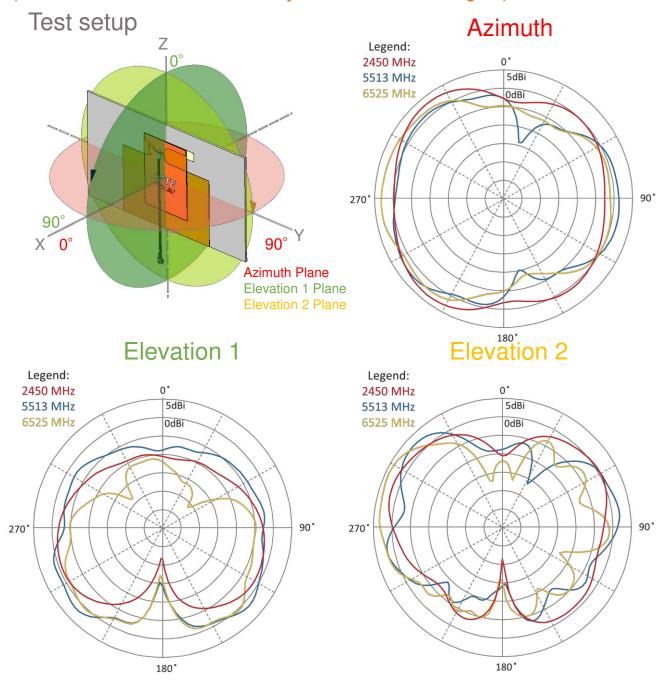

Data measured in free space and on plastic device enclosure

MOUNTING GUIDE

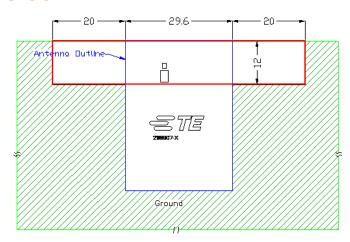

NOTES: 1. No copper allowed in designated area on all PCB layers –


2. For more information please call TE.

Dimensions: mm Diagram is not to scale

KEEP OUT AREA

Scound Scound Scound Scound 10.00(2X) 5.00(2X) 5.00(2X)

DIMENSIONS

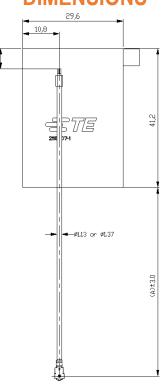


1.8 MAX 0,4 INCLUDING ADHESIVE

Dimensions: mm Diagram is not to scale

MATING COMPONENTS

2118907-1	115.0	4.527	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118907-2	50.0	1.968	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118907-3	100.0	3.937	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118907-4	150.0	5.905	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118907-5	200.0	7.784	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118907-6	50.0	1.968	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118907-7	100.0	3.937	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118907-8	150.0	5.905	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118907-9	200.0	7.784	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
PART	MM	INCH	CONNECTOR TYPE	PART NUMBER	IMAGE
NUMBER	CABLE LI	ENGTH(A)	(ON CABLE)	MATING COMPONENTS	

PACKAGING

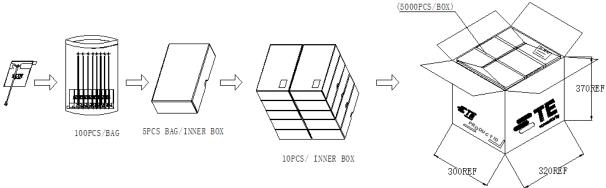

10PCS INNER BOX

TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 Mexico: +52 (0) 55-1106-0800 Latin/S. America: +54 (0) 11-4733-2200 Germany: +49 (0) 6251-133-1999 UK: +44 (0) 800-267666 France: +33 (0) 1-3420-8686 +31 (0) 73-6246-999 Netherlands: China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

12/2020



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 2118907-5