SAFETY DRGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS

UL RECOGNIZED: UL 1283 (TRACEABLE TO F434))

CSA CERTIFIED: CSA 22.2, # 0,0.4,8 (TRACEABLE TO F4341)

VDE APPROVED: EN 133 200 (TRACEABLE TO F4341)

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP/40°C, 120/250 VAC

I THE EREGUENCY:

DIFF.

dB

15 13 20 61

50~60Hz

MAXIMUM LEAKAGE CURRENT.

EACH LINE TO GROUND:

0.15 mA @ 120V 50Hz

0.28 mA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In. IN AN AMBIENT, I_0 , Higher than 40°C, the maximum operating current, I_0 , is as follows: $I_0 = I_0$, $I_0 = I_0$

100 - Ta $I_0 = I_r$

RELIABILITY SPECIFICATIONS:

STURAGE TEMPERATURE: -40°C TD +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES IN FOR 8 SECONDS

CUSTOMER DRAWING CATALOG # 15VRK1 EC # IAPPRVO. DATE 07-026900 PJD 13NDV07

TEST SPECIFICATIONS:

INDUCTANCE: 5.04 mH NOMINAL CAPACITANCE: (HEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: LINE TO LINE:

0.0044 µF ±20% 0.741 µF±20%

DISCHARGE RESISTOR:

1.0MA

L/G AND L/L T R

NO DISCHARGE RESISTOR: 6000M ← (MIN.) @ 100VDC,


20°E AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FDR | MINUTE LINE TO LINE: 1450 VOC FOR I MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE LINIT IN YOUR EQUIPMENT.

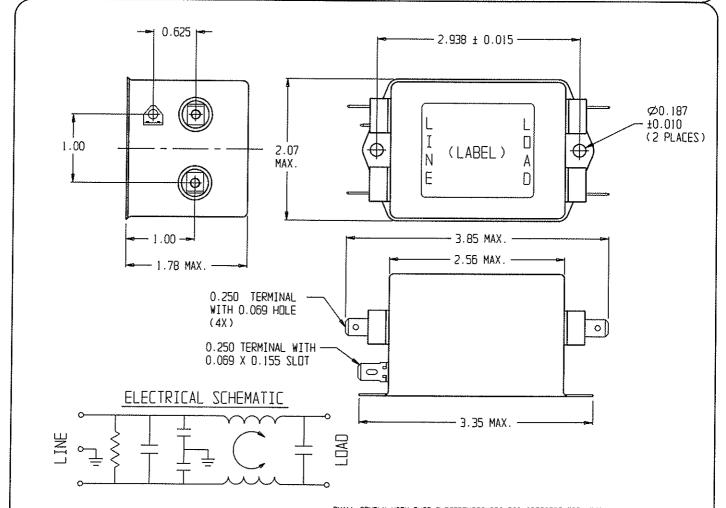

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES 50_-50 (MINIMUM) INSERTION $\Gamma \square ZZ$ THIRD ANGLE PROJECTION **Tyco Electronics**

FREDLIENCY .05 .10 .15 .50 1.0 2.0 5.0 10 20 30 UNLESS OTHERWISE SPECIFIED, HHz TOLERANCE TO BE ±.025 COMMON MATERIAL & FINISH: AS SUPPLIED 21 28 31 45 43 41 42 42 47 57 dΒ

> 72 64 50

70

76 88 THIS IMPORATION IS CONFIDENTIA, AND PROPRIETARY TO
THIS IMPORATION IS CONFIDENTIA, AND PROPRIETARY TO
TYCO BECFRONICS CORPORATION AND ITS WORLDWISE SUBSIDIARIES
AND AFFILLABLES. IT MAY NOT BE DISCORDED IN ANOTHER THAN
TYCO BECFRONICS PROSONEL, WITHOUT WRITTEN AUTHORIZATION
PROM TYCO BECFRONICS CORPORATION.

CORCON PRODUCTS, 620 S. BUTTERFIELD RD. HUNDELEIN IL 60060

POWER LINE FILTER

TYCO ELECTRONICS PART NO. SCALE: NITE DATE: NTS DATE: DRY. BY: 15VRK1 DR16: 1 PJO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 5-1609114-7