

4805 (1/15)

А


D

С


В

1. CHARACTERISTIC IMPEDANCE: 100 ± 10 OHMS (MEASURED DIFFERENTIALLY)

LABEL INFORMATION:



 $\cancel{3}$ LABEL INFORMATION:



- TE CONNECTIVITY PART NO

4. SEE SHEET 2 FOR WIRING SCHEMATIC.

5. ROHS COMPLIANCE: PRODUCT AND PROCESSING MEETS REQUIREMENTS OF TE CONNECTIVITY SPECIFICATION TEC-138-702.

THIS D	RAWIN	G IS A
D	IMENSIO	NS:
	mm	
	\bigoplus	
MATERIAL		
	_	

	2032757-[] CT ATTACHED SFP+ XXXXXX		1		
OLDED STRAIN RELIEF					
: BLACK					
	24 AWG	15 +0.12 -0 METERS	1-2032757-6		
	24 AWG	14 +0.12 METERS	1-2032757-5		
	24 AWG	13 +0.12 13 -0 METERS	1-2032757-4		
	24 AWG	12 +0.12 12 -0 METERS	1-2032757-3		
	24 AWG	-0 11 +0.12 _0 METERS	1-2032757-2		
	28 AWG	10 + 0.12 METERS	1-2032757-1		
	28 AWG	9 +0.1 METERS	1-2032757-0		
	30 AWG	=0 8 +0.1 METERS	2032757-9		
	30 AWG	-0 7 +0.1 METERS	2032757-8		
	30 AWG	-0 6 +0.1 METERS	2032757-7		
	30 AWG	-0 5 +0.1 METERS	2032757-6		
	30 AWG	4 +0.08 METERS	2032757-5		
	30 AWG	-0 3 +0.08 -0 METERS	2032757-4		
	30 AWG	2 +0.08 2 -0 METERS	2032757-3		
	30 AWG	-0 1 +0.05 1 -0 METERS	2032757-2		
	30 AWG	-0 0.5 $+0.05$ Meters	2032757-1		
	CABLE		PART NO		
CONTROLLED DOCUMENT.	GAUGE DWN 20APR2009 T.SMITH CHK 20APR2009		E Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK 20APR2009 D.LAWRENCE APVD 20APR2009 D.LAWRENCE PRODUCT SPEC	NAME CABLE ASSY,SFP+	- TO SFP+		
$\begin{array}{c} 1 \ PLC \qquad \pm \ - \\ 2 \ PLC \qquad \pm \ - \\ 3 \ PLC \qquad \pm \ - \\ 4 \ PLC \qquad \pm \ - \\ 4 \ PLC \qquad \pm \ - \end{array}$	APPLICATION SPEC	NI_PLATE 	D RESTRICTED TO		
	w ^{eight} O CUSTOMER DRAWING	A 1 00779 C- 2032757	SHEET 1 OF REV F		
		I \.\			

1

DATE DWN APVE 28/mar/16 PY YM

D

В


А

REVISIONS

DESCRIPTION

E REVISED PER ECO-15-015186

P LTR

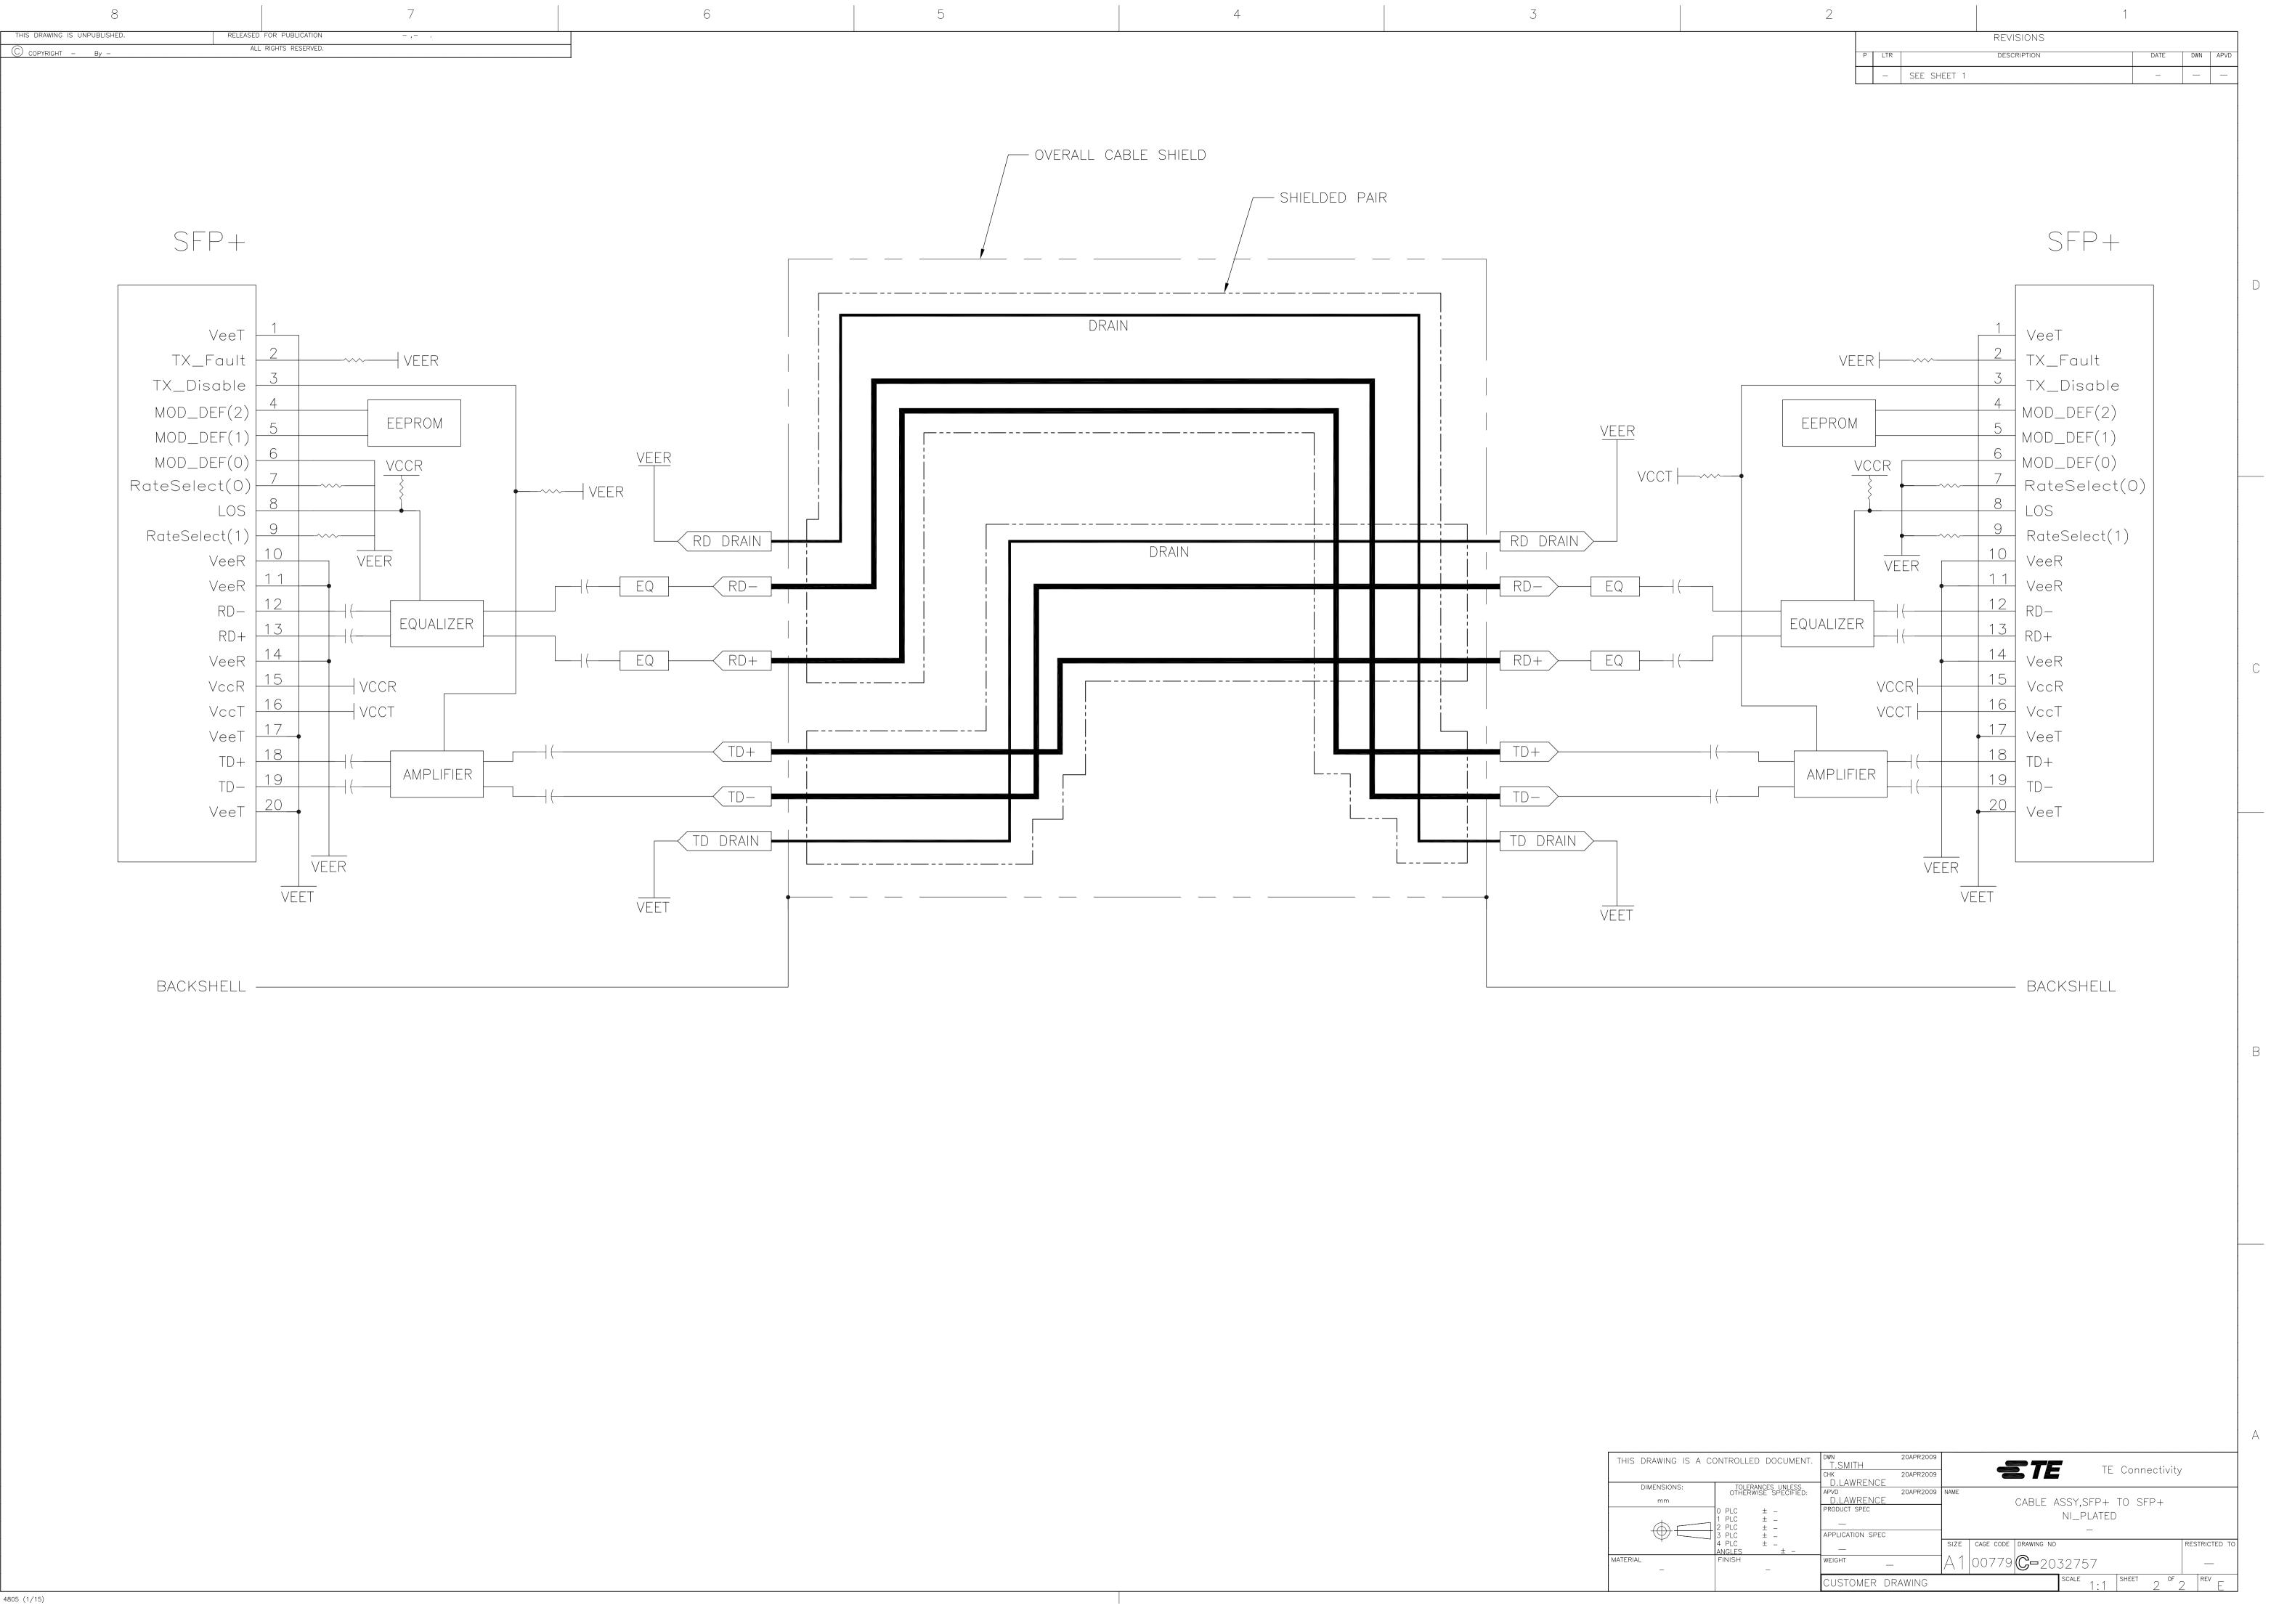

4805 (1/15)

А

 \square

С

В

THIS	DRAWING	IS A
	DIMENSIONS	S:
	mm	
	A.	
	ΨL	
MATERIA	L	
	-	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 2032757-7