INTERFACE ADAPTER

REVISIONS DESCRIPTION

DATE DWN APVO

A 66

1 DEVELOPMENT A RELEASED

02NOV2011 YY SX 27DEC2013 | YY | UG

B ECR-17-002450

20FEB2017 TB CT 29APR2019 LG TE

C | ECR-19-006847

2151186-2

7 - 2151186 - 1

7-2151186-2

7 - 2151186 - 7

FEED TYPE MECHANICAL

FINE CRIMP HEIGHT ADJUST PNEUMATIC

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. C) COPYRIGHT 20 PART DESCRIPTION REVISION NUMBER 2151186-1 FINE CRIMP HEIGHT ADJUST

MECHANICAL AND CRIMP

PNEUMATIC AND CRIMP


TOOLING KIT

TOOLING KIT CRIMP TOOLING KIT

ATLANTIC VERSION TERMINATOR

MECHANICAL

PNEUMATIC

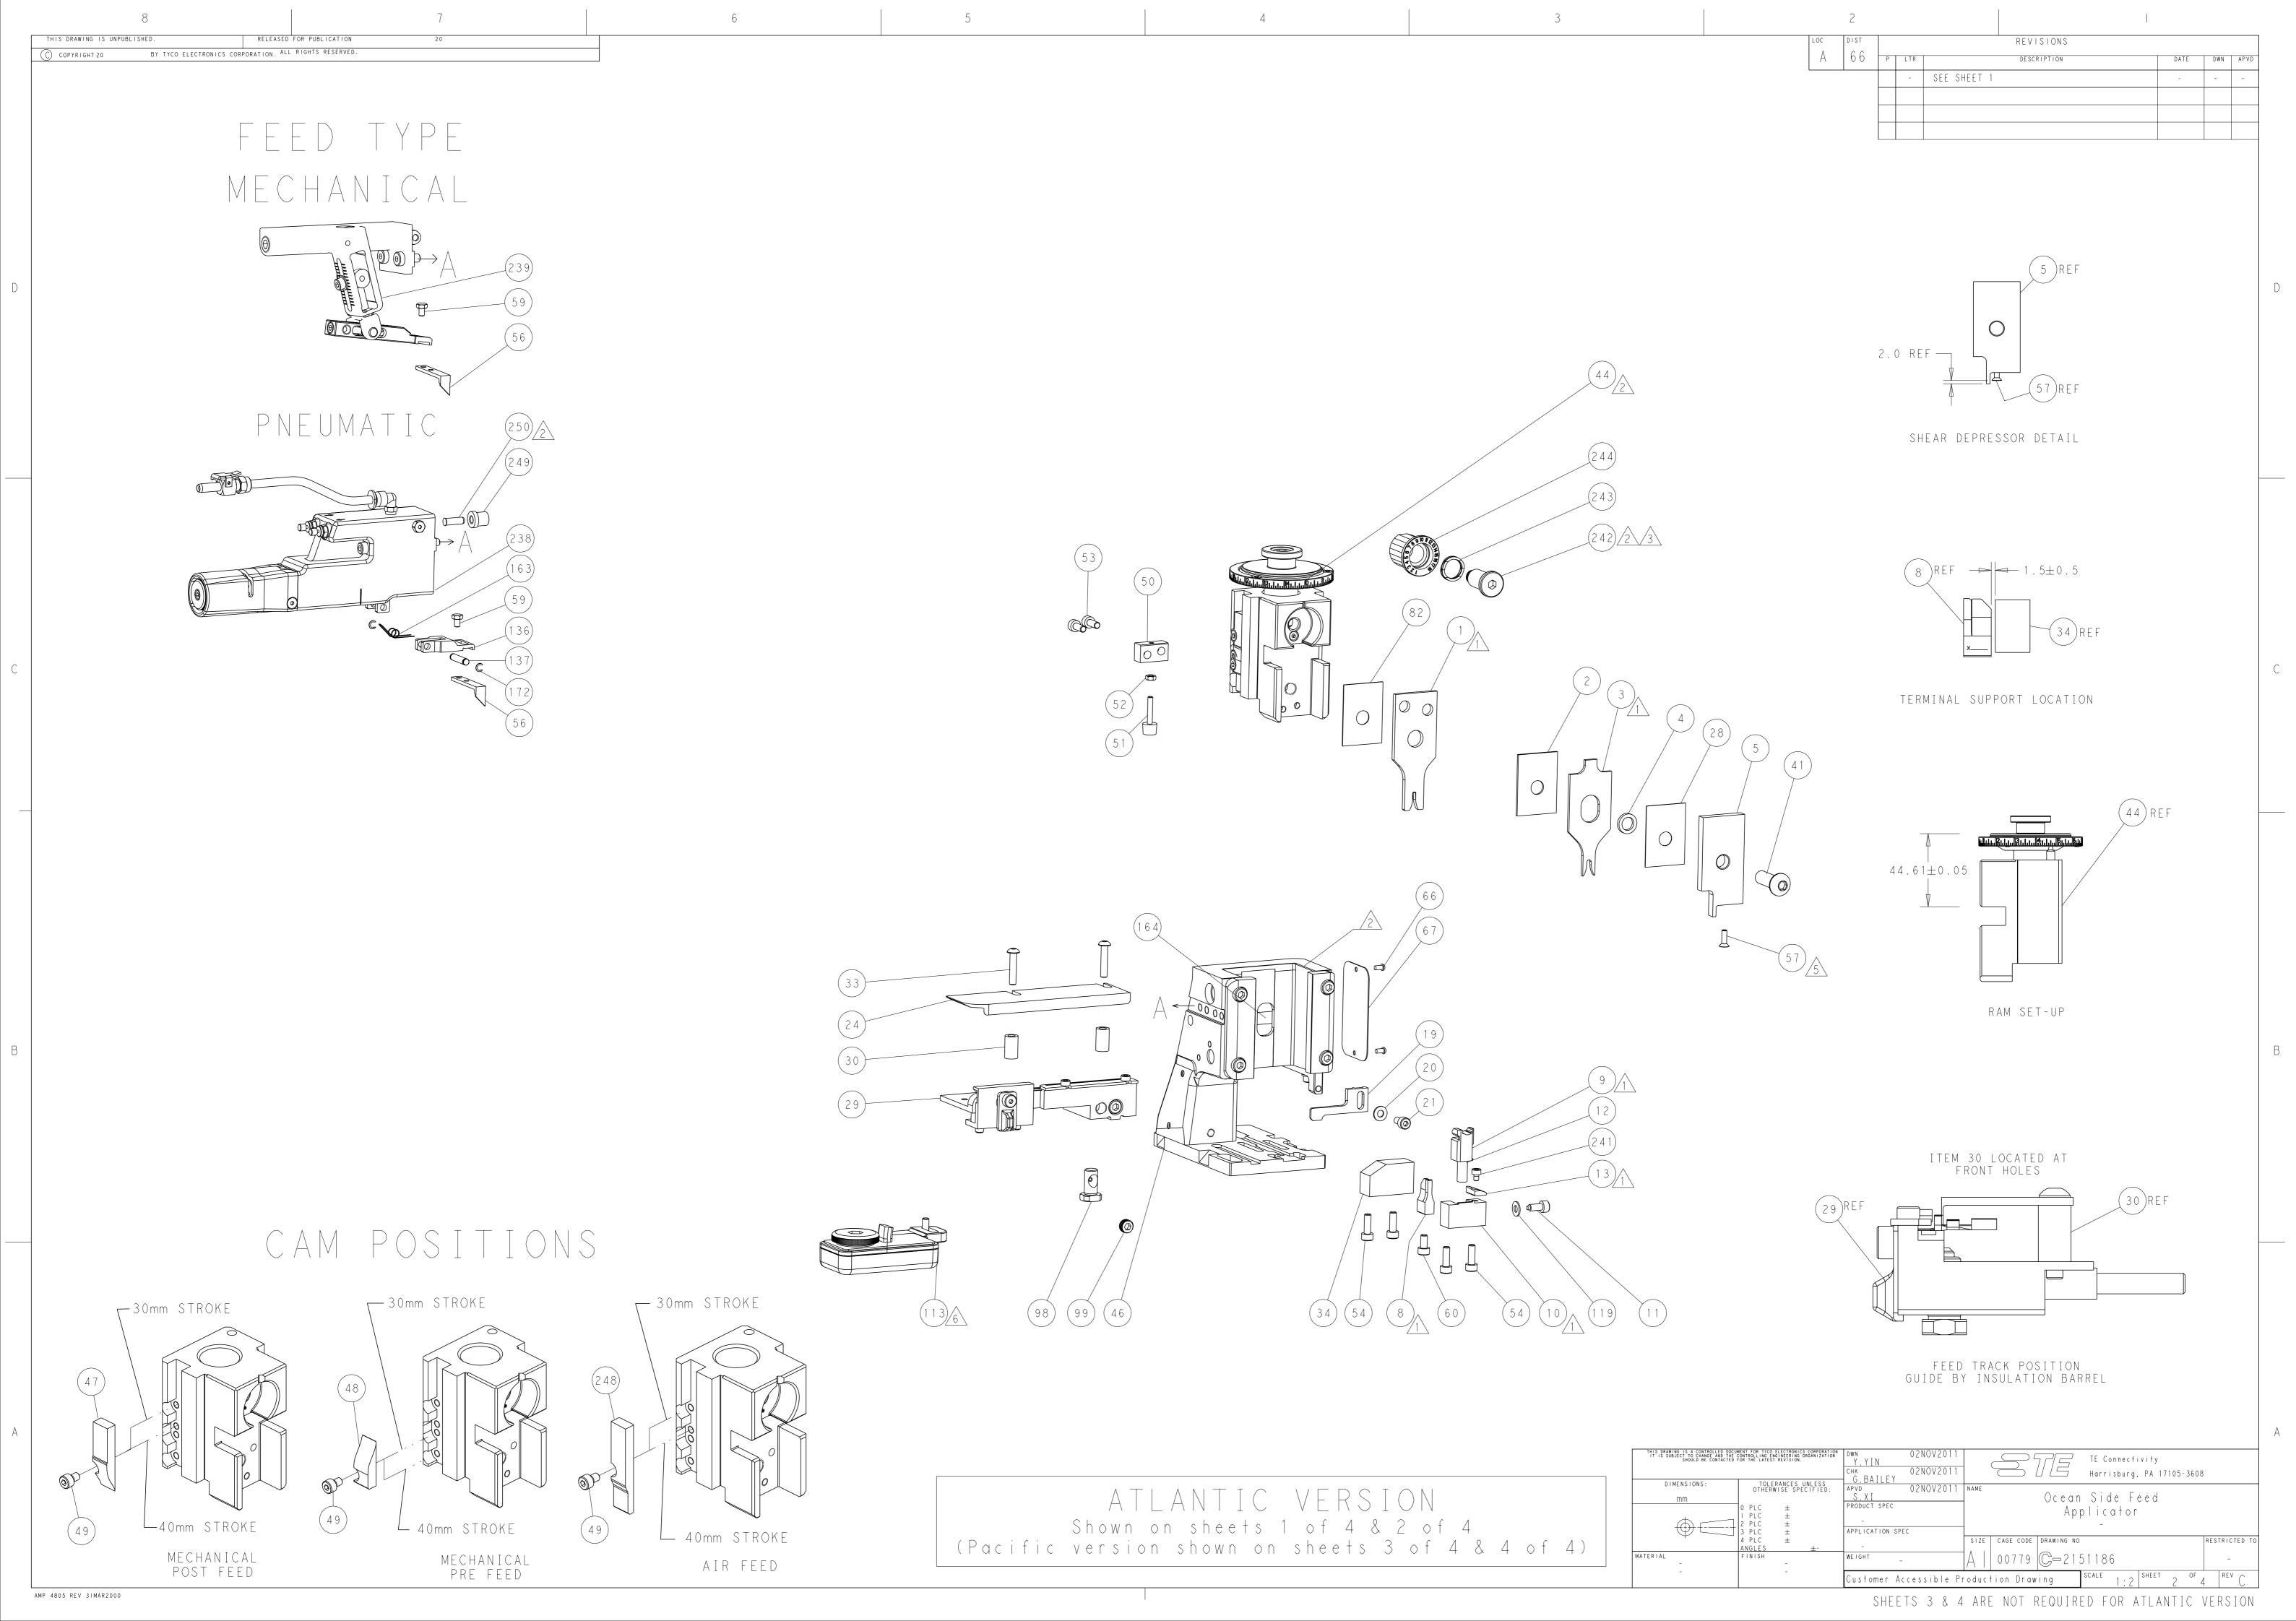

AMP 4805 REV 31MAR2000

Ocean Side Feed Applicator

19

RESTRICTED T

Shown on sheets 3 of 4 & 4 of 4 (Atlantic version shown on sheets 1 of 4 & 2 of 4)

PACIFIC VERSION

ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SE FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREA THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING, REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTM

\*WARNING

	DIMENSIONS:	TOLERAN OTHERWISE	CES UNLE SPECIF	SS IED:	APVD 02NOV2011	NAME
	THIS DRAWING IS A CONTROLLED DOCUMEN IT IS SUBJECT TO CHANGE AND THE CON SHOULD BE CONTACTED FOR				DWN 02NOV2011 Y.YIN CHK 02NOV2011 G.BAILEY	TE Connectivity Harrisburg, PA 17105-3608
MENTS.			- 22	- '	PART NO	DESCRIPTION
	1	1	1	1	409414-1	CRIMPER, WIRE
ATFR		_	1	1	1 - 455888 - 0	SPACER, CRIMPER
ETTING	$\sqrt{1}$	1	1	1	3-2119784-2	CRIMPER, INSULATION O PREMIUM
		-	1	1	2-238011-2	BLOCK, CRIMPER SPACER
		-	1	1	2119781-1	DEPRESSOR, SHEAR
		-	-	-	-	-
		_	-	-	-	-
	$\frac{1}{\sqrt{1}}$	1	1	1	1333225-6	ANVIL, COMBINATION
	71	-	1	1	318707-1	FLOATING SHEAR, FRONT
	$\sqrt{1}$	_	1	1	2119805-1	SHEAR HOLDER, FRONT
		_	1	1	1 - 356885 - 4	STOP, SHEAR

_			18023-9	SCR, SKI HD CAP M4 X 6.U
-	-	1	2119652-1	FEED CAM, PRE FEED
_	1	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)
-	1	1	1752356-3	SUPPORT, TERMINAL
-	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)
-	2	2	2-2844962-4	SPACER, CYLINDRICAL, STRIP GUIDE
-	1	1	2844992-1	ASSEMBLY, STRIP GUIDE
-	1	1	455888-3	SPACER, CRIMPER
-	1	1	1320928-2	STRIP GUIDE
-	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0

2119533-1

2119806-1

3-22280-3

APPLICATION SPEC

1338685-1 PAWL, FEED 1-2168083-0 SCR, SKT HD CAP, RoHS, M4 X 10 5018030-1 NUT, HEX, REG, RoHS, M3 811242-5 BUMPER, HOLD DOWN SPACER. TONKER 690753-2 18023-0 SCB SKT HD CAP MAY 6 0

STRIPPER, SIDE FEED

SPRING, COMPRESSION

IZE CAGE CODE DRAWING NO

ustomer Accessible Production Drawing SCALE 1:2 SHEET 3 OF 4 REV

INSERT, SHEAR

SPACER, CRIMPER 455888-4 DOCUMENTATION PACKAGE 1803607-1 TAG, IDENTIFICATION 2119740-1 2168078-1 SCREW, DRIVE, RH, RoHS, 2 x .188 1 1 5-18022-5 SCR, HEX HD CAP, M4 X 6.0 985575-3 SCR, FLT SKT HD CAP M3 X 10.0

RAM ASSEMBLY, SF PACIFIC 1803516-1 3-23627-7 PIN, RETAIN, GRVD, 3/16 X .854 HOLDER, FEED FINGER, AF 2119799-1 1 - 18028 - 2 WASHER, FLAT, REG M4 2119955-1 ASSY, LUBRICATOR, SIDE FEED 2844908-1 SCREW, LOCKING 2844907-1 POST, LOCKING

FEED CAM, AIR FEED 2119641-SCR, SKT HD CAP, RoHS, M4 X 16 2168083-8 2168083-9 SCR, SKT HD CAP, RoHS, M4 X 20 2119653-2 FEED CAM, POST FEED APPLICATOR BASIC ASSEMBLY, SF 1-1803583-(

COUNTER, MAGNETIC | REF | REF 994970-2 SPRING, FEED FINGER 240638-1

MECHANICAL FEED ASSEMBLY 2119580-1 AIR FEED MODULE 2063440-21045-3 RING, RETAIN, EXTERN, 3/16 CRESCENT

1803259-1 BUSHING, FLANGED CAM, SNAIL, INSULATION ADJUSTMENT 2119082-3 WASHER, WAVE SPRING, CREST-TO-CREST 2079764-1 2119083-1 RETAINER, INSULATION DIAL SCR, SKT HD CAP M3 X 4.0 7 - 18023 - 7

PUSH ROD, AIR FEED 2119640-1

SEE SHEET 1

REVISIONS A 66

PACIFIC VERSION TERMINATOR INTERFACE ADAPTER

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. C) COPYRIGHT 20 PART FEED TYPE REVISION DESCRIPTION NUMBER

TE CRIMP SPECIFICATION

CRIMP HEIGHT

REFERENCE SETTING

4.1

5.1

YAZAKI SEAL

7B58-3070-80

Ø 1.4-1.7mm [.055-.067 [N]

TE SEAL

286912-1

2 REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND

APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY #1-23419-5 LOC-TITE TO THREADS.

7. UNLESS SPECIFIED OTHERWISE TORQUE VALUES SHALL BE USED PER

FINE CRIMP HEIGHT ADJUST

FINE CRIMP HEIGHT ADJUST

CRIMP TOOLING KIT

2-2151186-1

2-2151186-2

7 - 2151186 - 7

CRIMP

APPLICATOR DATA

APPLICATOR INSTRUCTIONS

TERMINAL DATA: TE TERMINAL

4.00-4.50 mm [.157-.177 IN]

TERMINALS APPLIED 6

TERMINAL APPLICATION

SPECIFICATION

TE TERMINAL

316832-1

0.50mm2

0.30mm2

WIRE | 1.78 mm [.070]

INSUL 3.00 mm [.118]

408-35042

SIZE

TYPE

WIRE STRIP LENGTH TERMINAL INSULATION DIAMETER RANGE

TERMINAL NAME: .040 III SEALED CONTACT

114-5227

TE TERMINAL

316833-2

1.03+/-0.05 [.041+/-.002]

0.94+/-0.05 [.037+/-.002]

1 RECOMMENDED SPARE PARTS

STORAGE OF APPLICATOR.

DOCUMENT, 101-35000.

TERMINAL LUBRICANT IS RECOMMENDED.


MECHANICAL

PNEUMATIC

SEAL INSULATION

DIAMETER RANGE

 $\emptyset$  1.4-1.7mm

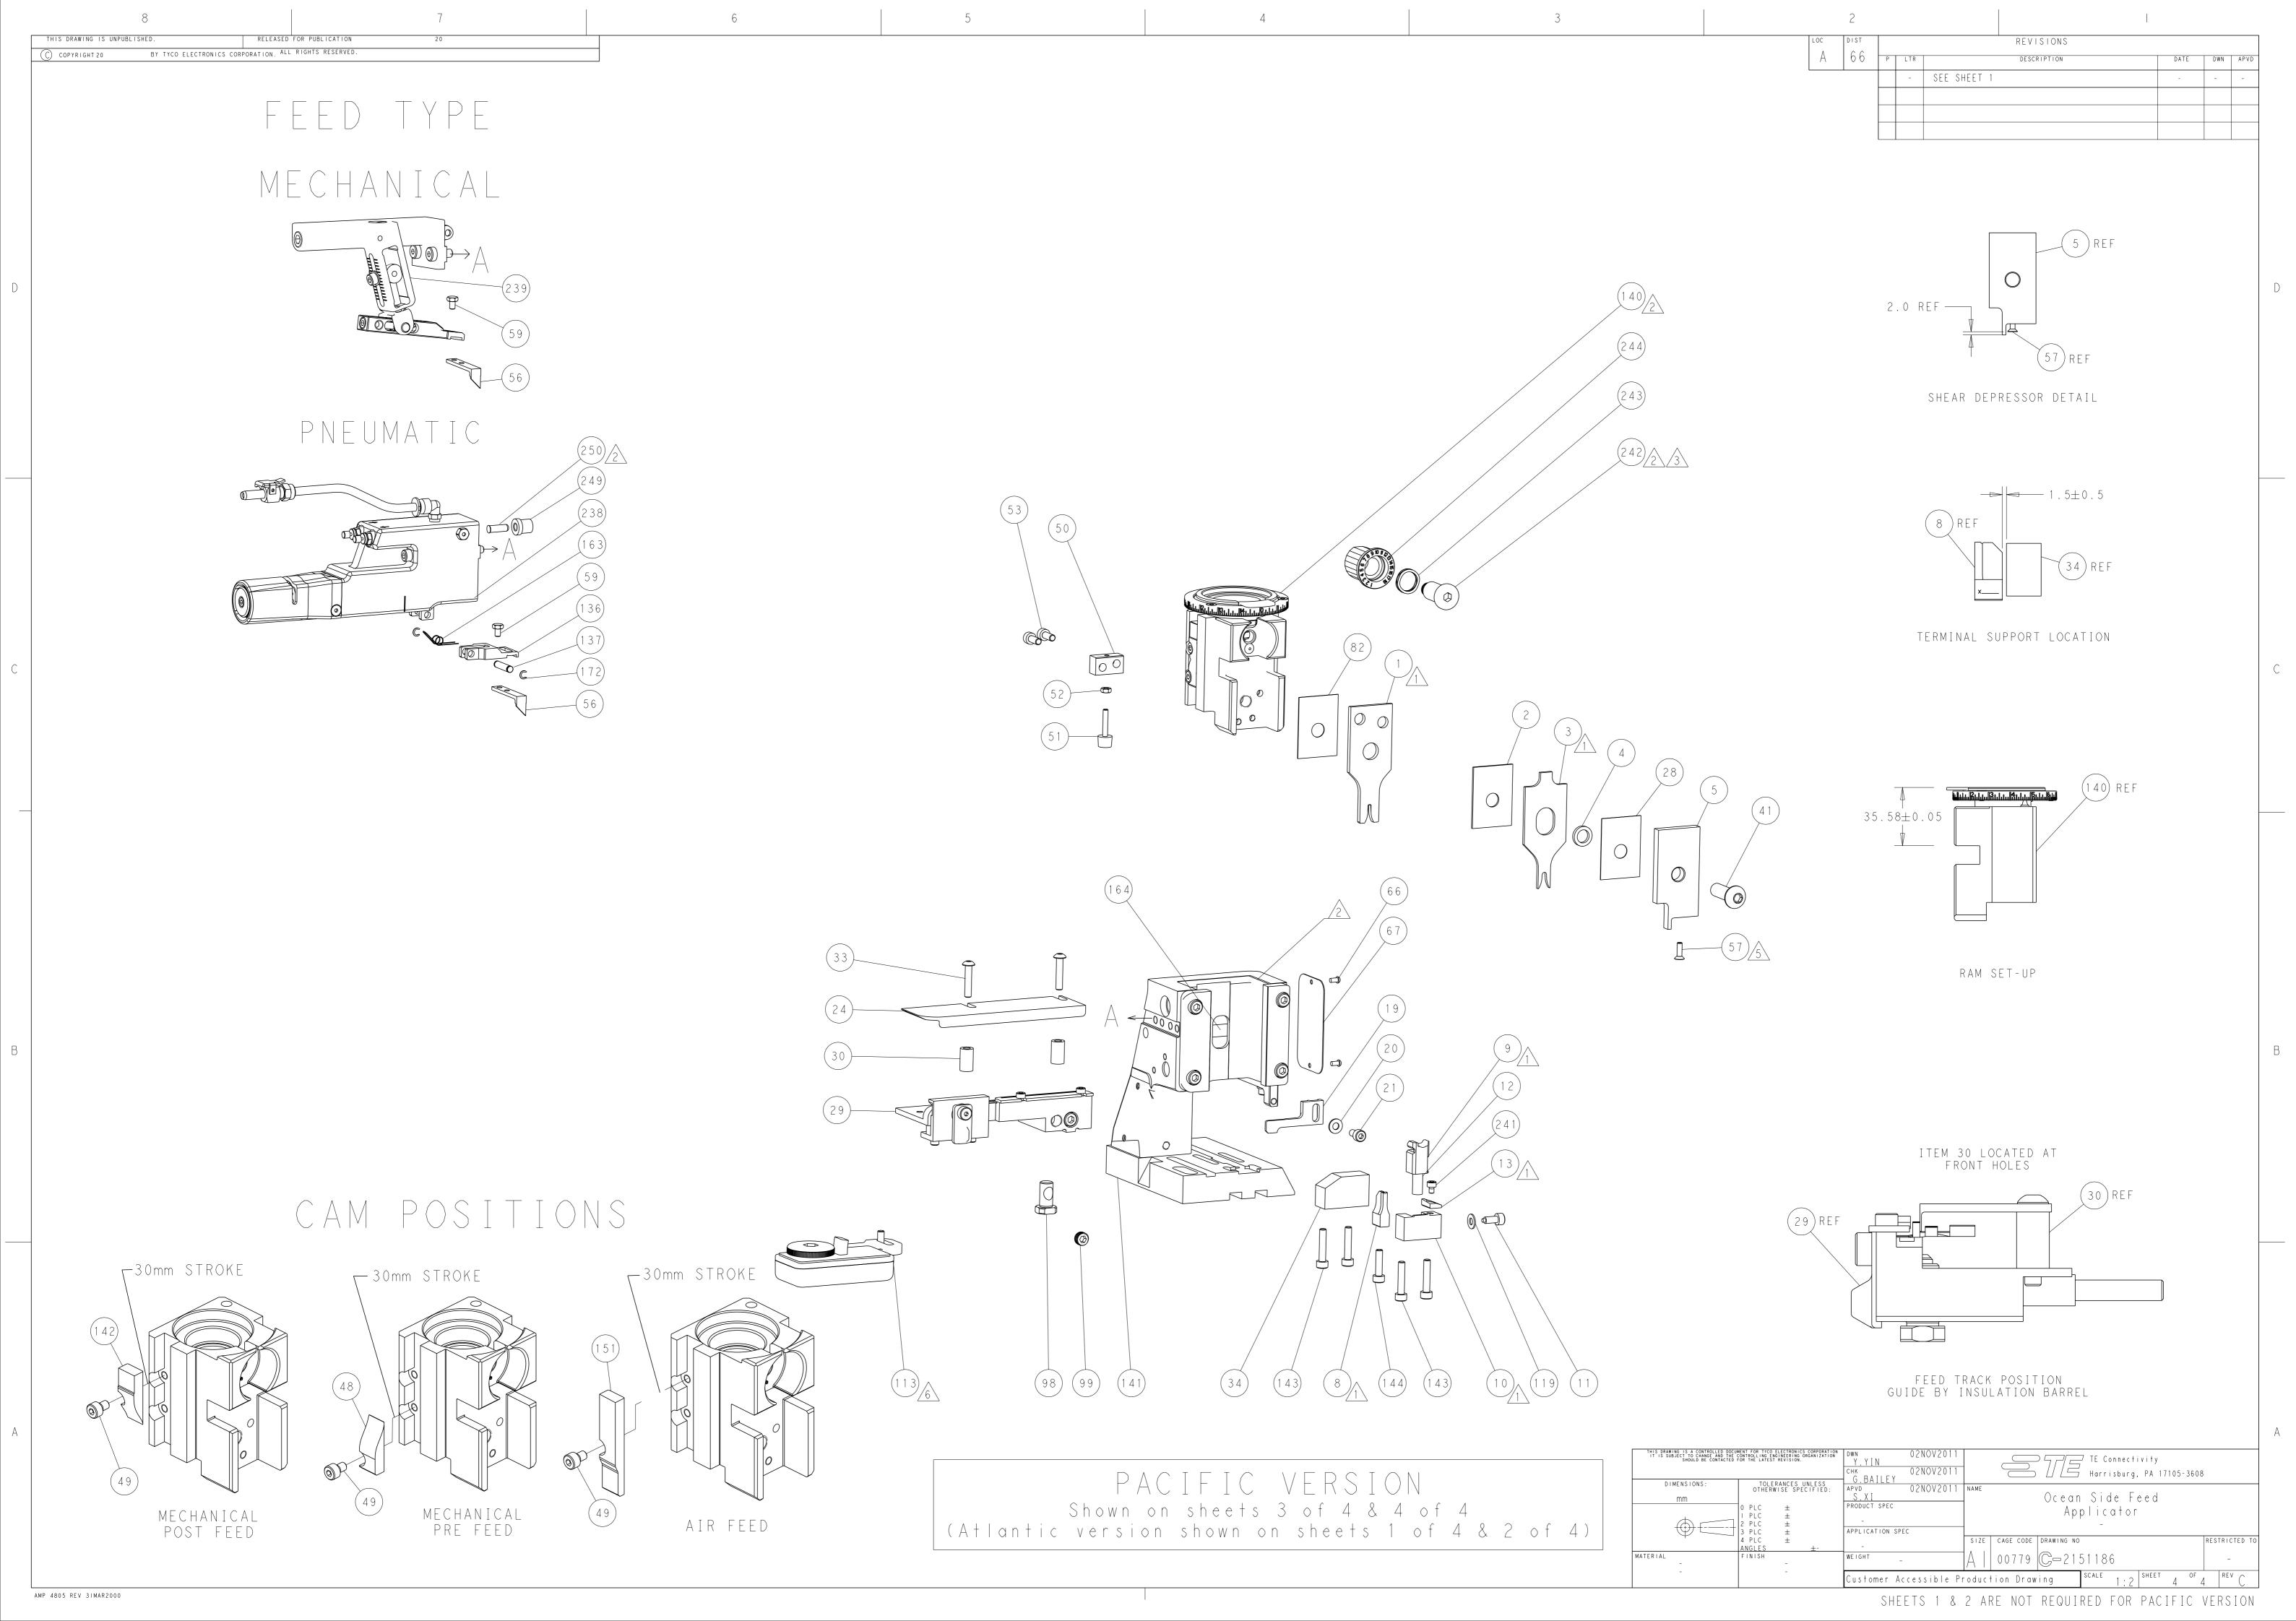

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 7-2151186-7