

# S24497P Series

## 2.4-2.5 / 4.9-5.9 GHz 7dBi Dual-Band Tri-Mode Directional Panel Antenna



### DUAL BAND 802.11 A/B/G/N DIRECTIONAL ANTENNA

Laird dual-band tri-mode directional antenna allows the customer to install one antenna system and continue to use that one antenna system regardless of the 802.11 mode of operation or frequency band. Your customer can install and use the antenna system for 802.11b or g service today and can continue to use the antenna to support an 802.11a system if they deploy one at some later date. Customers deploying an 802.11b or g system might intend keeping those systems functioning while also deploying an 802.11a system, can deploy some number of them for b/g and at some later date deploy them for 802.11a. They can mix and match as they deploy while maintaining the same aesthetic approach for all of their antennas.

Pattern shapes are uniform and symmetrical providing high levels of signal density into defined coverage zones, an important feature for high data rate, high capacity environments such as offices.

Standard cable length is 36 inches and the standard connector is the reverse polarity TNC. However other coax length and connector alternatives are available as well.


### FEATURES

- 802.11 a/b/g/n and wide band frequency coverage
- Variety of cable lengths and connectors available
- Fast and easy installation with articulating mount included
- Neutral color and diminutive profile disappears into the environment

### MARKET

- Hospital
- Campus
- Research institute
- Public safety wireless systems
- Transport terminals
- WiMAX

PARAMETER	SPECIFICATION
Frequency Range	2.4 - 2.5 & 4.90-5.99 GHz
Gain	7 dBi
Maximum VSWR	2:1
2 dB Beamwidth - Elevation	66°@ 2.5 / 60 °@ 5.5 GHz
3 dB Beamwidth - Azimuth	68°@ 2.5 / 52 °@ 5.5 GHz
Polarization	Vertical Linear
RF Connector	Reverse TNC
Power Rating	10 W
Dimensions	4.1 x 4.1 x 1.5 in (104 x 104 x 38 mm)
Weight	.23 kg
Operational Temperature	0°C to +55°C
Mount Style	Wall
RoHS	Compliant

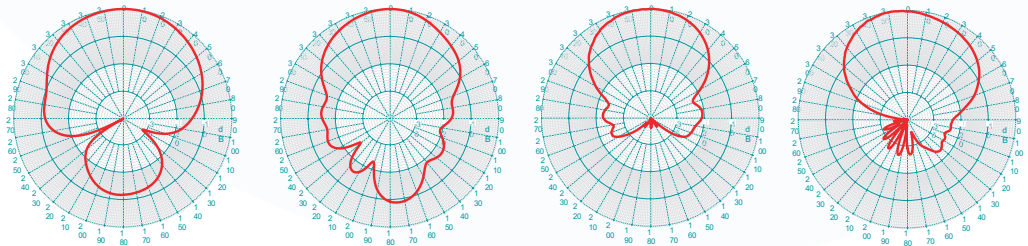

Americas: +1.847.839.6925  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

ANT-DS-S24497PS 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TE Connectivity:

[S24497P12NF](#) [S24497P12NM](#) [S24497P12RSM](#) [S24497P36NF](#) [S24497P36NM](#) [S24497P36RSM](#) [S24497P36RTN](#)  
[S24497P36TNM](#) [S24497P79NM](#) [S24497P79RSM](#)