

REVISIONS DESCRIPTION SEE SHEET 1

## CONNECTOR CONTACT IDENTIFICATION A

CONTACT NUMBER	SIDE A	SIDE B	
1	GROUND	GROUND	
2	SIGNAL	SIGNAL	
3	SIGNAL	SIGNAL	
4	GROUND	GROUND	
5	SIGNAL	SIGNAL	
6	SIGNAL	SIGNAL	
7	GROUND	GROUND	
8	SIGNAL	SIGNAL	
9	SIGNAL	SIGNAL	
10	GROUND	GROUND	
11	SIGNAL	SIGNAL	
12	SIGNAL	SIGNAL	
13	GROUND	GROUND	
14	SIGNAL	SIGNAL	
15	SIGNAL	SIGNAL	
16	GROUND	GROUND	
17	SIGNAL	SIGNAL	
18	SIGNAL	SIGNAL	
19	GROUND	GROUND	
20	SIGNAL	SIGNAL	
21	SIGNAL	SIGNAL	
22	GROUND	GROUND	
23	SIGNAL	SIGNAL	
24	SIGNAL	SIGNAL	
25	GROUND	GROUND	
26	SIGNAL	SIGNAL	
27	SIGNAL	SIGNAL	
28	GROUND	GROUND	
29	GROUND	GROUND	
30	SIGNAL	SIGNAL	
31	SIGNAL	SIGNAL	
32	GROUND	GROUND	
33	SIGNAL	SIGNAL	
34	SIGNAL	SIGNAL	
35	GROUND	GROUND	

CONTACT NUMBER	SIDE A	SIDE B
36	SIGNAL	SIGNAL
37	SIGNAL	SIGNAL
38	GROUND	GROUND
39	SIGNAL	SIGNAL
40	SIGNAL	SIGNAL
41	GROUND	GROUND
42	GROUND	GROUND
43	GROUND	GROUND
44	SIGNAL	SIGNAL
45	SIGNAL	SIGNAL
46	GROUND	GROUND
47	SIGNAL	SIGNAL
48	SIGNAL	SIGNAL
49	GROUND	GROUND
50	SIGNAL	SIGNAL
51	SIGNAL	SIGNAL
52	GROUND	GROUND
53	SIGNAL	SIGNAL
54	SIGNAL	SIGNAL
55	GROUND	GROUND
56	SIGNAL	SIGNAL
57	SIGNAL	SIGNAL
58	GROUND	GROUND
59	SIGNAL	SIGNAL
60	SIGNAL	SIGNAL
61	GROUND	GROUND
62	SIGNAL	SIGNAL
63	SIGNAL	SIGNAL
64	GROUND	GROUND
65	SIGNAL	SIGNAL
66	SIGNAL	SIGNAL
67	GROUND	GROUND
68	SIGNAL	SIGNAL
69	SIGNAL	SIGNAL
70	GROUND	GROUND

$\sqrt{3}$	OCP	CONT	ROLLED	AF	REA
	CON	NTACT	<u>.</u>		

CONTACT NUMBER	SIDE A	SIDE B
0 1	GROUND GROUN	
0 2	SIGNAL SIGNAL	
0 3	SIGNAL SIGNA	
0 4	GROUND	GROUND
0 5	SIGNAL	SIGNAL
0 6	SIGNAL	SIGNAL
0 7	GROUND	GROUND
0 8	SIGNAL SIGNA	
0 9	SIGNAL	SIGNAL
0 10	GROUND	GROUND
0 11	SIGNAL	SIGNAL
0 12	SIGNAL	SIGNAL
0 13	GROUND	GROUND
0 14	GROUND	GROUND

NOTE A HOUSING AND COVER: LCP, UL94-VO, BLACK.

CONTACTS: COPPER ALLOY. GOLD PLATE ON CONTACT AREA.

TIN PLATE ON SOLDER TAIL AREA.

OA1~OA14 AND OB1~OB14 ARE CONTROLLED
SECTION FOR OCP.

APPLICABLE HOST BOARD THICKNESS

SOFFSET AMOUNT BETWEEN AIC BOARD AND

HOST BOARD CENTER LINE.

SEE MSA SPECIFICATION FOR ADDITIONAL PADDLE CARD LAYOUTS COMPATIBLE WITH THIS RECEPTACLE AND FOR OPTIONAL SPLIT CONTACT PAD LAYOUTS FOR THE PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.

POSITIONS DESIGNATED AS "SIGNAL" ARE RECOMMENDED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING. THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND

SIGNALS OR OTHER UTILITY PUPOSES. & CONTROLLED ACROSS PADS.

THIS LAYOUT IS ADOPTED IN SFF-TA-1002

SCREW IS ENCLOSED BY SEPARATE PACKING. SCREW SIZE: M2

SCREW LENGTH(REF): 6

HEAD SIZE(REF): Ø3.5, 1.3HEIGHT DATE CODE MARKING.

A CONNECTOR MUST BE FIXED ON PCB BY SCREW AFTER SOLDERING.

ALL CHAMFERED EDGES AND EDGE OF PADS SHALL BE FREE OF BURRS.

A HOUSING ID MARK


THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity Ltd. DIMENSIONS TOLERANCES UNLESS OTHERWISE SPECIFIED: 168 POSITION SLIVER 2.0 STRADDLE MOUNT 1 PLC ± = 2 PLC ± = 3 PLC ± = PPLICATION SPE SIZE CAGE CODE DRAWING NO RESTRICTED : MATERIAL A2 00779 **C-**2340321 CUSTOMER DRAWING SCALE NTS SHEET 4 OF 6 REV G1


1471-9 (1/15)

D

C

В

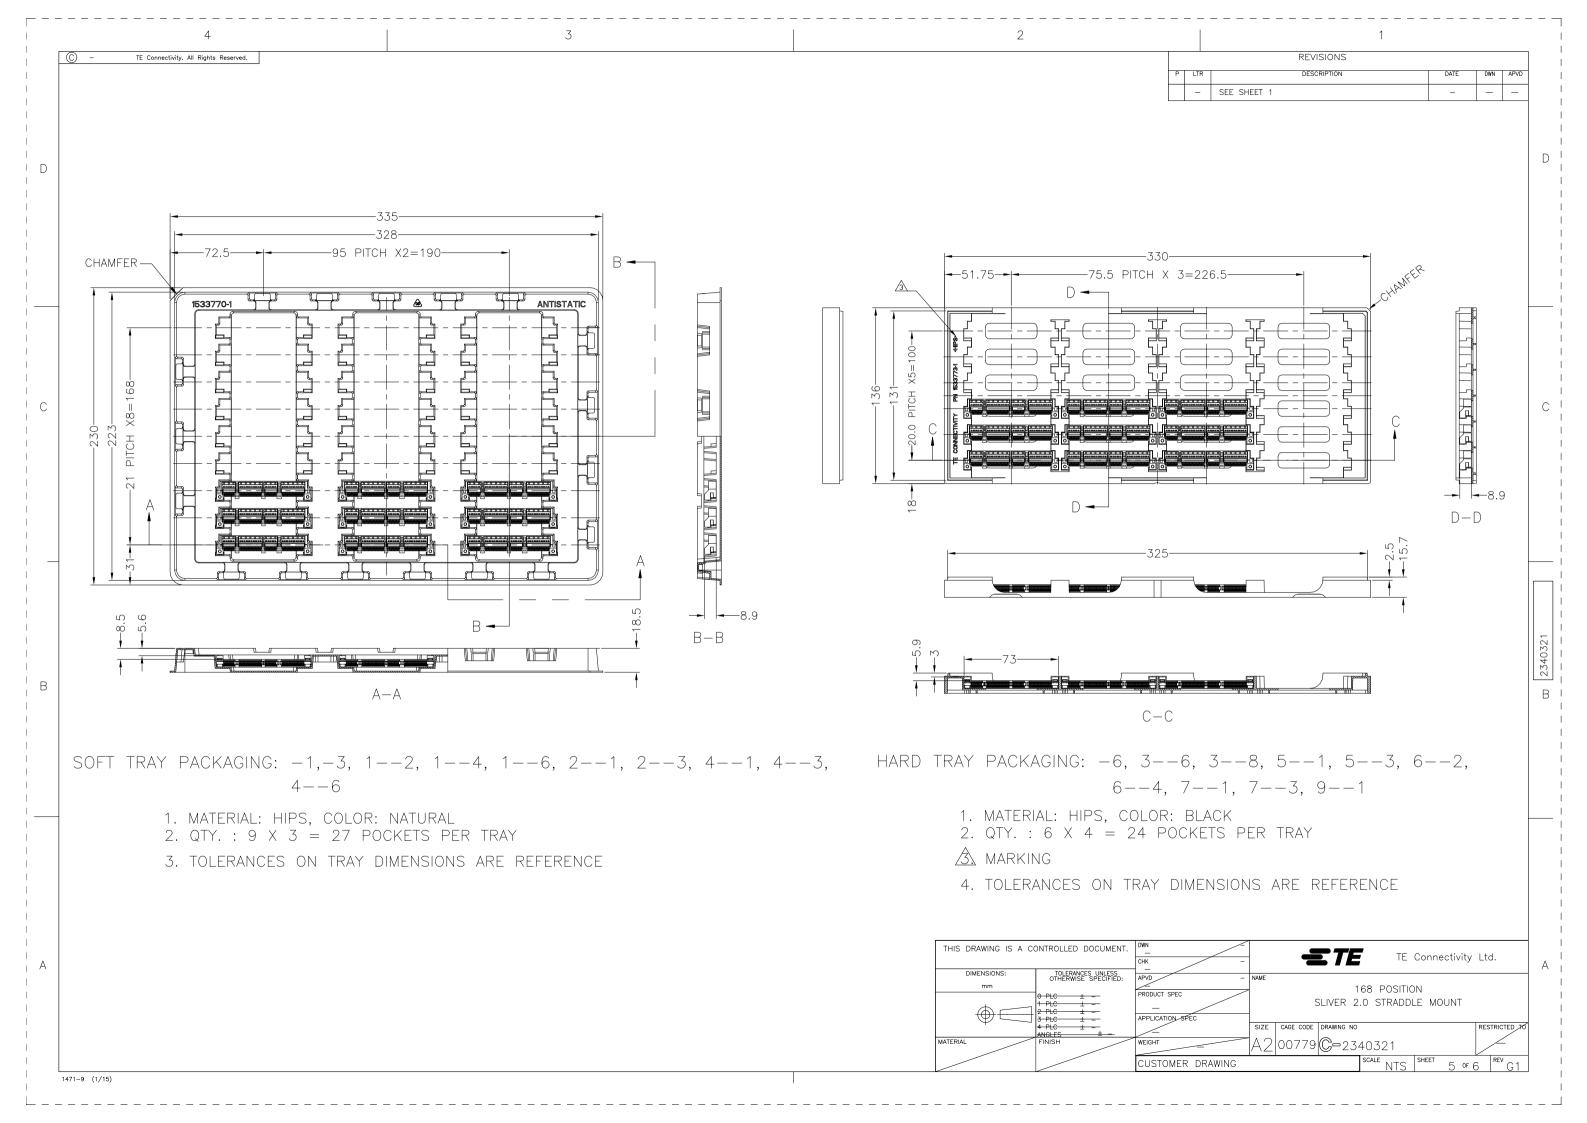

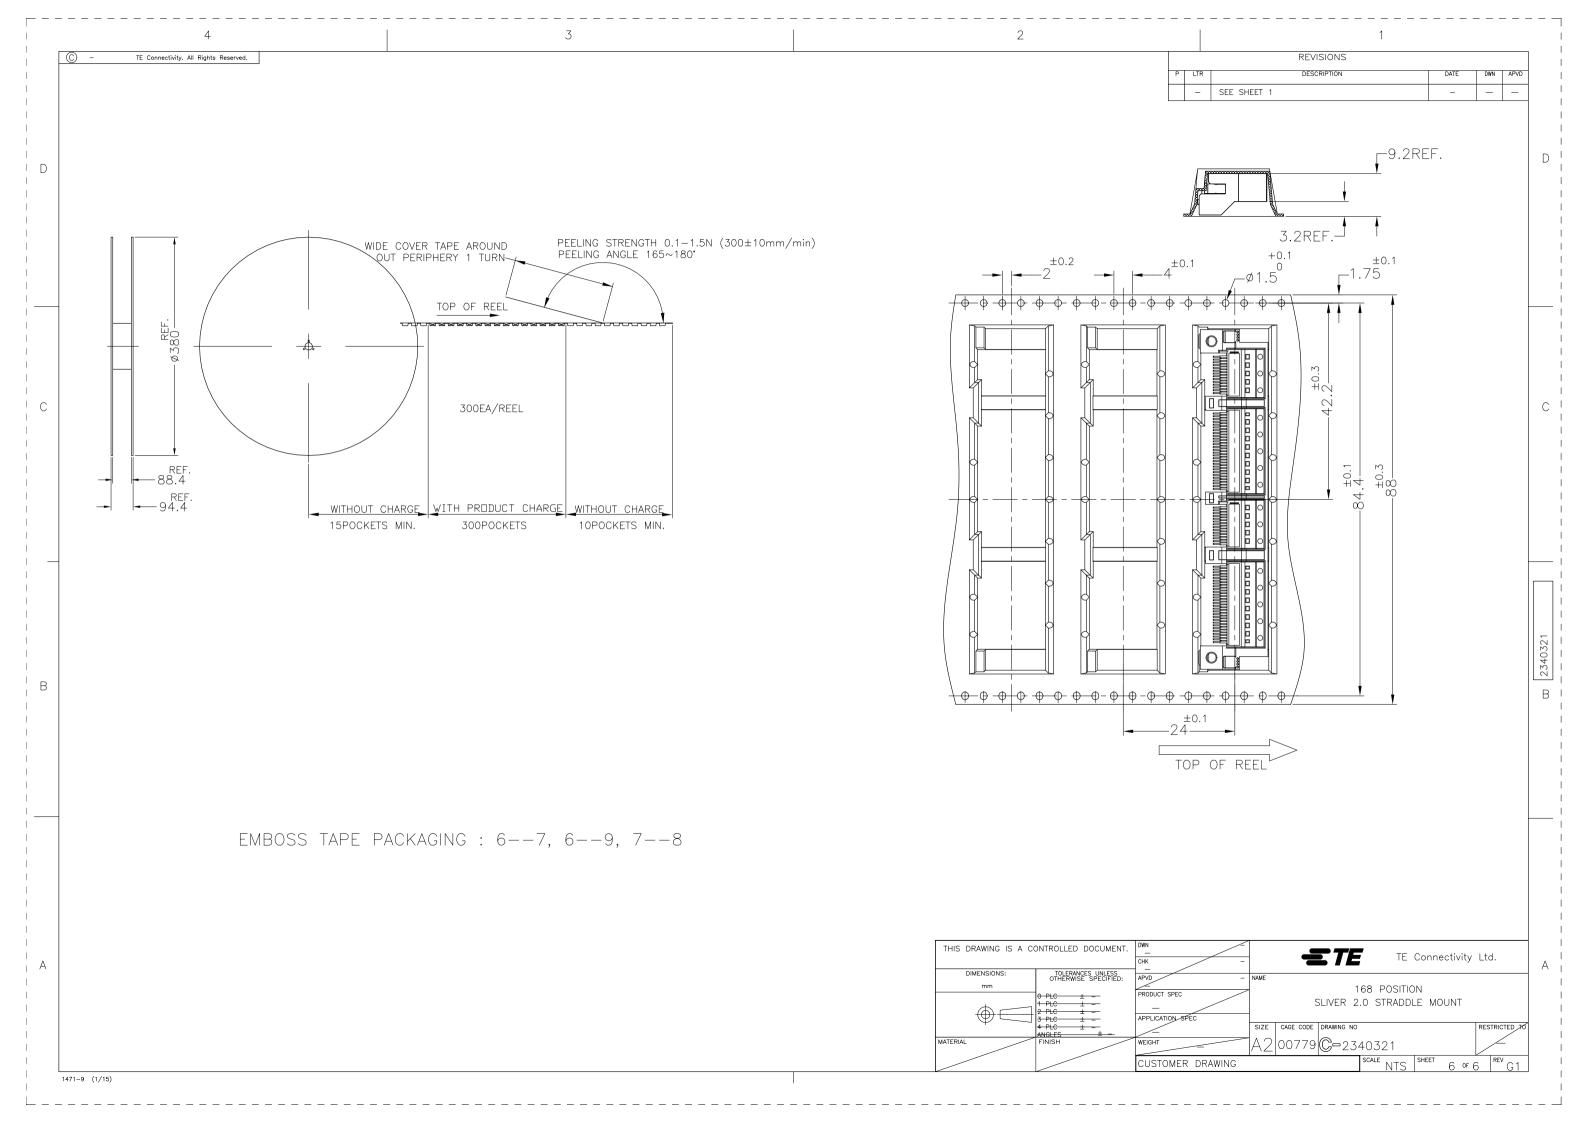

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 7-2340321-1