

RECOMMENDED PCB LAYOUT FOR USE WITH .008 THICK STENCIL

8 TE Connectivity. All Rights Reserved.

С

В


А

4805 (1/15)



1THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING. 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254[.000100]—0.00508[.000200] MATTE TIN—LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. 23 HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY. 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254[.000100]—0.00508[.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. 4

5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

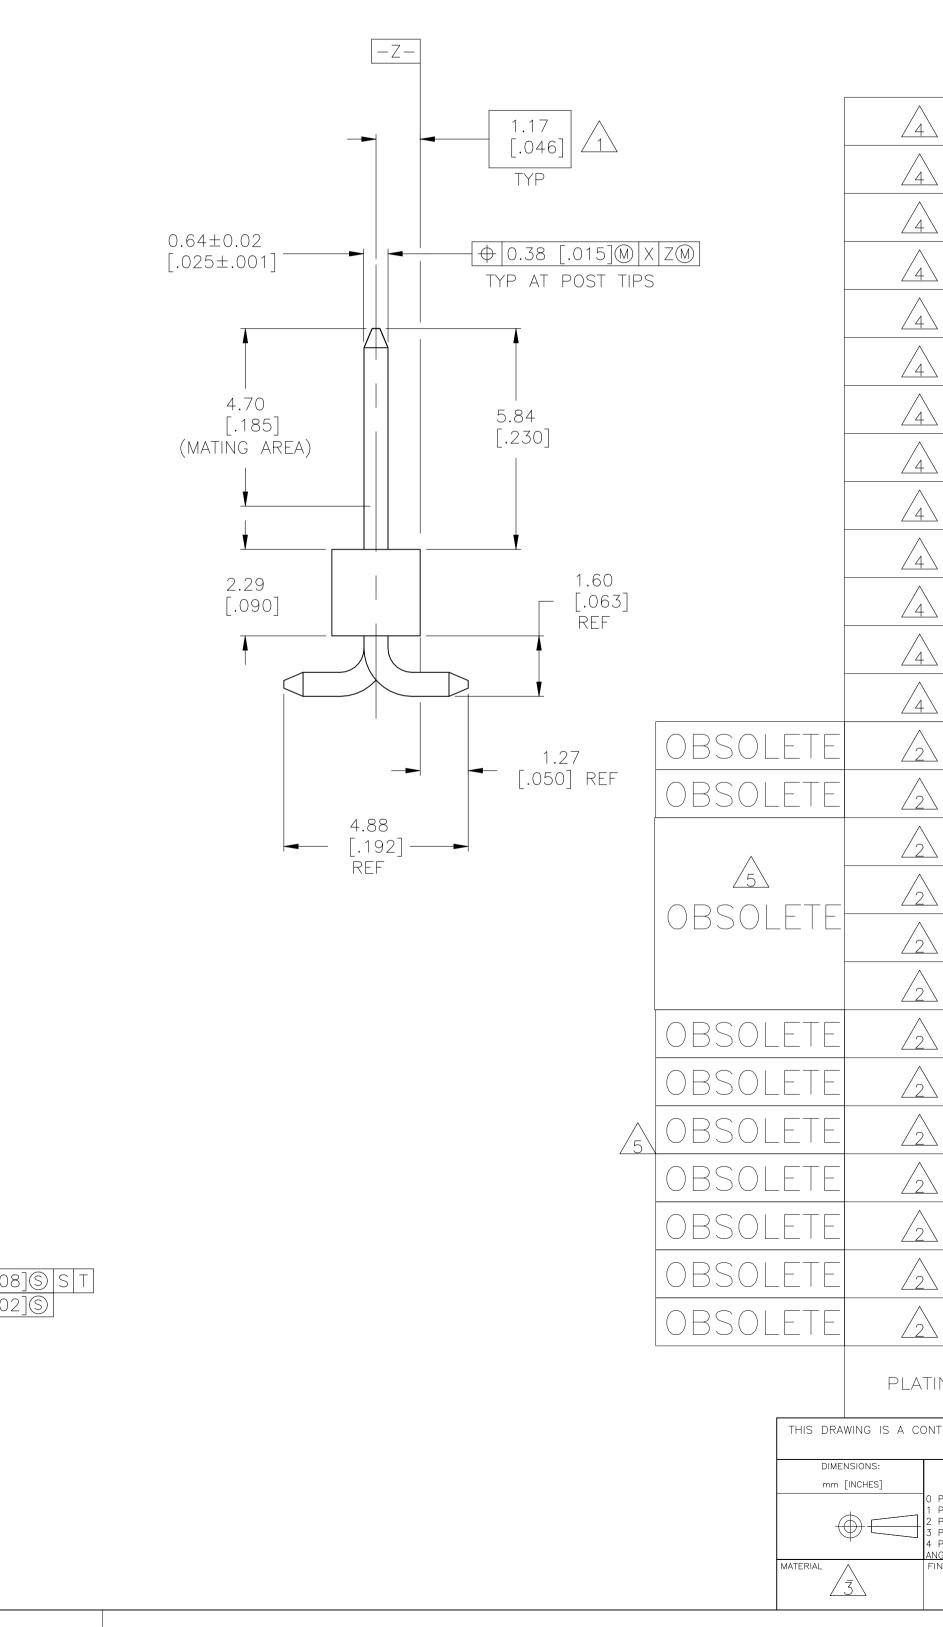

0.15 [.006] X ALL SURFACES

3.56±0.08 [.140±.003]

4	35.56 [1.400]		14	35.69 [1.484]	15	6-146128-3		
4	33.	33.02 [1.300]		 	14	6-146128-2		
4			12	 	13	6-146128-1		
4	27.94 [1.100]		1 1	 28.07 [1.184]	12	6-146128-0		
4	25.40 [1.000]		10	27.53 ₁₁ 1.084] 11		5-146128-9		
4	22.86		9	 	10	5-146128-8		
4	20.32		8	22.45 [.884]	9	5-146128-7		
4	17.		7	19.91 [.784]	8	5-146128-6		
4	15.	_	6			5-146128-5		
4	12.		5	14.83 [.584]	6	5-146128-4		
4	10.		4	12.29 [.484]	5	5-146128-3		
4	7.6		3	9.75 [.384]	4	5-146128-2		
4	5.0		2	7.21 [.284]	3	5-146128-1		
2	35. [1.4	56 .00]	14	35.69 [1.484]	15	1_146128_3		
2	_	02	13	33.15 [1.384]	14	1_146128_2		
2	30. [1.2	48 :00]	12	30.61 [1.284]	13	-1-146128-1-		
2	_	94 00]	1 1	28.07 [1.184]	12	-1-146128-0-		
2	25. [1.C	40	10	27.53 [1.084]	1 1	146128-9		
2	22.	_	9	24.99 [.984]	10			
2	20.	_	8	22.45 [.884]	I 9 146			
2	17. [.7(7	19.91 [.784]	8	146128_6		
2	15. [.60		6	17.37 [.684]	7	146128_5		
$\sqrt{2}$	12.7		5	14.83 [.584]	6	146128_4		
$\sqrt{2}$	10.	4		12.29 [.484]	5	1461283		
$\sqrt{2}$	7.6		3	9.75 [.384]	4	146128_2		
$\sqrt{2}$	5.0	80 00	2	7.21 [.284]	3	146128_1		
LATING		C B		A	NO OF Posn	PART NUMBER		
CONTROLLED D	OCUMENT.	wn J KNAU hk	30–09–9 B 30–09–9		E TE	TE Connectivity		
	S UNLESS SPECIFIED: A	G DUBN PVD G DUBN RODUCT SPE	<u>11CZKI</u> 30-09-9 11CZKI	NAME SURFACE MOUNT HEADER ASSY,				
$ \begin{array}{c} 0 \ PLC \qquad \pm \\ 1 \ PLC \qquad \pm \\ 2 \ PLC \qquad \pm \\ 3 \ PLC \qquad \pm \\ \end{array} $	-	PPLICATION			MOD II, B/A, VERT, SR, .100 X.100 C/L .025 SQ.POST			
4 PLC ± ANGLES		WEIGHT			de drawing no 79 C= 1461	RESTRICTED TO		
FINISH			_					

А

2			1					
	REVISIONS							
	Ρ	LTR	DESCRIPTION	DATE	DWN	APVD		
		L1	REVISED PER ECN-22-164704	15JUL2022	RK	MF		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1-146128-3