
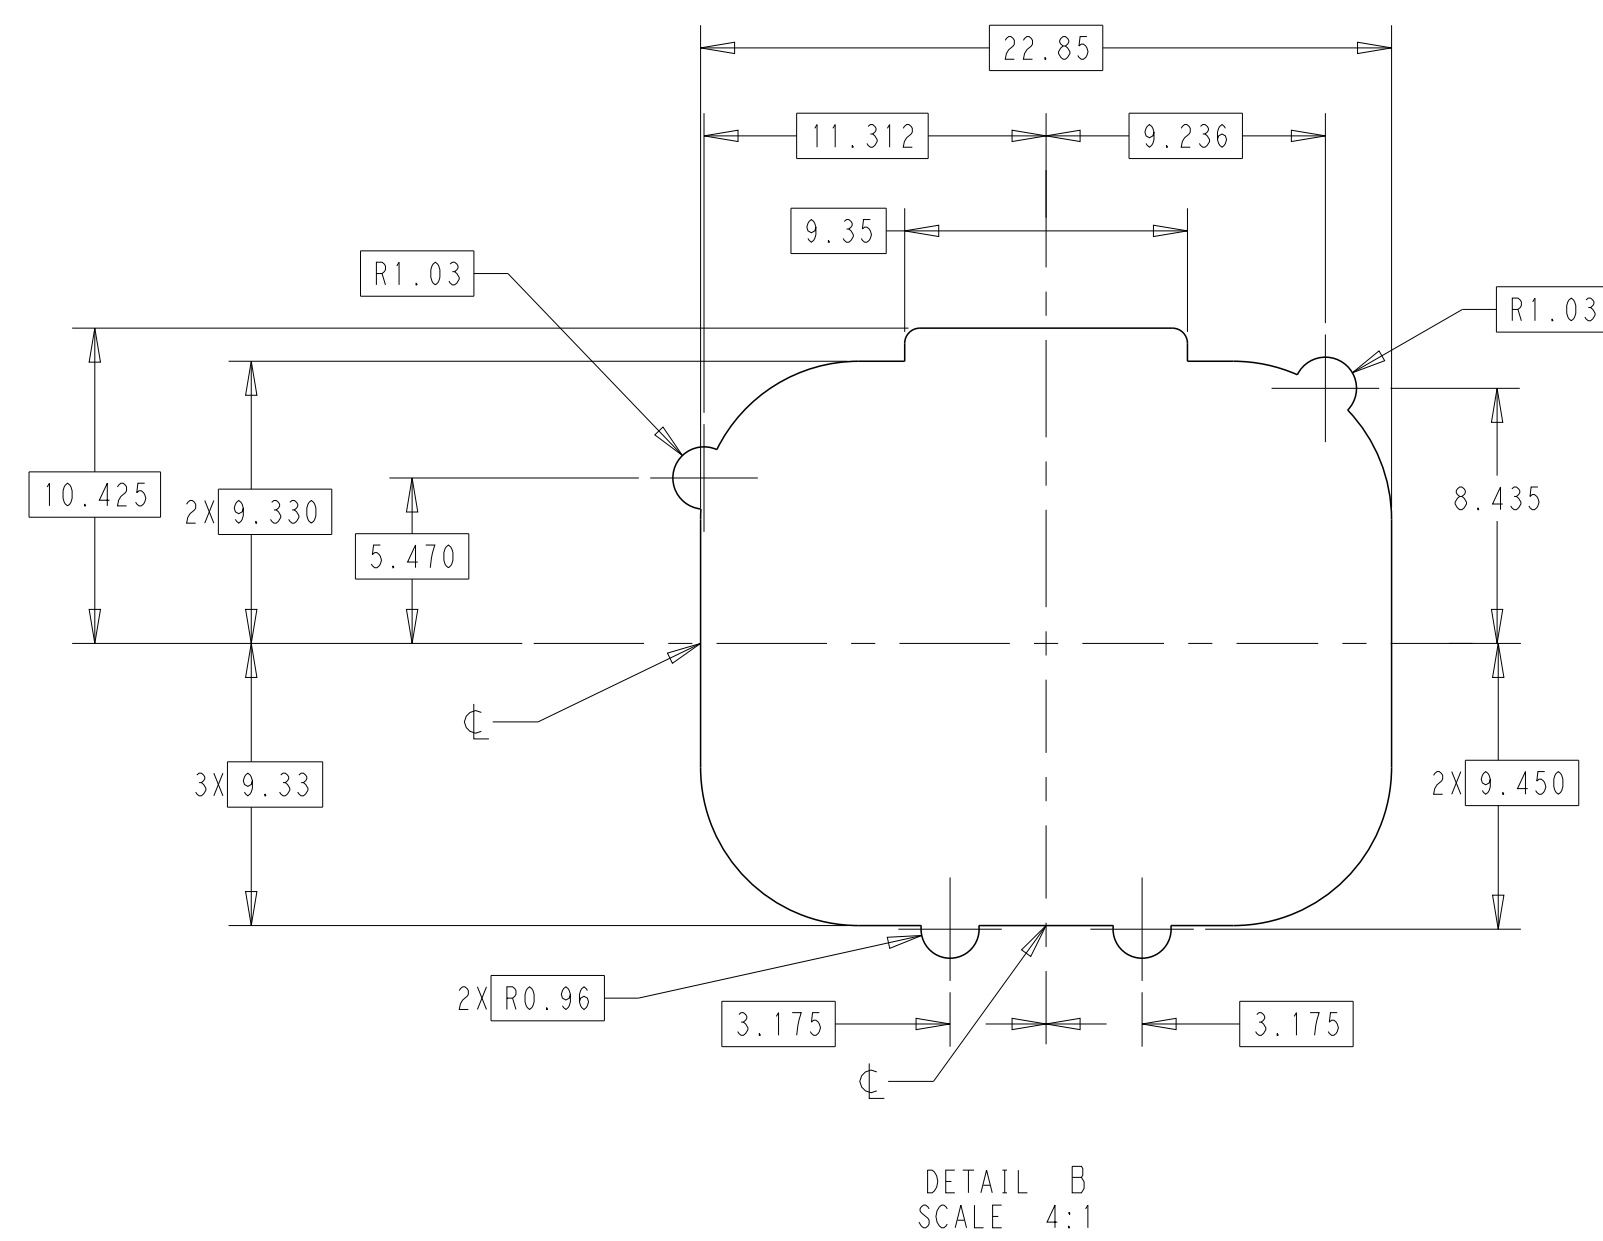
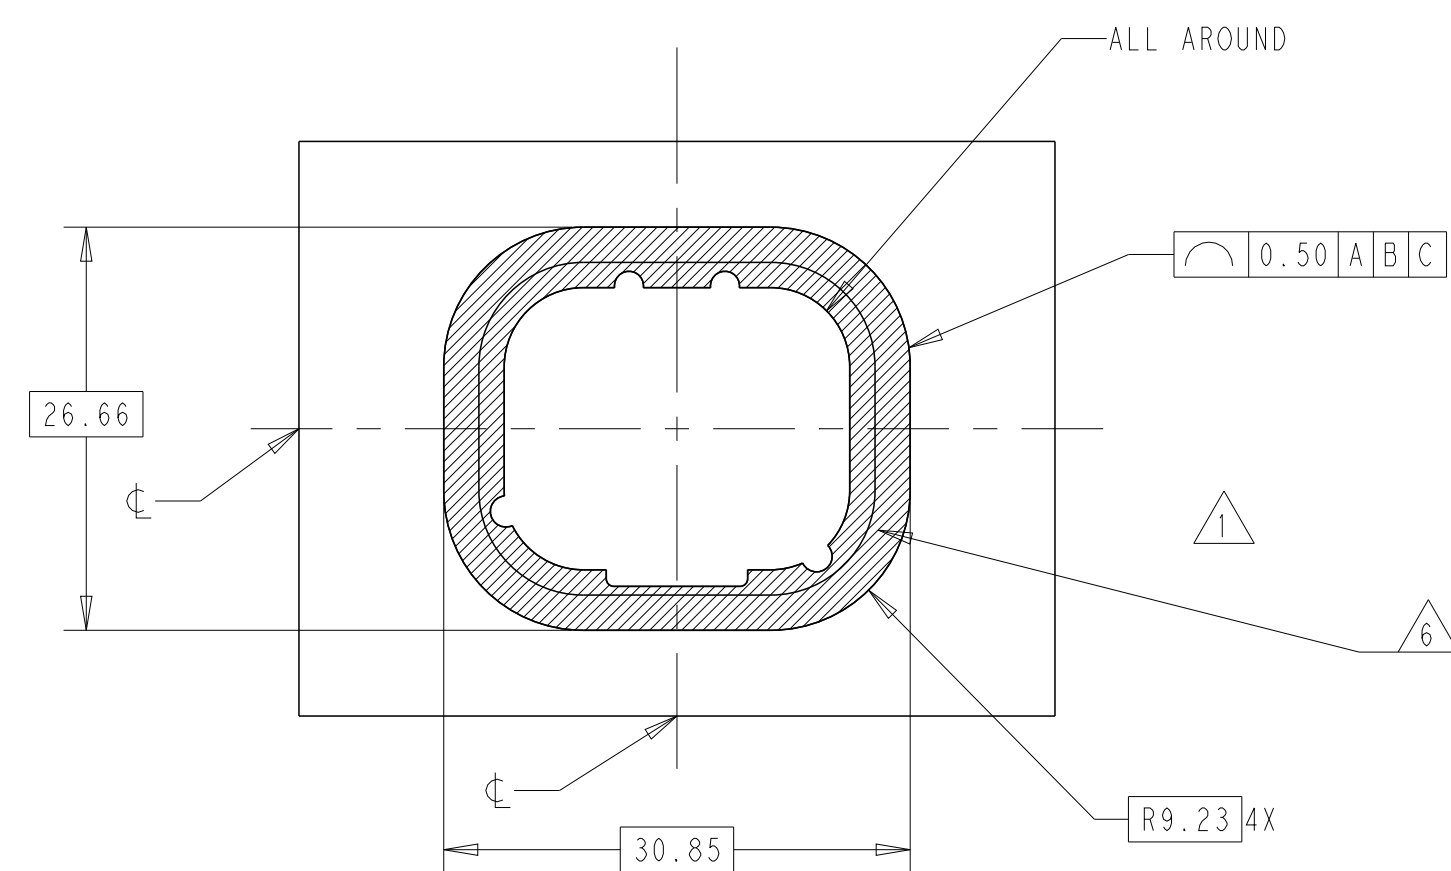
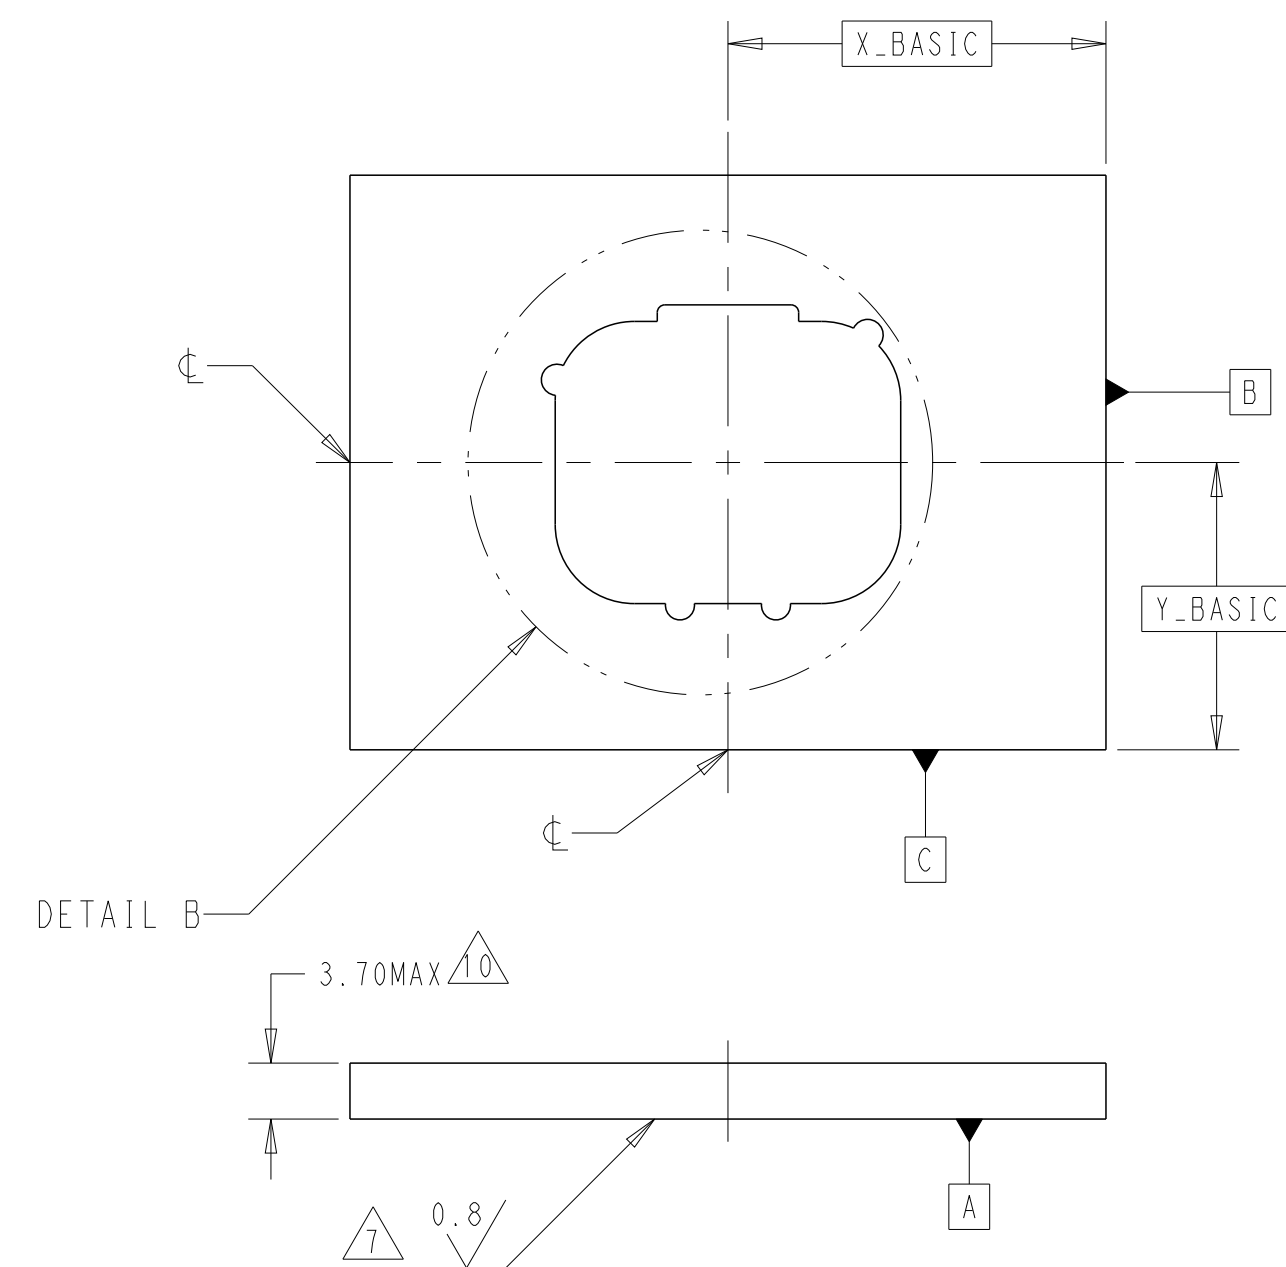
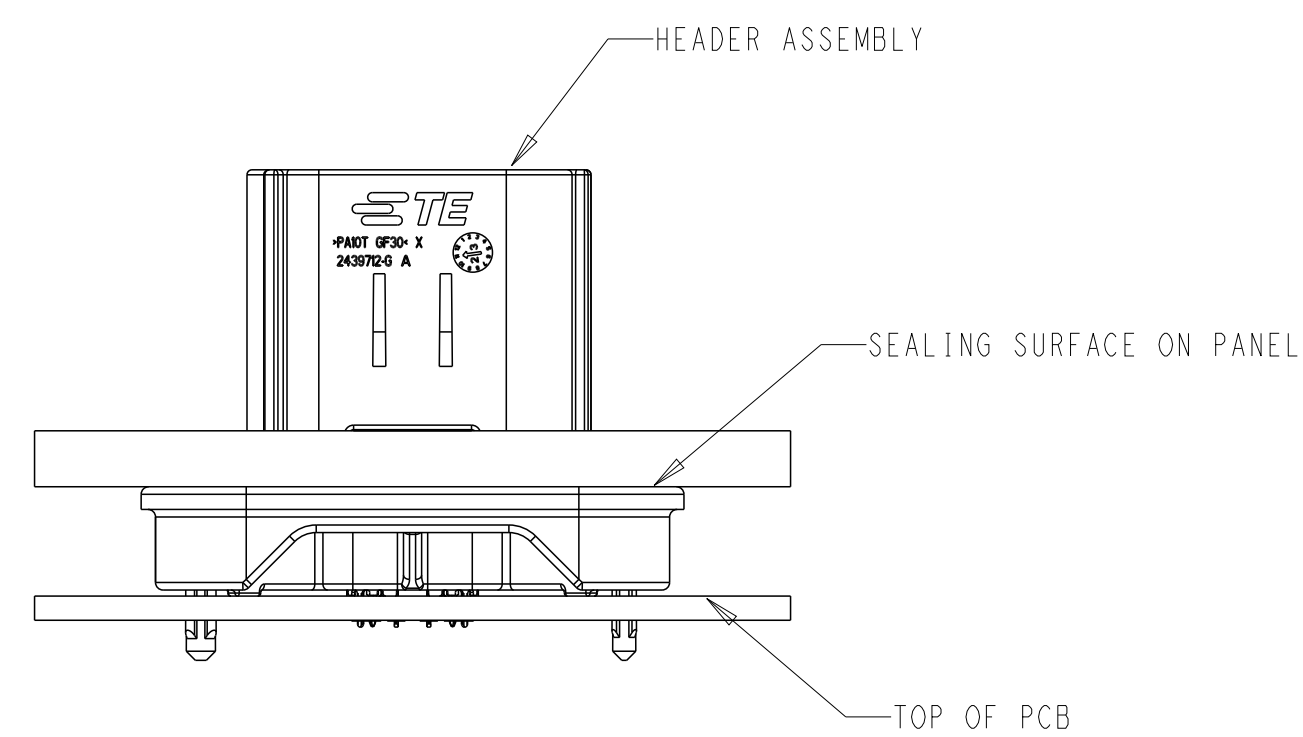
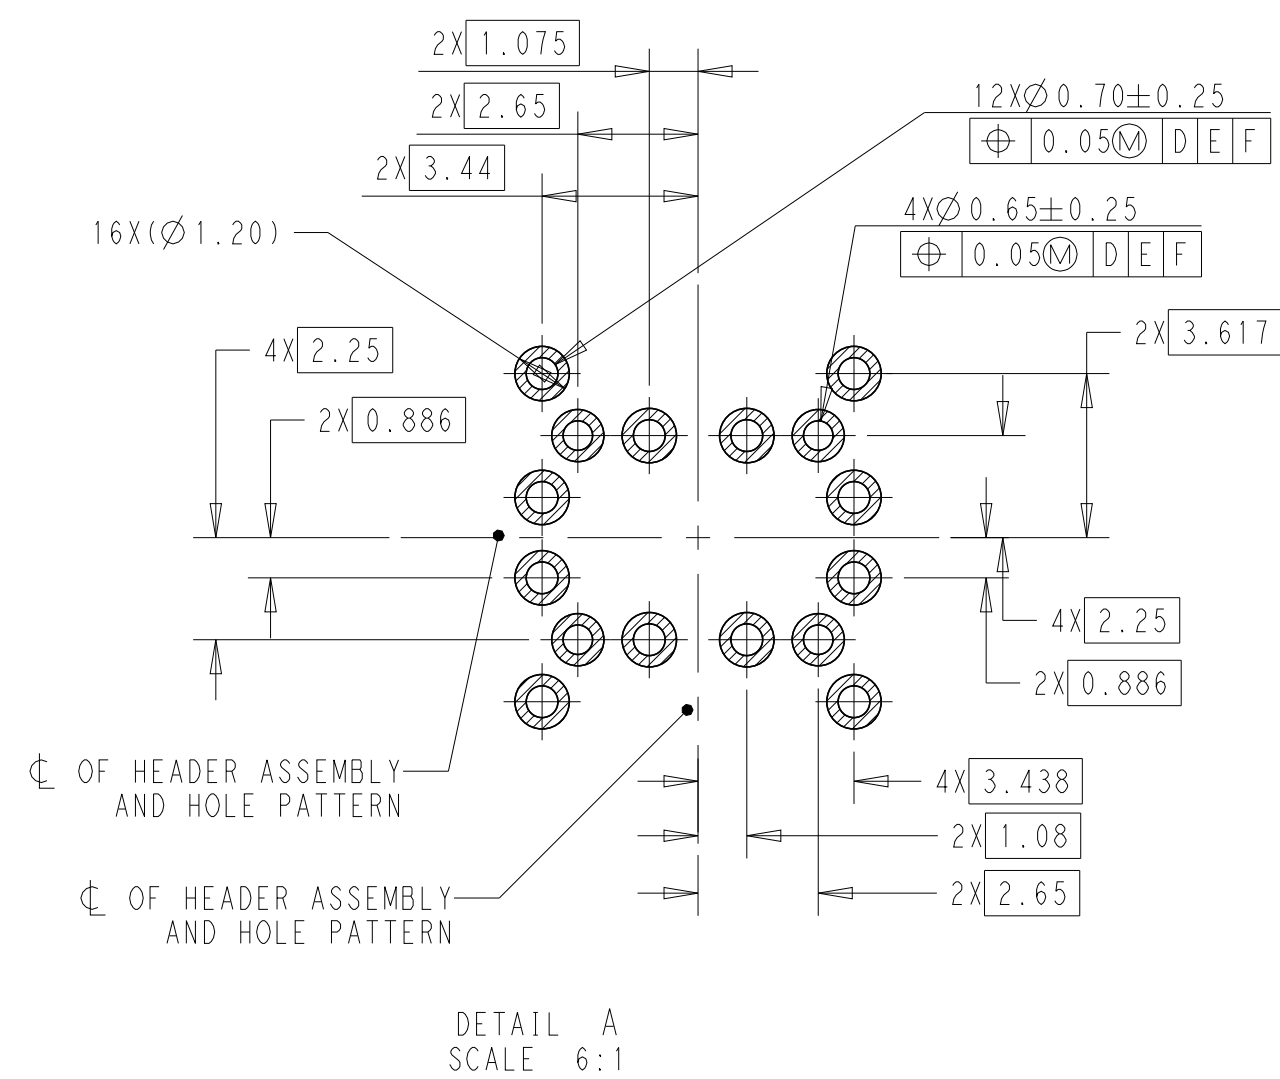


RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
SHOWN FROM CONNECTOR SIDE

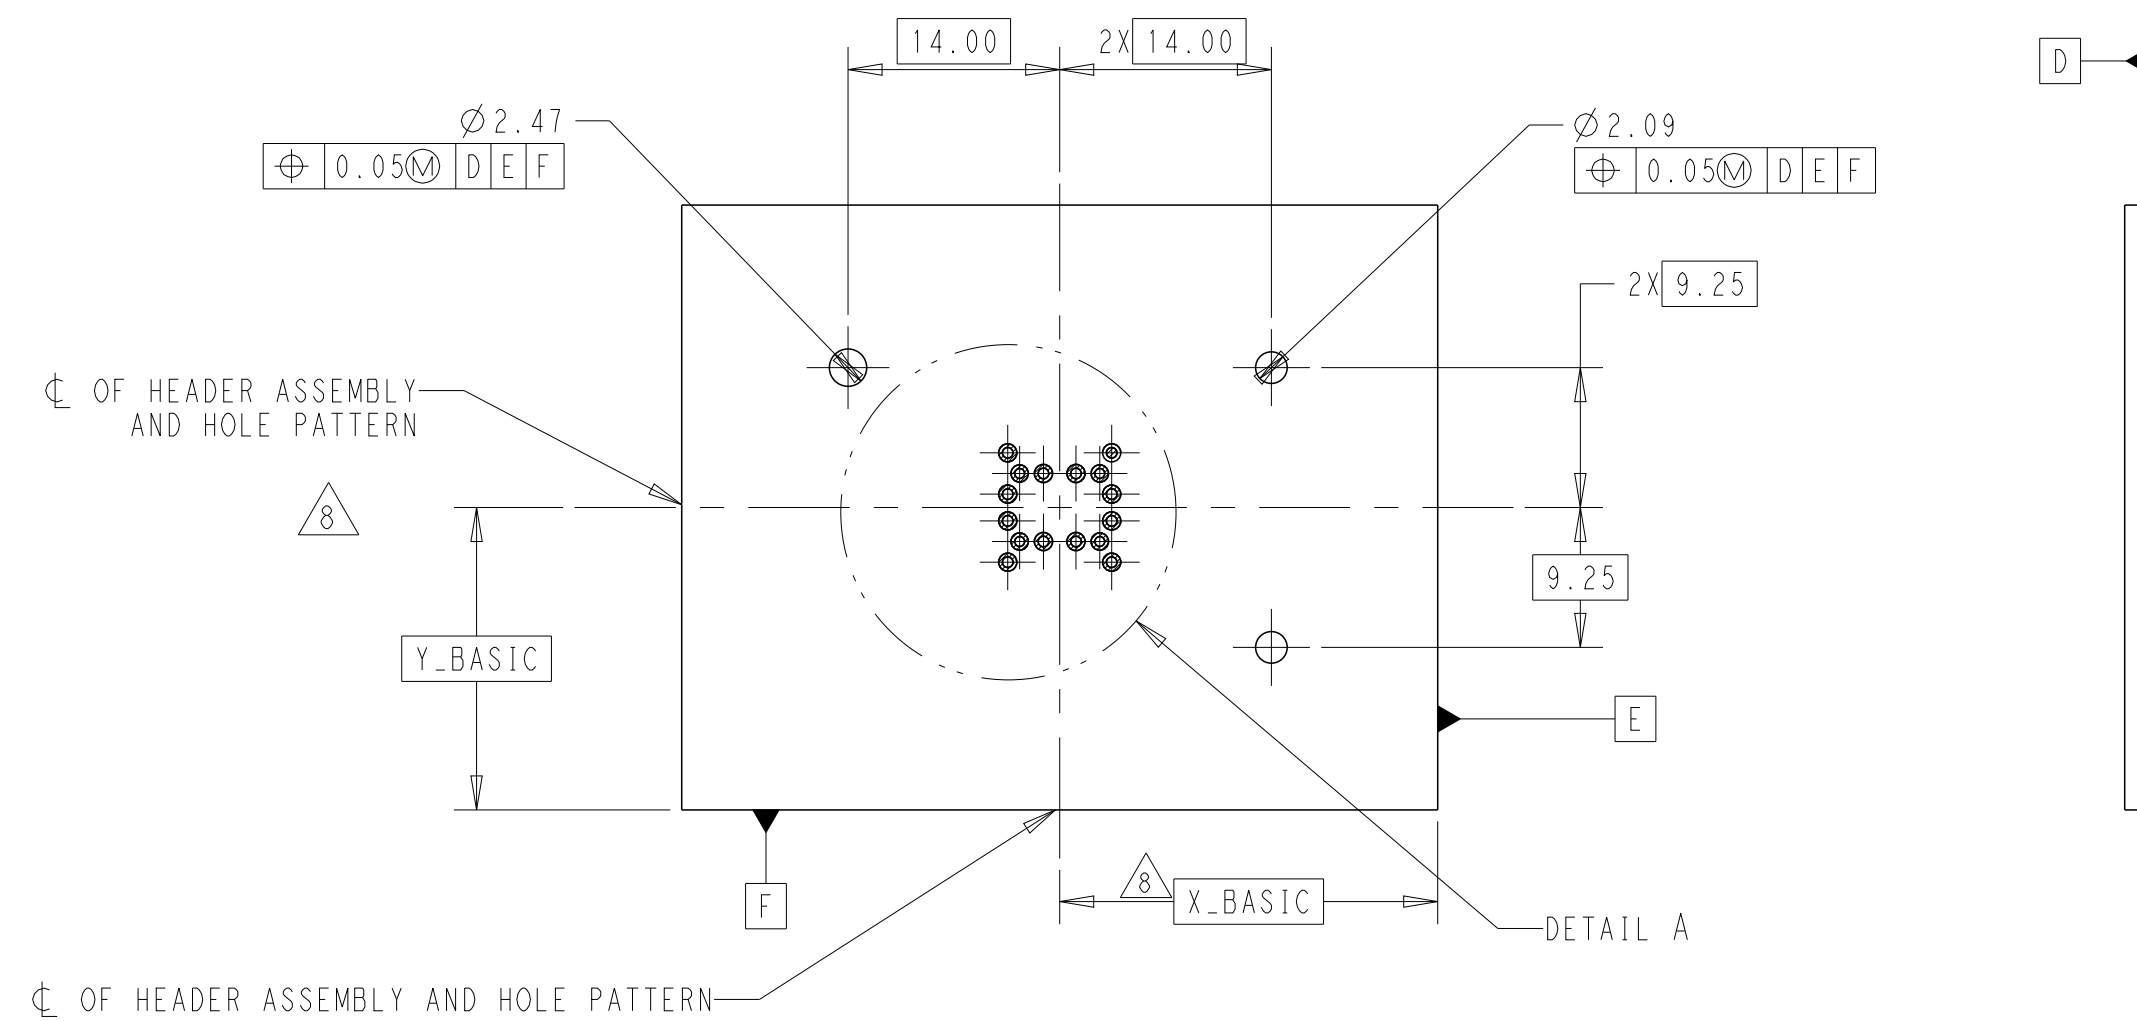

ADDITIONAL NOTES REGARDING PANEL AND PCB FITMENT:

- 5 FLANGE CLEARANCE REGION ON SEALED SIDE OF ENCLOSURE, NECESSARY FOR PROPER ASSEMBLY AND SEALING.
- 6 SEALING SURFACE WITHIN CLEARANCE REGION, NO BURRS, SCRATCHES OR TOOL MARKS ALLOWED.
- 7 SURFACE ROUGHNESS APPLIES WITHIN CLEARANCE REGION.
- 8 X-BASIC AND Y-BASIC TO BE DEFINED BY CUSTOMER.
- 9 REMOVE SHARP EDGES. R0.3MM MAX
- 10 MINIMUM PANEL THICKNESS WILL DEPEND UPON THE STRENGTH OF THE PANEL MATERIAL.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	13MAY24	K.J.S	Z.Z

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.J. SONG 26 JUN 2023 CHK M. CHEN 26 JUN 2023 APP'D Z.W. ZHOU 26 JUN 2023		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC +.1 1 PLC +.1 2 PLC +.005 3 PLC +.001 4 PLC +.0001 ANGLES ±.		NAME 4P. COAX, HDR ASSY, 180DEG AMPSEAL 16 -	
MATERIAL TBD		FINISH - - -		WEIGHT 10.015 g	
CUSTOMER DRAWING		SIZE A		CAGE CODE 00779	
DRAWING NO C=2439715		SCALE 1:1		SHEET 2 of 2	
REV A		RESTRICTED TO -			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2439715-5](#)