SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REGUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECDGNIZED: UL 1283 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 10 AMP, 120/250 VAC, 10 AMP/40°C, 250 VAC

50-60Hz

MAXIMUM LEAKAGE CURRENT,

LINE FREQUENCY:

2µA @ 120V 60Hz EACH LINE TO GROUND: 5µA @ 250V 50Hz

DPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{85 - T_0}$ $I_0 = I_r - \sqrt{85 - \overline{I_0}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT DVERLDAD TEST: 6 TIMES In FOR 8 ZECDNDZ

CUSTOMER DRAWING CATALOG # PMOSODLXC ECN # APPRVD. I DATE 22-185505 JΒ 30N0V22

TEST SPECIFICATIONS:

INDUCTANCE: 4.0 mH NDMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C) N/A

LINE TO GROUND: LINE TO LINE:

2.0µF ±20%

DISCHARGE RESISTOR:

165K ∩

L/G AND L/L I.R. ND DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDC, 20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500VAC DR 2250VDC FDR 1 MINUTE

LINE TO LINE: 1450VDC FDR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

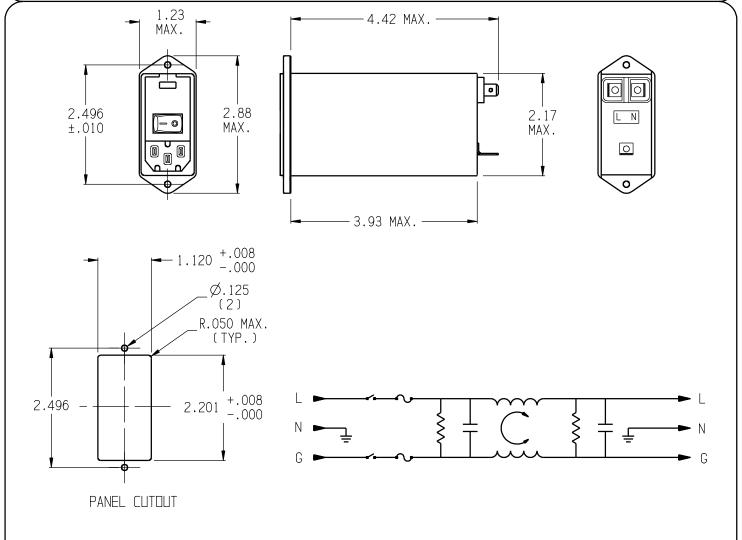

50A- 50A(MINIMUM) INSERTION LOSS									
FREQUENCY MHz	.01	. 05	. 10	. 15	.50	1.0	5.0	10.0	30.0
CDMMDN dB	5	17	22	23	24	25	21	18	14
DIFF. dB	10	20	20	35	67	75	75	70	60

THIRD ANGLE PROJECTION	
UNLESS OTHERWISE SPECIFIED, TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED	-
THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY WIS BE DISCUSSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA USA]]
	PROJECTION UNLESS DTHERWISE SPECIFIED, TOLERANCE TO BE ± .025 MATERIAL & FINISH: AS SUPPLIED THIS INFORMATION IS CONTIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSTDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS OFFEDORATION.



POWER LIN	E FILTER
-----------	----------

TYCO ELECTRON	IICS PART ND.	2-1609109-5	
SCALE: NITS	DATE:	CATALOG NO.	REV
141.2	28MAY08	DUGGGBI WG	I۸
DRW. BY:	DRIG:	PMOSODLXC	ΙU
SD	ELC		_

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

PM0S0DLXC