

AVH Series – Anti-Vandal High Current Pushbutton Switches

Applications

- Machinery.
- Automotive Electronics.
- Strict Access Control Systems.
- Shipping Equipment.
- Medical Equipment.
- Horticulture.
- Bath Accessories.



The AVH Series addresses high current applications. These high-quality Anti-Vandal switches are available in 19mm, 22mm and 25mm diameter bushings for a wide range of possible applications. In addition, AVH Series provide more options for operating, LED light types, light colors and LED voltages to fulfill the variety requirements.

The AVH Switches are characterised by contact rating of 16A, 26A/125, 250VAC.

Reference TE Customer Drawing for application instructions.

Features

AVH Series – Type Classification

| • | High current, | | |
|---|---------------|--|--|
| | 16A & 26A are | | |
| | available. | | |

- Flat Button
 Type.
- Momentary and Locking Actuation Available.
- Independent LED Control (7 color options).
- Bushing sizes,
 19, 22 & 25mm
 are available.
- UL Recognized.

| Туре | AVH19 | AVH22 | AVH25 |
|--------------------------|--|-------|-------|
| Bushing Size | 19mm | 22mm | 25mm |
| Actuation | on Momentary / Locking | | |
| Rating | 16A, 26A/ 125, 250VAC | | |
| Contact 50mΩ N | | | |
| Operation Temperature | -25°C to 85°C | | |
| Mechanical Life | 1,000,000 cycles, Momentary 500,000 cycles, Locking | | |
| Electrical Life | 50,000 cycles, 16A 10,000 cycles, 26A | | |
| Sealing | Silicone | | |
| Operation Force | 3.5±1.5N | | |
| Travel | 3.2mm | | |
| Ingress Protection | IP67, IK08 | | |
| Pollution Degree | 2, Marco and Micro | | |

S

Document 2364568-0 Rev C Date: 10-FEB-2021 Dimensions in millimetres [Inch]


Dimensions Shown for reference purposes only. Specifications subject to change

For Email, phone or live chat, go to: www.te.com/help




Bushings Types:

19mm

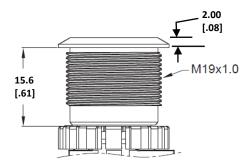


Panel Cut-out

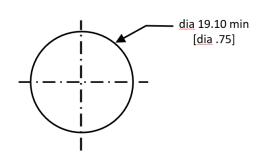


Panel Thickness: 10.0mm [.39] Maximum.

22mm




Panel Cut-out

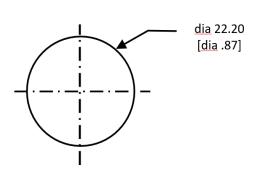


Panel Thickness: 10.0mm [.39] Maximum.

25mm

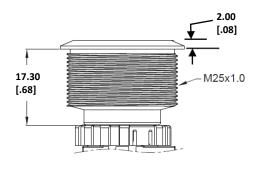

Panel Cut-out

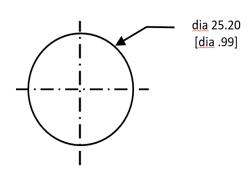

Panel Thickness: 10.0mm [.39] Maximum.

Document 2364568-0 Rev C

Date: 10-FEB-2021

Dimensions in millimetres [Inch]

Dimensions Shown for reference purposes only. Specifications subject to change


For Email, phone or live chat, go to: www.te.com/help



LED Light Types:


19mm

"O" Without LED





"P" Power Symbol

"R" Ring, moving

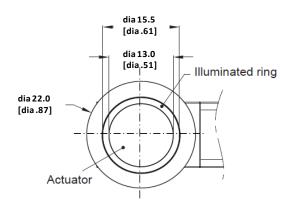


"E1" Ring + Power Symbol

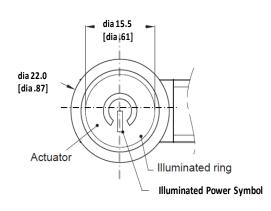

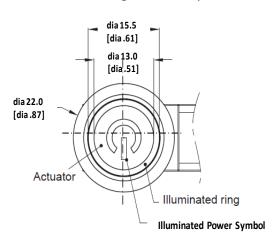


22mm


"O" Without LED



"R" Ring



"P" Power Symbol






25mm

dia 28.00 [dia 1.10]

"O" Without LED


dia 19.80 [dia .78]

dia 15.50 [dia .61]




"R" Ring


"P" Power Symbol




Terminal Types:

"16" #187 terminal, 16A

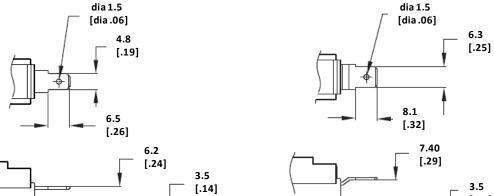

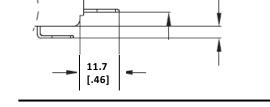



LED

"26" #250 terminal, 26A

Circuit Types:

No LED



Position 1

+ COM NO NC

Position 1


Document 2364568-0 Rev C Date: 10-FEB-2021 Dimensions in millimetres [Inch]

Dimensions Shown for reference purposes only. Specifications subject to change

For Email, phone or live chat, go to: www.te.com/help



Part numbering - How to order

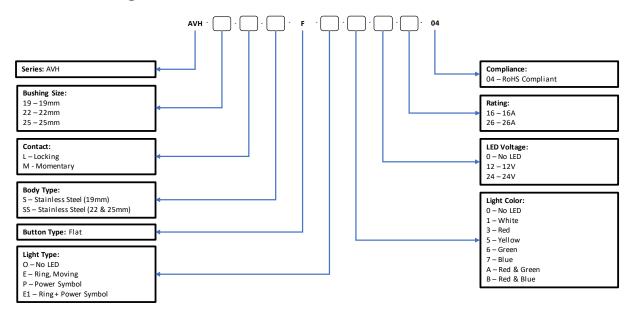

-Example PN: AVH19MSFE3122604

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

AVH22MSSFEA242604