D-150-0236 - ACTIVE

RAYCHEM

TE Internal #: 169757-000 Splices, 20 – 22 AWG Wire Size, .5 – .34 mm² Wire Size, Sealable, Copper Alloy, Red, Length 4.17 in [105.92 mm], Box, Closed, Fully Insulated

View on TE.com >

Terminals & Splices > Splices



Wire Size: .5 – .34 mm² Sealable: Yes Contact Base Material: Copper Alloy

Primary Product Color: Red

Features

Product Type Features

Sealable

Yes

Configuration Features

Splice Configuration

= TEconnectivity

Single to Single

J 🗖

Body Features	
Product Weight	5.2 g
Insulation Material	Heat Shrink Radiation-Crosslinked Modified Polyvinylidene Fluoride
Primary Product Color	Red
Contact Features	
Contact Base Material	Copper Alloy
Barrel Type	Closed
Termination Features	
Termination Method to Wire & Cable	Crimp, Solder
Dimensions	
Wire Size	.5 – .34 mm²
Product Length	105.92 mm[4.17 in]
Usage Conditions	

D-150-0236

Splices, 20 – 22 AWG Wire Size, .5 – .34 mm² Wire Size, Sealable, Copper Alloy, Red, Length 4.17 in [105.92 mm], Box, Closed, Fully Insulated



Operating Temperature Papae	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	10
Packaging Method	Box
EU RoHS Directive 2011/65/EU	Not Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant Restricted Materials Above Threshold Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Not Compliant Restricted Materials Above Threshold Current ECHA Candidate List: JAN 2024 (240)

Halogen Content

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought

D-150-0236

Splices, 20 – 22 AWG Wire Size, .5 – .34 mm² Wire Size, Sealable, Copper Alloy, Red, Length 4.17 in [105.92 mm], Box, Closed, Fully Insulated



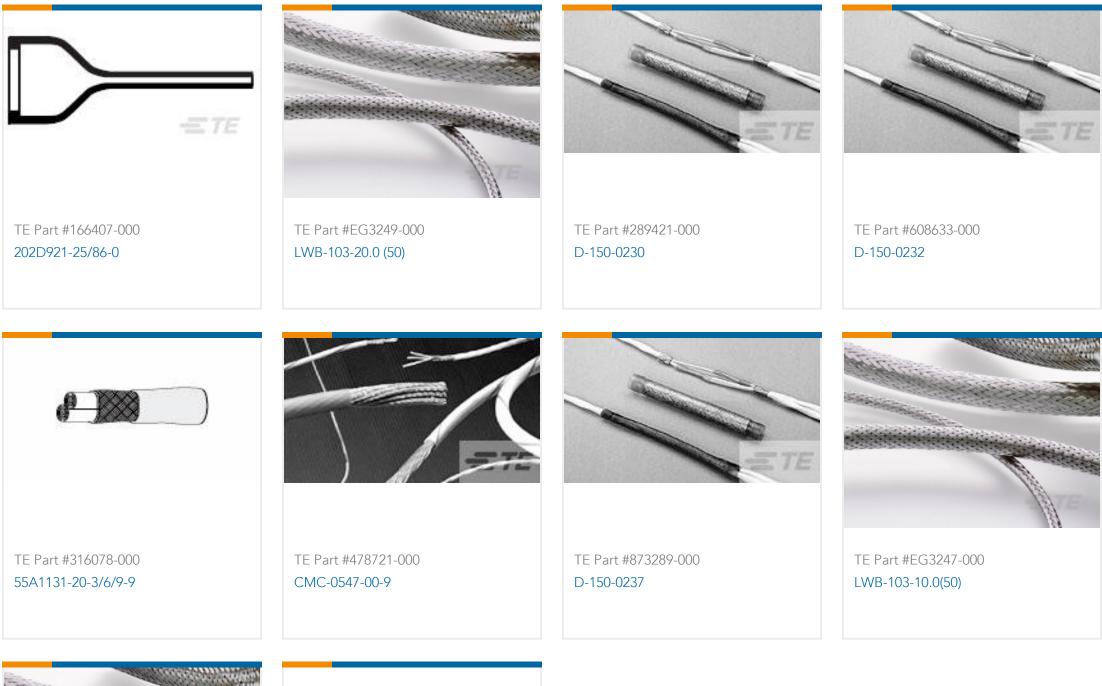

-TE



TE Part #F21712-000 10612-24-9-F871

Documents

TE Part #EG3245-000

LWB-103-6.0(50)

Product Drawings D-150-0236

English

Datasheets & Catalog Pages 1654025_Sec8_D-150

English

1654025_Sec8_D-150_D-500_DK-621

English

Harness Repair Products Quick Reference Guide

English

Product Specifications Installation Procedure for TE Connectivity Shielded Cable Splice Kits with Mini-Seal Crimp Primary Splices English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

D-150-0236