
CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



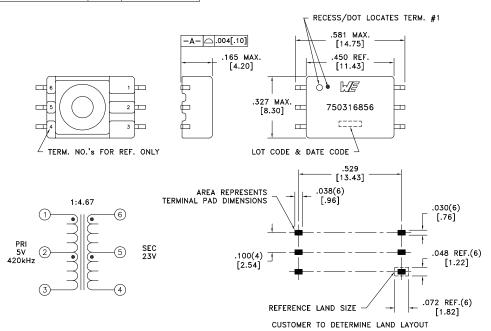

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE
<b>6</b> B	D.C. RESISTANCE	1-3	@20°C	0.295 ohms ±15%
_	D.C. RESISTANCE	6-4	@20°C	2.00 ohms ±10%
	INDUCTANCE	1-3	10kHz, 10mVAC, Ls	200uH min.
	LEAKAGE INDUCTANCE	1-3	tie(4+5+6), 100kHz, 100mVAC, Ls	200nH typ., 400nH max.
	DIELECTRIC	1-6	3125VAC, 2 seconds	2500VAC, 1 minute
	TURNS RATIO		(6-4):(1-3)	4.67:1, ±2%

## GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Supplementary insulation for a primary circuit at a working voltage of 600Vrms, 800Vpeak, Overvoltage Category II, Pollution Degree II, Material Group 1, Altitude up to 2000 meters.

Designed to comply with the following requirements as defined by IEC61010-1:

- Supplementary insulation for a mains circuit of Overvoltage Category II up to 600Vrms Line-to-Neutral, Pollution Degree II, Material Group 1, Altitude up to 2000 meters.
- Supplementary insulation for a secondary circuit derived from mains circuits of Overvoltage Category II up to 600Vrms Line-to-Neutral, Pollution Degree II, Material Group 1 at a working voltage of 600Vrms, 800Vpeak, Altitude up to 2000 meters.

VOLTAGE-TIME: 15 Vus (1-2)

OUTPUT CURRENT RATING: 145mADC causes 40°C temp rise from ambient.

COPLANARITY: All 6 terminals must lie on a plane within .004 [.10]

of Surface A after lead tinning.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	rackaging specifications	
		Method: Tape & Reel	
		PKG-1154	
6B	6/20	www.we-online.com/midcom	CONVENTION PLACEMENT
64	11/17	SEE REVISION SHEET FOR	REVISION LEVEL

DATE | Dealersing Considerations

Angles: ±1°

Tolerances unless otherwise specified: Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

## TRANSFORMER

eiSos p/n: 750316856

PART NO.

750316856

ROHS SPECIFICATION SHEET 1 OF 1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wurth Elektronik: 750316856