

PAGE 1/2

ISSUE 16.06.13

SERIE : SPDT

PART NUMBER : R570E52010

RF CHARACTERISTICS

Frequency range : **0 - 6 GHz**
Impedance : **50 Ohms**

Frequency (GHz)	DC - 3	3 - 6
VSWR max	1.20	1.30
Insertion loss max	0.20 dB	0.30 dB
Isolation min	80 dB	70 dB
Average power (*)	240 W	170 W

ELECTRICAL CHARACTERISTICS

Actuator : **LATCHING**
Nominal current ** : **210 mA**
Actuator voltage (Vcc) : **12V (10.2 to 13V) / POSITIVE COMMON**
Terminals : **solder pins (250°C max. / 30 sec.)**
Self cut-off time : **40 ms < CT < 120 ms**

MECHANICAL CHARACTERISTICS

Connectors : **QMA female per MIL-C 39012**
Life : **10 million cycles**
Switching Time*** : **< 10 ms**
Construction : **Splashproof**
Weight : **< 45 g**

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : **-40°C to +85°C**
Storage temperature range : **-55°C to +85°C**

(* Average power at 25°C per RF Path)


(** At 25° C ±10%)

(*** Nominal voltage ; 25° C)




PAGE 2/2	ISSUE 16.06.13	SERIE : SPDT	PART NUMBER : R570E52010
----------	----------------	--------------	--------------------------

DRAWING

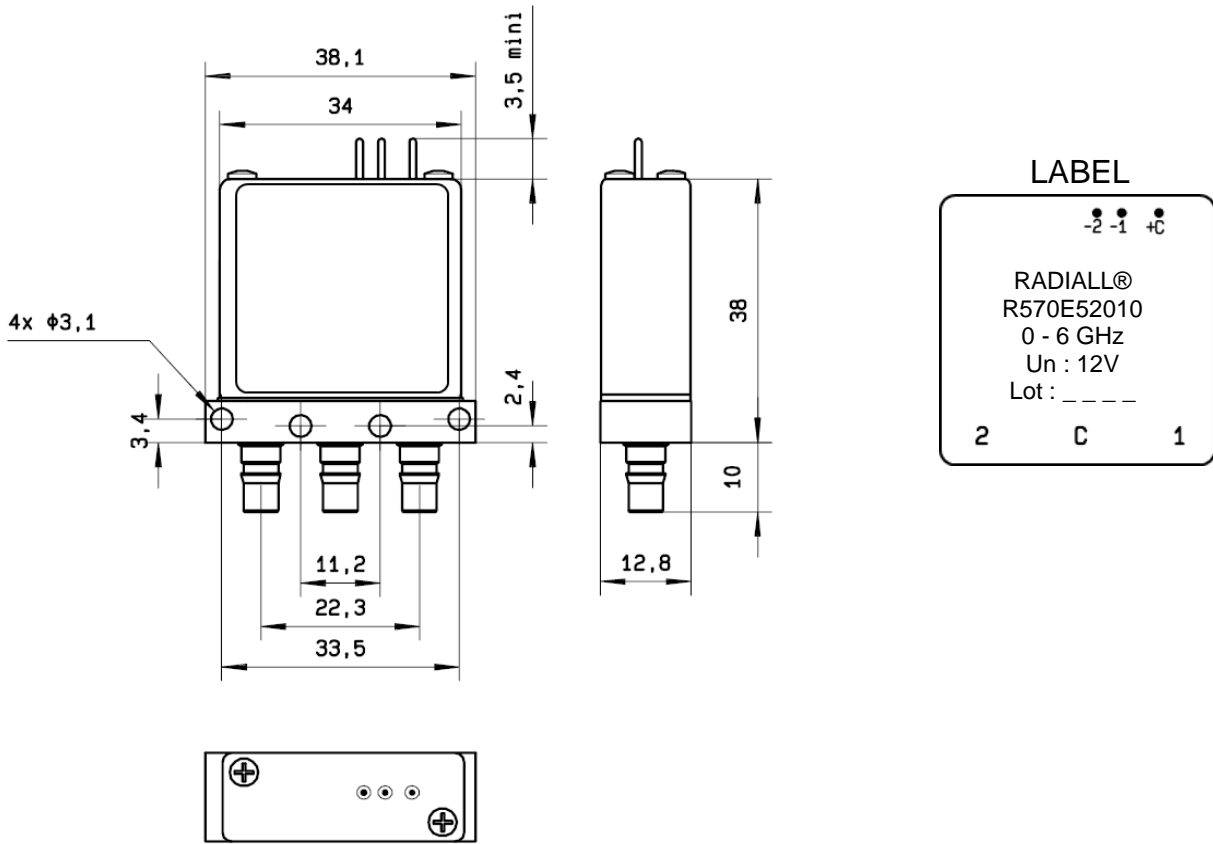

General tolerances : ±0.5 mm

SCHEMATIC DIAGRAM

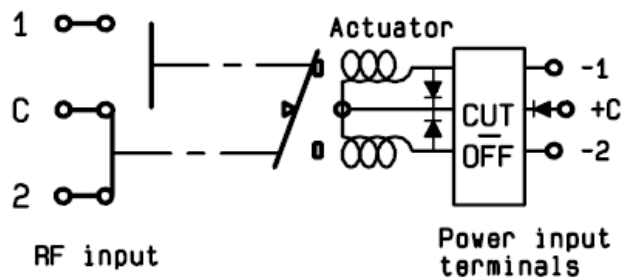

Voltage	RF Continuity
+C -1	C ↔ 1
+C -2	C ↔ 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Radial:](#)

[R570E52010](#)