


MTSW-126-09-S-S-430-RA


MTSW-203-11-T-T-740



MTSW-110-27-G-D-990

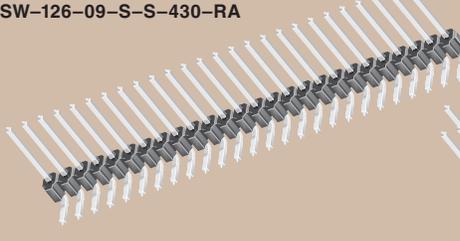

MTSW-112-12-G-Q-730-RA

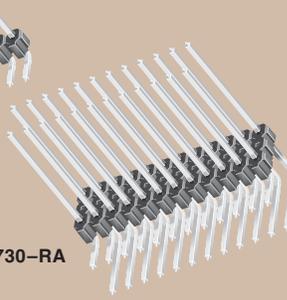

MTSW-125-07-T-S-100

STRIPS MTSW & HMTSW SERIES


PLATING OPTION

-L
= 10µ" (0,25µm) Gold on contact area,
Matte Tin on tail

-G
= 10µ" (0,25µm) Gold on contact area,
Gold flash on balance

-T
= Matte Tin

-S
= 30µ" (0,76µm) Gold on contact area,
Matte Tin on tail



ROW OPTION

-S
= Single

-D
= Double

-T
= Triple

-Q
= Double Row
.200" (5,08mm)
row space

POST HEIGHT


OTHER OPTION

POLARIZED OPTION

-“XXX”
= Polarized
(Specify ‘XXX’ as
position number)

-RA or -RE = Right Angle

-LL
= Locking Lead
(N/A with -RE)
N/A in single row 1 or 2
positions. Available on
tails from (2,29) .090" to
(10,16) .400" only




-LA = -RA Option with -LL Option
(Maximum “C” = (13,46) .530)

-“XXXX” = “C” Dimension (Specify post height in INCHES - .005" (0,13mm) increments)


| LEAD STYLE | FOR A = (2,29) .090 | | | |
|------------|---------------------|--------------------------|----------------------|----------------------|
| | OAL | C MAXIMUM STRAIGHT | C MAXIMUM w/RA | C MAXIMUM w/RE |
| -06 | (7,62) .300 | (2,79) .110 | N/A | N/A |
| -07 | (10,92) .430 | (6,10) .240 | (3,30) .130 | N/A |
| -08 | (13,46) .530 | (8,64) .340 | (5,84) .230 | (3,30) .130 |
| -09 | (18,54) .730 | (13,72) .540 | (10,92) .430 | (8,38) .330 |
| -10 | (21,08) .830 | (16,26) .640 | (13,46) .530 | (10,92) .430 |
| -11 | (23,62) .930 | (18,80) .740 | (16,00) .630 | (13,46) .530 |
| -12 | (26,16) 1.030 | (21,34) .840 | (18,54) .730 | (16,00) .630 |
| * -13 | (31,24) 1.230 | (26,42) 1.040 | (23,62) .930 | (21,08) .830 |
| * -21 | (36,32) 1.430 | (31,50) 1.240 | (28,70) 1.130 | (26,16) 1.030 |
| * -22 | (41,40) 1.630 | (36,68) 1.440 | (33,78) 1.330 | (31,24) 1.030 |
| * -23 | (46,48) 1.830 | (41,86) 1.640 | (38,96) 1.530 | (36,32) 1.130 |
| * -24 | (51,56) 2.030 | (47,04) 1.840 | (44,14) 1.730 | (41,40) 1.330 |
| * -27 | (56,64) 2.230 | (52,22) 2.040 | (49,32) 1.930 | (46,48) 1.530 |
| * -28 | (61,72) 2.430 | (57,40) 2.240 | (54,50) 2.130 | (51,56) 1.730 |

* Styles -21, -23, -24, -27
not available with -D Right Angle
Styles -13, -21, -23, -24, -27, -28
not available with -T or -Q Right Angle


Straight Pin Versions A = OAL - C - (2,54) .100

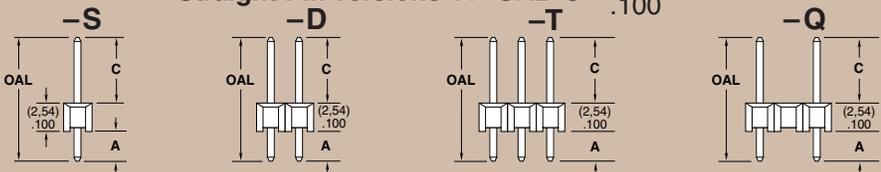

Right Angle Versions (-RA Options) A = OAL - C - (5,33) .210
Styles -13, -21, -23, -24, -27, -28 N/A with -T or -Q

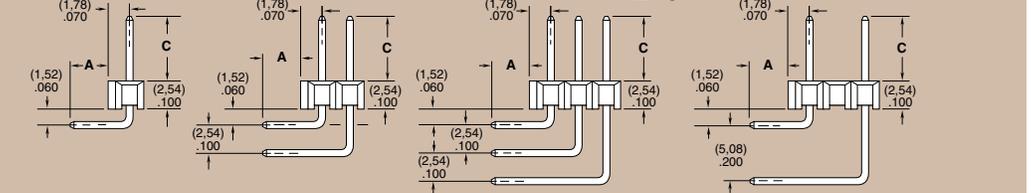

Right Angle Versions (-RE Options) Single Row Only
A = OAL - C - (7,87) .310



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[MTSW-118-08-S-D-270](#)